

# Polarization-independent InP-based phased-array wavelength demultiplexer with flattened wavelength response

**Citation for published version (APA):**

Spiekman, L. H., Ham, van, F. P. G. M., Demeester, P., Kuntze, A., Smit, M. K., & Pedersen, J. W. (1994). Polarization-independent InP-based phased-array wavelength demultiplexer with flattened wavelength response. In *20th European Conference on Optical Communication : ECOC '94* (pp. 759-762). Istituto Internazionale delle Comunicazioni.

**Document status and date:**

Published: 01/01/1994

**Document Version:**

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

**Please check the document version of this publication:**

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

**General rights**

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

[www.tue.nl/taverne](http://www.tue.nl/taverne)

**Take down policy**

If you believe that this document breaches copyright please contact us at:

[openaccess@tue.nl](mailto:openaccess@tue.nl)

providing details and we will investigate your claim.

# POLARIZATION-INDEPENDENT InP-BASED PHASED-ARRAY WAVELENGTH DEMULTIPLEXER WITH FLATTENED WAVELENGTH RESPONSE.

L.H. Spiekman

F.P.G.M. van Ham

A. Kuntze \*

J.W. Pedersen †

P. Demeester ‡

M.K. Smit

Dept. of Electrical Engineering  
Delft University of Technology  
P.O. Box 5031, 2600 GA Delft  
The Netherlands

## Abstract

We have realized the first wavelength-flattened polarization-independent phasor demultiplexer. The device operates at  $1.54\mu\text{m}$  with excess loss lower than 5 dB and crosstalk better than  $-14$  dB over a range of 0.3 nm, and has four channels with 1 nm spacing.

## 1 Introduction

Wavelength Division Multiplexing (WDM) provides a simple and effective method for exploiting the large bandwidth of optical fibres. An important component in WDM-systems is the wavelength demultiplexer. Because of the undefined polarization state of the input signal from the optical fibre, polarization independent operation of this demultiplexer is an important feature.

Polarization independent phased array demultiplexers have been demonstrated using a number of different methods: A  $\lambda/2$  plate inserted in the middle of the array waveguides [1], waveguides loaded with a birefringence-compensating film [2], non-birefringent waveguides composed of Q(0.97) material [3], and a phased array design with a free spectral range equal to the waveguide TE-TM shift [4].

The first approach fundamentally yields polarization independent behaviour through  $90^\circ$  polarization rotation halfway the completely symmetrical design. The other three depend on accurate waveguide design and fabrication technology to obtain the desired polarization independence. They have the advantage of being fully monolithical. Using these methods, the requirements on process control in order to tune TE and TM to each other are very tight. These requirements can be strongly relieved if the TE and TM response are flattened. We therefore combined the approach applied by [4] with the wavelength-flattening as applied in [5].

## 2 Design

A phased array demultiplexer consists of a dispersive waveguide array connected to input and output waveguides by two star couplers. The field from an input waveguide is reproduced in the output plane when the optical path length difference between adjacent array waveguides is an integral number of wavelengths. A change in the wavelength induces a tilt of the equi-phase plane at the array output, thereby sweeping the field distribution over the output waveguides and enabling spatial separation of different wavelengths.

\*Dept. of Applied Physics, Delft University of Technology, The Netherlands

†PTT Research, Leidschendam, The Netherlands

‡Dept. of Information Technology, University of Gent, Belgium

The array waveguide birefringence causes a spatial separation of the field distributions for TE and TM for the same wavelength *in vacuo* (see fig. 1). Because the birefringence of our waveguide structure cannot be reduced sufficiently to make the same array orders for TE and TM overlap, an array design has been adopted for which the  $m$ th order for TE overlaps with the  $m - 1$ th order for TM [6]. This is obtained by choosing the distance of the orders (i.e. the FSR) equal to the waveguide TE-TM shift.

Because the TE-TM shift of our waveguide structure is 4.05 nm, the FSR of the phasor can accommodate four channels with a spacing of 1 nm. A slight deviation of the (calculated) TE-TM shift of only a few percent will, however, separate the overlapping TE and TM orders, and destroy the polarization independence of the device. To reduce the severity of the consequences of such a deviation, the phased array was equipped with wider, multimode output waveguides. This causes the focal spot in the image plane to couple efficiently to the output waveguides over a wider wavelength range [5] (see fig. 2). A limited deviation of the TE-TM shift can thus be tolerated, retaining polarization independent operation, over a slightly reduced wavelength range.

The demultiplexer designed consists of 39 waveguides, 2  $\mu$ m wide, with a path length difference of 153  $\mu$ m between adjacent arms. The radius of curvature varies from 500 to 1114  $\mu$ m. The input waveguides are also 2  $\mu$ m wide. The output waveguides are 6  $\mu$ m wide and are spaced 3  $\mu$ m apart in the output plane. The lateral contrast in the output section was increased with a second (non-critical) etching step in order to prevent the higher order modes in this section from radiating.

The total device size is 2.2  $\times$  3.4 mm excluding the input and output branches, and 3.3  $\times$  5.1 mm including them.

### 3 Fabrication

The demultiplexer was made on a SI-InP substrate with MOVPE-grown epilayers [7]: 660 nm InGaAsP(1.3) and 320 nm InP. The device was patterned in a 140 nm thick RF-sputtered SiO<sub>2</sub> masking layer and then etched 400 nm with an optimized RIE etching/descumming process [8]. In a second non-critical masking step the device was protected with photoresist and the output waveguides were etched an additional 50 nm. Finally, the chip was cleaved and AR-coated with a SiO<sub>2</sub> layer evaporated onto the waveguide facets.

### 4 Results

The chip was measured with light from an HP 8168A tunable laser source, which was coupled into the waveguides with a tapered fibre tip. The emanating light from the output waveguides was imaged onto a Ge-detector through a pinhole with a microscope objective. Fig. 3 shows the output power of the four receiver channels calibrated against straight reference waveguides. The excess loss of the device is 2.5–4.5 dB, and the crosstalk is below –14 dB. The attenuation of the reference waveguides is 1.5 dB/cm, both for TE and TM, measured with the Fabry-Perot method, before AR coating.

### 5 Discussion

As seen in fig. 3, the curves for TE and TM do not overlap completely. Instead of the calculated 4.05 nm TE-TM shift, a shift of 4.2 nm is observed. By virtue of the flattened response, however, there is still a range of at least 0.3 nm/channel over which the device performs with an excess loss less than 5 dB and crosstalk lower than –14 dB.

### Acknowledgements

The authors wish to thank A.H. de Vreede and C.R. de Boer for assistance in fabricating the device, and M.R. Amersfoort and B.H. Verbeek for helpful discussions.

### References

- [1] H. Takahashi, Y. Hibino, and I. Nishi, "Polarization-insensitive arrayed-waveguide grating wavelength multiplexer on silicon," *Opt. Lett.*, vol. 17, pp. 499–501, Apr. 1992.

- [2] H. Takahashi, Y. Hibino, Y. Ohmori, and M. Kawachi, "Polarization-insensitive arrayed-waveguide wavelength multiplexer with birefringence compensating film," *IEEE Photon. Technol. Lett.*, vol. 5, pp. 707–709, June 1993.
- [3] B. H. Verbeek, A. A. M. Staring, E. J. Jansen, R. van Roijen, J. J. M. Binsma, T. van Dongen, M. R. Amersfoort, C. van Dam, and M. K. Smit, "Large bandwidth polarisation independent and compact 8 channel PHASAR demultiplexer/filter," in *OFC/I/OOC '94 Postdeadline papers*, pp. 63–66, San Jose, California, Feb. 20–25 1994.
- [4] M. Zirngibl, C. H. Joyner, L. W. Stulz, T. Gaiffe, and C. Dragone, "Polarization independent  $8 \times 8$  waveguide grating multiplexer on InP," *Electron. Lett.*, vol. 29, pp. 201–202, Jan. 1993.
- [5] M. R. Amersfoort, C. R. de Boer, F. P. G. M. van Ham, M. K. Smit, P. Demeester, J. J. G. M. van der Tol, and A. Kuntze, "A phased-array wavelength demultiplexer with flattened wavelength response," *Electron. Lett.*, vol. 30, 1994.
- [6] M. K. Smit, *Integrated Optics in silicon-based aluminum oxide*. PhD thesis, Delft University of Technology, Delft, The Netherlands, 1991. ISBN 90-9004261-X.
- [7] I. Moerman, G. Coudenys, P. Demeester, B. Turner, and J. Crawley, "Influence of gas mixing on the lateral uniformity in horizontal MOVPE reactors," *J. Crystal Growth*, vol. 107, pp. 175–180, 1991.
- [8] L. H. Spiekman, F. P. G. M. van Ham, M. Kroonwijk, Y. S. Oei, J. J. G. M. van der Tol, F. H. Groen, and G. Coudenys, "A new fabrication process for very low-loss narrow-width InGaAsP/InP waveguides," in *Proc. 6th Conf. on Integr. Opt. ECIO '93*, pp. 2.30–2.31, Neuchâtel, Switzerland, April 18–22 1993.

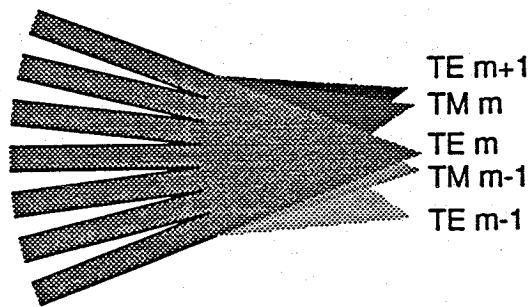


Figure 1: The different orders radiating from the waveguide array. The waveguide birefringence causes the TE and TM foci to be separated.

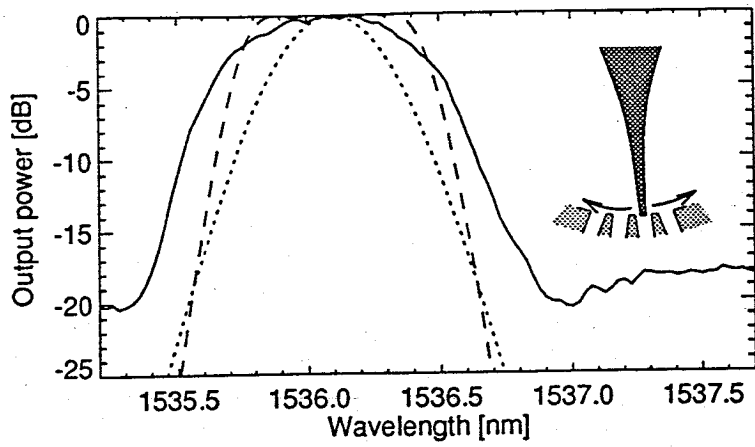


Figure 2: Calculated response of phased array with monomode (dotted) and multimode (dashed) output waveguides, and measured response of channel 2 of the realized phased array (solid). The inset shows a representation of the image plane of the flattened demultiplexer.

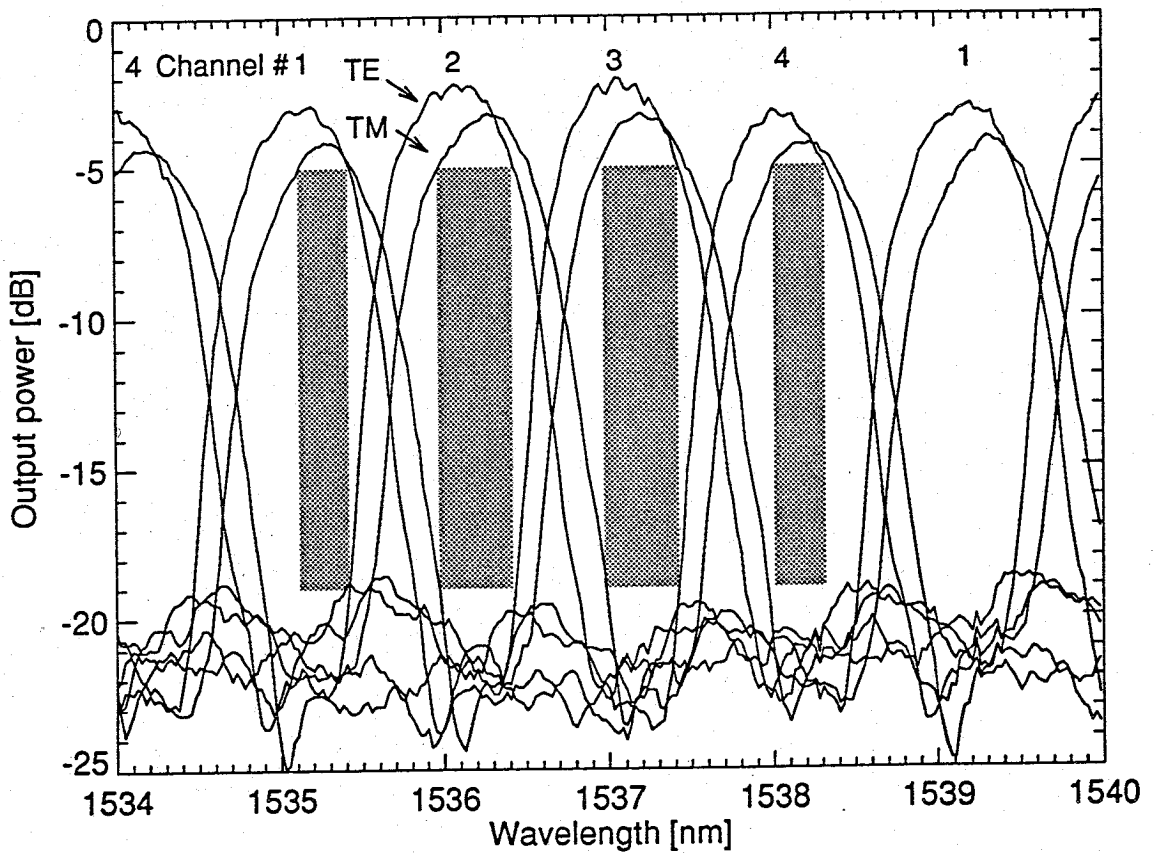


Figure 3: Spectral response of the phased array demultiplexer, calibrated against straight reference waveguides. The regions in which the device works with less than 5 dB excess loss and better than -14 dB crosstalk for both polarizations has been shaded. Adjacent orders are also visible.