

## Iterative learning control with wavelet filtering

***Citation for published version (APA):***

Merry, R. J. E., & Molengraft, van de, M. J. G. (2005). Iterative learning control with wavelet filtering. In *Proceedings of the 24th Benelux Meeting on Systems and Control, March 22-24, 2005, Houffalize, Belgium* (pp. 62-)

***Document status and date:***

Published: 01/01/2005

***Document Version:***

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

***Please check the document version of this publication:***

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

***General rights***

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

[www.tue.nl/taverne](http://www.tue.nl/taverne)

***Take down policy***

If you believe that this document breaches copyright please contact us at:

[openaccess@tue.nl](mailto:openaccess@tue.nl)

providing details and we will investigate your claim.

# Iterative learning control with wavelet filtering

R.J.E. Merry  
Eindhoven University of Technology  
Department of Mechanical Engineering  
Control Systems Technology Group  
P.O. Box 513, 5600 MB Eindhoven  
The Netherlands  
Email: R.J.E.Merry@student.tue.nl

M.J.G. v.d. Molengraft  
Eindhoven University of Technology  
Department of Mechanical Engineering  
Control Systems Technology Group  
P.O. Box 513, 5600 MB Eindhoven  
The Netherlands  
Email: M.J.G.v.d.Molengraft@tue.nl

## 1 Introduction

Iterative Learning Control (ILC) is an efficient method to derive a feedforward signal for systems which follow the same trajectory repeatedly. Two kind of errors occur when following a trajectory; repetitive and non-repetitive errors. The derived feedforward signal only compensates for the repetitive part of the error. The non-repetitive errors deteriorate the performance of ILC [1].

The goal of the research is to develop a wavelet-based filtering method to filter out the non-repetitive part of the error signal and with this improve the tracking performance of ILC.

## 2 Disturbances in ILC

When ILC is applied to a system  $P$  with feedback controller  $C$ , the learning filter  $L$  is based on a model of the process sensitivity  $S_P = P/(1+PC)$ . Robustness against modeling errors is obtained by means of a filter  $Q$ . The feedforward update  $f_{k+1}$  is calculated from the error signal  $e_k$  as:

$$f_{k+1} = Q(f_k + Le_k) \quad (1)$$

The tracking error at iteration  $k$  for a closed loop system with input disturbance  $n_k$  and output disturbance  $d_k$  can be formulated, with the sensitivity  $S = 1/(1 + PC)$  and the reference trajectory  $r$ , as:

$$e_k = Sr - Sd_k - S_P n_k - S_P f_k \quad (2)$$

Using Eqs. 1 and 2, the tracking error of iteration  $k$  can be calculated as a function of  $r$ ,  $n_k$  and  $d_k$ . The resulting error equation depends on the disturbance signals of the current and the previous iterations. It can be shown that the disturbance signals of the last two iterations have the largest influence on the tracking error.

## 3 Wavelet filtering

Whereas in [2] the feedforward signal of ILC is filtered using a time-frequency analysis, this research focusses on the

tracking error directly using a Discrete Wavelet Transform (DWT). The DWT uses an analysis wavelet filter bank to decompose the error signal into wavelet coefficients at various frequency bands [3].

The wavelet coefficients of the repetitive part of the error are equal for error signals of subsequent experiments, whereas the non-repetitive part results in different wavelet coefficients. The resemblance between the coefficients of various error signals is calculated using an error criterion. The coefficients which not do meet the error criterion are adjusted.

The adjusted wavelet coefficients are used in a synthesis wavelet filter bank to construct a filtered error signal. The reconstructed error signal is used as input for the learning algorithm of ILC (see Fig. 1).

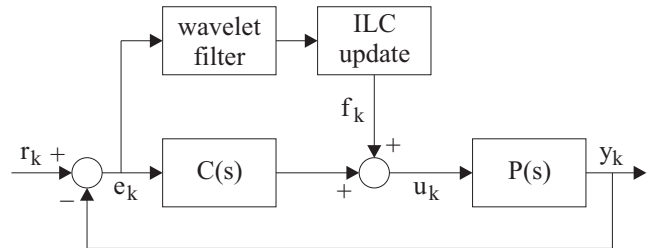


Figure 1: ILC scheme with wavelet filtering

The presentation will discuss the state of affairs in the project.

## References

- [1] M. Norrlöf and S. Gunnarson. Disturbance aspects of iterative learning control. *Engineering Applications of Artificial Intelligence*, Elsevier, 14:87-94, 2001.
- [2] A.I. Rotariu, R.M.L. Ellenbroek and M. Steinbuch. Time-frequency analysis of a motion system with learning control. *Proceedings of the American Control Conference*, June, 2003.
- [3] G. Strang and T. Nguyen. *Wavelets and Filter Banks*. Wellesley-Cambridge Press, second edition, 1997.