

# Influence of airfoil maximum thickness on aerodynamic performance of vertical axis wind turbines

**Citation for published version (APA):**

Rezaeiha, A., Montazeri, H., & Blocken, B. (2018). Influence of airfoil maximum thickness on aerodynamic performance of vertical axis wind turbines. In *Winercost18 - The International Conference On Wind Energy Harvesting, 21-23 March 2018, Catanzaro Lido, Italy*

**Document license:**

CC BY

**Document status and date:**

Published: 01/01/2018

**Document Version:**

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

**Please check the document version of this publication:**

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

**General rights**

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

[www.tue.nl/taverne](http://www.tue.nl/taverne)

**Take down policy**

If you believe that this document breaches copyright please contact us at:

[openaccess@tue.nl](mailto:openaccess@tue.nl)

providing details and we will investigate your claim.

# Influence of Airfoil Maximum Thickness on Aerodynamic Performance of Vertical Axis Wind Turbines

Abdolrahim Rezaeiha<sup>a</sup>, Hamid Montazeri<sup>a,b</sup>, Bert Blocken<sup>a,b</sup>

<sup>a</sup>Building Physics and Services, Department of the Built Environment, Eindhoven University of Technology, P.O. Box 513, 5600 MB Eindhoven, The Netherlands

<sup>b</sup>Building Physics Section, Department of Civil Engineering, KU Leuven, Kasteelpark Arenberg 40 – Bus 2447, 3001 Leuven, Belgium

Email: [a.rezaeiha@tue.nl](mailto:a.rezaeiha@tue.nl)

## ABSTRACT

Airfoil shape can significantly influence the aerodynamic performance of vertical axis wind turbines (VAWTs). However, while the symmetric NACA airfoil series are widely used for VAWTs, the effect of parameters, which define the shape of an airfoil, on the aerodynamic performance of VAWTs has not yet been extensively studied. The current study, therefore, intends to systematically investigate the effect of airfoil maximum thickness  $t_m$  on the aerodynamic performance of VAWTs for different tip speed ratios ( $\lambda$ ). Unsteady Reynolds-Averaged Navier-Stokes (URANS) calculations are performed on high-resolution grid. The results show that the optimum  $t_m$  decreases from 24% (airfoil chord) to 12% when  $\lambda$  increases from 2.5 to 5.5. As higher  $\lambda$  corresponds to lower variations of angle of attack ( $\alpha$ ) of the blades, the better performance of thinner airfoils at such  $\lambda$  is associated to their higher  $C_l/C_d$  at such  $\alpha$ . Higher stall angle could explain the higher  $C_p$  of thicker airfoils at low  $\lambda$ . The current findings could support the optimization of airfoils for VAWTs.

## 1. Introduction

Vertical axis wind turbines (VAWTs) have recently received growing interest. The renewed interest, which is mainly for offshore applications [1] and in the built environments [2], stems from advantages including omnidirectional capability, low manufacturing, installation and maintenance costs, lower noise, robustness, reliability and scalability. Many studies have focused to further clarify the underlying physics of VAWTs, which is highly driven by complex flow phenomena such as dynamic stall and blade-wake interactions [3].

Characterization and improvement of the aerodynamic performance of VAWTs have also been the center of attention where many operational and geometrical parameters such as tip speed ratio  $\lambda$  [4, 5], solidity [6, 7], number of blades [8], pitch angle [9], turbine shaft size [10] have been studied. Earlier studies have shown the important impact of the airfoil shape as it can significantly influence the aerodynamic performance of VAWTs. However, the employed airfoils for VAWTs are mainly the symmetric NACA airfoil series, which have been originally designed for aeronautical applications, i.e. helicopters. An extensive literature study shows that high-fidelity numerical studies on airfoil shapes for VAWTs have been performed for random lists of airfoils. Singh et al. [11] and Asr et al. [12] experimentally studied three different airfoils on VAWTs while their focus was on starting behavior of the turbine rather than characterizing the effect of the airfoil shape on the aerodynamic performance of the turbine. Mohammad [13] and Elkhoury et al. [14] numerically studied several symmetric and asymmetric airfoils for VAWTs, while the comparison of the computational settings employed in these studies were not in line with the minimum requirements for computational settings suggested by CFD guidelines in the literature [15, 16] which have compromised the accuracy of these calculations.

To the best of our knowledge, therefore, a systematic analysis of the effect of parameters defining the shape of the airfoil on aerodynamic performance of VAWTs for different operating conditions has not yet been performed. These important parameters include airfoil maximum thickness  $t_m$ , position of maximum thickness, leading edge radius, maximum camber and position of maximum camber.

The current study, therefore, intends to investigate the effect of  $t_m$  on the aerodynamic performance of VAWTs for different  $\lambda$  values from 2.5 to 5.5.  $t_m$  varies from 10 to 24% corresponding to NACA0010-NACA0024 airfoils. The evaluation is based on extensive verification and validation.

The outline of the paper is as follows: the computational settings and parameters are presented in section 2 where the geometrical and operational characteristics of the turbine, computational domain and grid, solver settings and verification and validation studies are discussed. Section 3 presents the CFD results. The conclusions are provided in section 4.

## 2. Computational settings and parameters

The geometrical and operational characteristics of the wind turbine are described in Table 1. To simulate the turbine rotation, a computational domain with a rotating core is created where a sliding grid interface with the surrounding fixed domain is employed. The domain width, the distance from the turbine center to the domain inlet and outlet are  $20d$ ,  $10d$  and  $25d$ , respectively. Note that the dimensions of the computational domain are chosen based on the CFD guidelines in the literature [15, 16]. The diameter of the rotating core is  $1.5d$ . A high-resolution computational grid consisting of approximately 400,000 quadrilateral cells is generated where the maximum  $y^+$  on the blade walls are below 4 for all cases. The commercial CFD code ANSYS Fluent 16.1 is used to perform the simulations. Incompressible unsteady Reynolds-averaged Navier-Stokes (URANS) simulation are performed in combination with the 4-equation transition SST model [17]. Second-order temporal and spatial discretization and the SIMPLE pressure-velocity coupling scheme are used. The azimuthal increment is  $0.1^\circ$  and the data sampling is initiated after 20 turbine revolutions to reach a statically steady solution. The boundary conditions are uniform velocity inlet, zero gauge pressure outlet, symmetry sides and no-slip walls. The computational settings are according to the guidelines by Rezaeiha et al. [15, 16]. The evaluations are based on extensive verification and validation [9, 10, 15].

Table 1. Geometrical and operational characteristics of the VAWT.

Parameter	Value	Parameter	Value
Number of blades, $n$	2	Airfoil chord, $c$ [m]	0.06
Diameter, $d$ [m]	1	Shaft diameter [m]	0.04
Height, $H$ [m]	1	Freestream velocity, $U_\infty$ [m/s]	9.3
Solidity, $\sigma$ [-]	0.12	Freestream total turbulence intensity	5%

## 3. Effect of airfoil maximum thickness

Symmetric NACA airfoil series with  $10\%c \leq t_m \leq 24\%c$  (see Fig. 1) are employed to investigate the effect of airfoil maximum thickness on the aerodynamic performance of VAWTs within a wide range of  $\lambda$  values from 2.5 to 5.5. The airfoils have their maximum thickness at 30% of the chord from the leading edge.

Turbine power coefficients  $C_p$  calculated for the last turbine revolution with the different airfoils, shown in Fig. 1, are depicted in Fig. 2a for different values of  $\lambda$ . The comparison shows that at high  $\lambda$  ( $\geq 3.5$ ), thinner airfoils outperform the thicker airfoils while this reverses for  $\lambda < 3.5$  where thicker airfoils yield in higher  $C_p$ . To further clarify the effect of  $t_m$  on  $C_p$ , Fig. 2b shows the variations of  $C_p$  versus  $t_m$  for different  $\lambda$  values. It can be seen that for  $\lambda = 2.5$ , as  $t_m$  increases,  $C_p$  monotonically increases. The improvement of 294% is achieved when  $t_m$  increases from 10% to 24%. For  $2.5 < \lambda \leq 5.5$ , however, there exists an optimal  $t_m$  ( $t_{m,opt}$ ). By increasing  $\lambda$  from 3.0 to 4.5, the  $t_{m,opt}$  asymptotically reduces from  $18\%c$  to smaller value of  $12\%c$  (see Fig. 3).

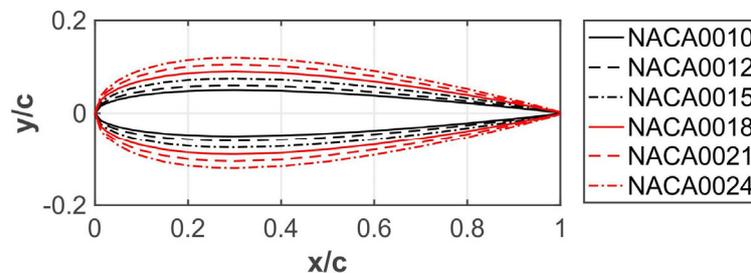


Figure 1. Profiles of the studied airfoils.

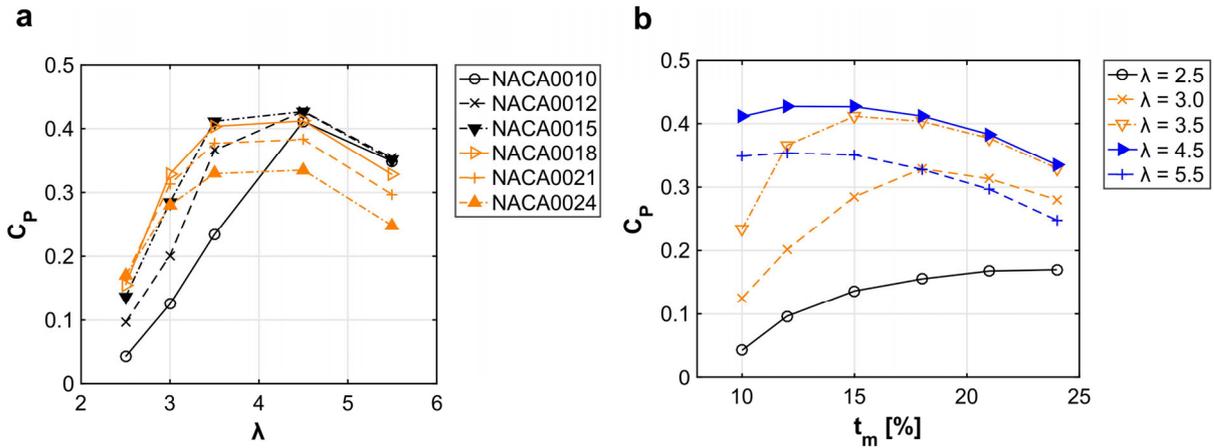


Figure 2. Power coefficient for the last turbine revolution (a) versus tip speed ratio for airfoil with different maximum thickness, 10-24%; (b) versus airfoil maximum thickness for different tip speed ratios, 2.5-5.5.

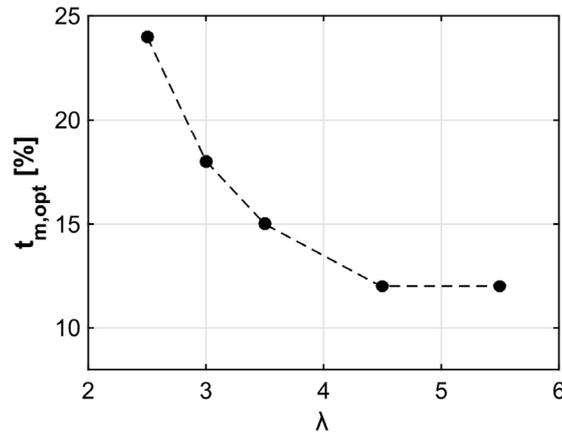


Figure 3. Optimal airfoil maximum thickness versus tip speed ratio.

Turbine instantaneous moment coefficient  $C_m$  during the last revolution for turbines with different airfoils at is illustrated in Fig. 4 for different values of  $\lambda$ . It can be seen that the higher  $C_p$  corresponding to thicker airfoils at low  $\lambda$  ( $< 3.5$ ) could be mainly associated to their higher stall angle. This is inferred from later drop of  $C_m$  for thicker airfoils within  $45^\circ \leq \theta \leq 90^\circ$ . In addition, the softer stall behavior of these airfoils also is influential on variation of  $C_m$  within the aforementioned  $\theta$ : the thinner airfoils go through a sudden drop in  $C_m$  while this drop is more gradual for thicker airfoils. The better performance of thinner airfoils at  $\lambda > 3.5$  is mostly attributed to their higher  $C_l/C_d$  prior to stall. Note that  $\lambda > 3.5$  corresponds to smaller variations of angle of attack on blades, which means that the blades mostly operate prior to stall and the flow is mostly attached.

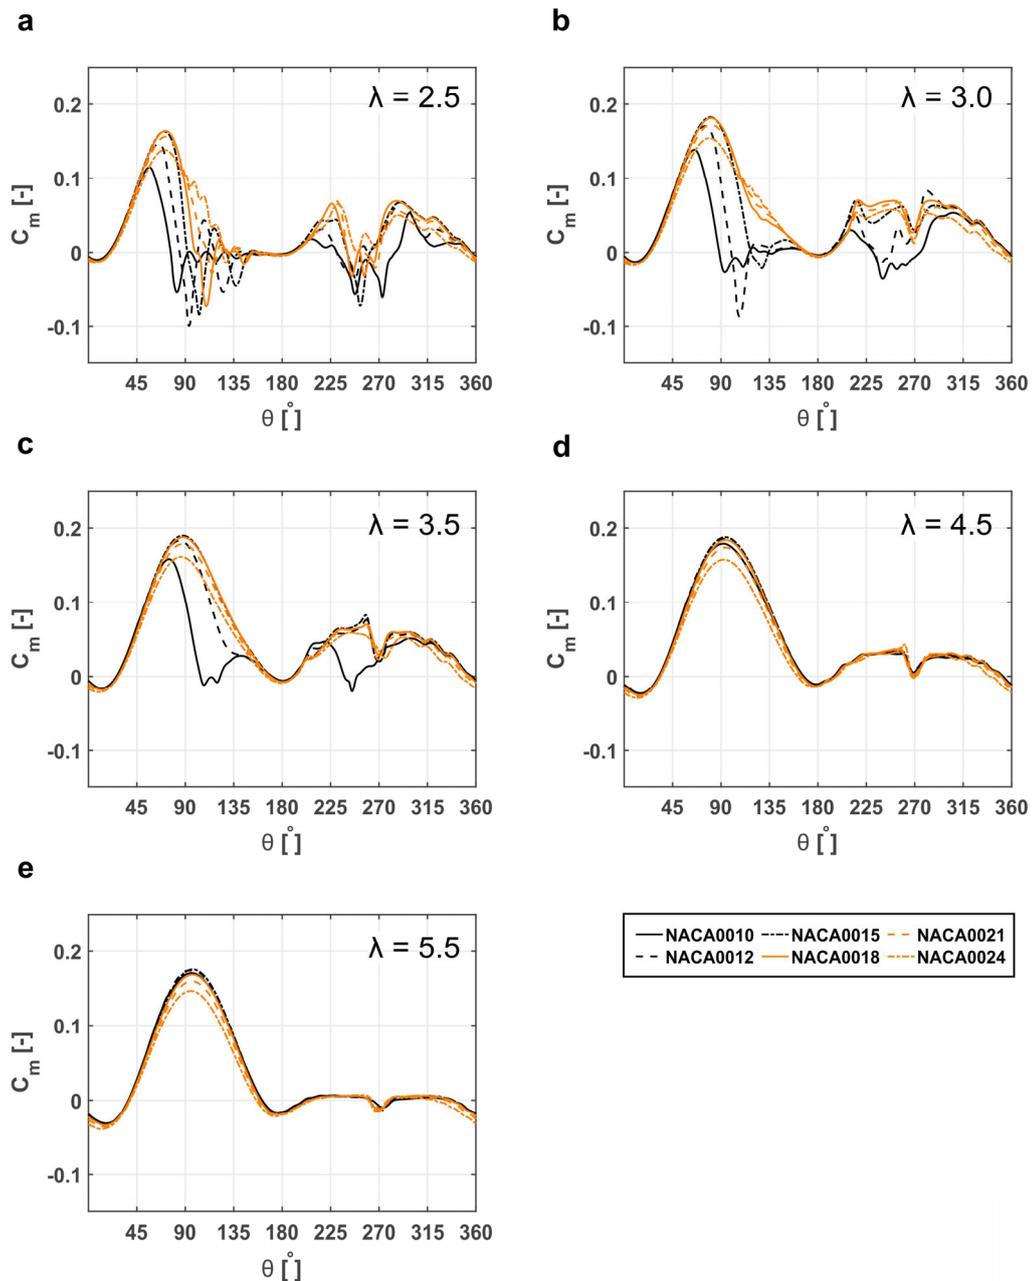


Figure 4. Instantaneous moment coefficient (during the last turbine revolution) at different tip speed ratios for airfoils with different maximum thickness, 10-24%.

#### 4. Acknowledgement

The authors would like to acknowledge support from the European Commission's Framework Program Horizon 2020, through the Marie Curie Innovative Training Network (ITN) AEOLUS4FUTURE - Efficient harvesting of the wind energy (H2020-MSCA-ITN-2014: Grant agreement no. 643167) and the TU1304 COST ACTION "WINERCOST". The authors gratefully acknowledge the partnership with ANSYS CFD. This work was sponsored by NWO Exacte Wetenschappen (Physical Sciences) for the use of supercomputer facilities, with financial support from the Nederlandse Organisatie voor Wetenschappelijk Onderzoek (Netherlands Organization for Scientific Research, NWO). The 2<sup>nd</sup> author, Hamid Montazeri, is currently a postdoctoral fellow of the Research Foundation – Flanders (FWO) and is grateful for its financial support (project FWO 12M5316N).

#### 5. Conclusions

CFD simulations are performed to systematically investigate the effect of airfoil maximum thickness on aerodynamic performance of VAWTs at different tip speed ratios. The results reveal that the optimum  $t_m$  asymptotically decreases from 24% $c$  at  $\lambda = 2.5$  to 12% $c$  at  $\lambda = 5.5$ . The better performance of thicker airfoils at small  $\lambda$  could be a result of their higher stall angle and soft stall behavior while higher  $C_l/C_d$  of thinner prior to stall explains their improved  $C_p$  at higher  $\lambda$ . The Weibull distribution of wind speed at potential installation locations, e.g. urban or sub-urban areas, can be employed to identify the most dominant wind speed regime and the corresponding  $\lambda$  so that the airfoil that yields the highest annual energy power (AEP) can be selected. To fully characterize the influence of airfoil shape on the aerodynamic performance of VAWTs, our future studies will investigate the effect of other important parameters defining the shape of the airfoil such as position of maximum thickness, leading edge radius, maximum camber and position of maximum camber.

## References

- [1] Bedon G, Schmidt Paulsen U, Aagaard Madsen H, Belloni F, Raciti Castelli M, and Benini E, "Computational assessment of the DeepWind aerodynamic performance with different blade and airfoil configurations," *Applied Energy*, vol. 185 (2), pp. 1100-1108, 2017.
- [2] Li QS, Shu ZR, and Chen FB, "Performance assessment of tall building-integrated wind turbines for power generation," *Applied Energy*, vol. 165, pp. 777-788, 2016.
- [3] Ferreira C, van Kuik G, van Bussel G, and Scarano F, "Visualization by PIV of dynamic stall on a vertical axis wind turbine," *Experiments in Fluids*, vol. 46 (1), pp. 97-108, 2009.
- [4] Parker CM and Leftwich MC, "The effect of tip speed ratio on a vertical axis wind turbine at high Reynolds numbers," *Experiments in Fluids*, vol. 57 (5), 2016.
- [5] Rezaeiha A, Montazeri H, and Blocken B, "Characterization of aerodynamic performance of vertical axis wind turbines: impact of operational parameters," *Energy Conversion and Management*, vol. 169 (C), pp. 45-77, 2018.
- [6] Li Q, Maeda T, Kamada Y, Murata J, Shimizu K, Ogasawara T, Nakai A, and Kasuya T, "Effect of solidity on aerodynamic forces around straight-bladed vertical axis wind turbine by wind tunnel experiments (depending on number of blades)," *Renewable Energy*, vol. 96, pp. 928-939, 2016.
- [7] Rezaeiha A, Montazeri H, and Blocken B, "Towards optimal aerodynamic design of vertical axis wind turbines: Impact of solidity and number of blades," *Energy*, vol. 165 (B), pp. 1129-1148, 2018.
- [8] Li Qa, Maeda T, Kamada Y, Murata J, Furukawa K, and Yamamoto M, "Effect of number of blades on aerodynamic forces on a straight-bladed Vertical Axis Wind Turbine," *Energy*, vol. 90, pp. 784-795, 2015.
- [9] Rezaeiha A, Kalkman I, and Blocken B, "Effect of pitch angle on power performance and aerodynamics of a vertical axis wind turbine," *Applied Energy*, vol. 197, pp. 132-150, 2017.
- [10] Rezaeiha A, Kalkman I, Montazeri H, and Blocken B, "Effect of the shaft on the aerodynamic performance of urban vertical axis wind turbines," *Energy Conversion and Management*, vol. 149 (C), pp. 616-630, 2017.
- [11] Singh MA, Biswas A, and Misra RD, "Investigation of self-starting and high rotor solidity on the performance of a three S1210 blade H-type Darrieus rotor," *Renewable Energy*, vol. 76, pp. 381-387, 2015.
- [12] Asr MT, Nezhad EZ, Mustapha F, and Wiriadidjaja S, "Study on start-up characteristics of H-Darrieus vertical axis wind turbines comprising NACA 4-digit series blade airfoils," *Energy*, vol. 112, pp. 528-537, 2016.
- [13] Mohamed MH, "Performance investigation of H-rotor Darrieus turbine with new airfoil shapes," *Energy*, vol. 47 (1), pp. 522-530, 2012.
- [14] Elkhoury M, Kiwata T, and Aoun E, "Experimental and numerical investigation of a three-dimensional vertical-axis wind turbine with variable-pitch," *Journal of Wind Engineering and Industrial Aerodynamics*, vol. 139, pp. 111-123, 2015.
- [15] Rezaeiha A, Kalkman I, and Blocken B, "CFD simulation of a vertical axis wind turbine operating at a moderate tip speed ratio: guidelines for minimum domain size and azimuthal increment," *Renewable Energy*, vol. 107, pp. 373-385, 2017.
- [16] Rezaeiha A, Montazeri H, and Blocken B, "Towards accurate CFD simulations of vertical axis wind turbines at different tip speed ratios and solidities: Guidelines for azimuthal increment, domain size and convergence," *Energy Conversion and Management*, vol. 156 (C), pp. 301-316, 2018.
- [17] Rezaeiha A, Montazeri H, and Blocken B, "On the accuracy of turbulence models for CFD simulations of vertical axis wind turbines," *Submitted*, 2018.