

Equations of motion of a control moment gyroscope

Citation for published version (APA):

Bloemers, T., & Toth, R. (2019). Equations of motion of a control moment gyroscope.

Document status and date:

Published: 03/05/2019

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

Equations of Motion of a Control Moment Gyroscope

Tom Bloemers, Roland Tóth

I. INTRODUCTION

In this document, a derivation of the dynamics describing the Quanser 3-DOF gyroscope is explained. First an overview of the system is presented and based on this, a set of generalized coordinate frames is defined. Through the Euler-Lagrange equations and the defined frames a dynamical model of the system is derived. Finally, a convenient way to compute the inertia and Coriolis matrices are presented.

For compactness and readability, sinusoidal functions are abbreviated as s_i and c_i , e.g., $\sin q_2 = s_2$ and $\cos^2 q_3 = c_3^2$. We refer the interested user to [1] for more information on modeling of multi-body systems.

II. DYNAMICS

The 3-DOF gyroscope consists of three gimbals (A , B and C) along with a symmetric disk (D) as shown in Figure 1. Right orientated sets of orthogonal unit vectors e_i^j with $i = x, y, z$ and $j = A, B, C, D, N$ are fixed to the natural (i.e., world) reference frame $j = N$ and the bodies (A , B , C and D) respectively. The origins of the coordinate frames are located in the centre of the disk (D).

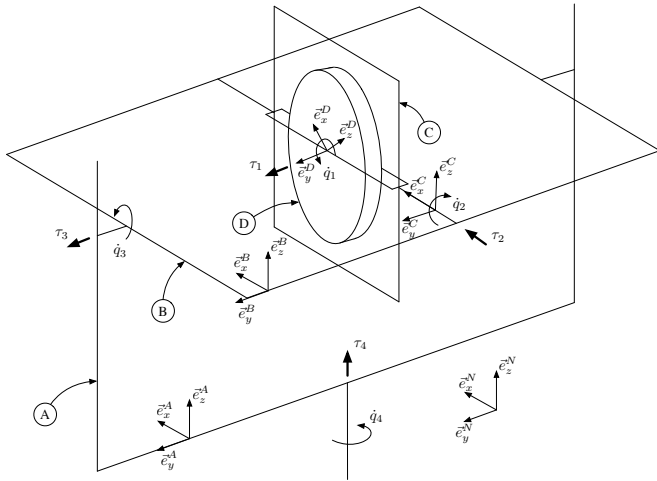


Fig. 1. Geometrical description of the 3DOF set-up. The torque directions are indicated by τ_i . To distinguish the coordinate frames, the unit vectors e_i^j have been drawn separately in different positions, but the origin of each frame is located in the center of D .

Define the generalized angular position vector $q \in \mathbb{R}^{n_q}$, the generalized angular velocity vector $\dot{q} \in \mathbb{R}^{n_q}$ and the

generalized angular acceleration vector $\ddot{q} \in \mathbb{R}^{n_q}$ as:

$$q := [q_1 \quad q_2 \quad q_3 \quad q_4]^\top, \quad (1a)$$

$$\dot{q} := [\dot{q}_1 \quad \dot{q}_2 \quad \dot{q}_3 \quad \dot{q}_4]^\top, \quad (1b)$$

$$\ddot{q} := [\ddot{q}_1 \quad \ddot{q}_2 \quad \ddot{q}_3 \quad \ddot{q}_4]^\top. \quad (1c)$$

Note that q_1 is connected to the disk D , q_2 to gimbal C , q_3 to gimbal B and q_4 to gimbal A . Define the input torque vector $\tau \in \mathbb{R}^{n_\tau}$ as

$$\tau := [\tau_1 \quad \tau_2 \quad \tau_3 \quad \tau_4]^\top, \quad (2)$$

where the torques τ_i ($i = 1, 2, 3$ and 4) can be exerted on the frames (D , C , B and A) respectively. The positive rotation direction of each frame is defined as

- q_1 : angle rotation around the e_y^D -axis w.r.t. frame C ,
- q_2 : angle rotation around the e_x^C -axis w.r.t. frame B ,
- q_3 : angle rotation around the e_y^B -axis w.r.t. frame A ,
- q_4 : angle rotation around the e_z^A -axis w.r.t. frame N .

Furthermore, let the frame orientation indicated in Figure 1 also indicate the initial position. For convenience, we define the body frame set \mathcal{S} :

$$\mathcal{S} := \{A, B, C, D\}. \quad (3)$$

The center of mass for all bodies comprising the system are assumed to be at the center of the disk (D). Thus, only rotational dynamics are considered and rectilinear dynamics and gravity effects are neglected. Additionally, friction forces of any kind are not considered in this manual (such modifications can be added by the user). The principal inertia tensors \mathcal{I}_k^k for frame k w.r.t. the same frame k , with $k \in \mathcal{S}$, are given as

$$\begin{aligned} \mathcal{I}_A^A &= \begin{bmatrix} I_A & 0 & 0 \\ 0 & J_A & 0 \\ 0 & 0 & K_A \end{bmatrix}, & \mathcal{I}_B^B &= \begin{bmatrix} I_B & 0 & 0 \\ 0 & J_B & 0 \\ 0 & 0 & K_B \end{bmatrix}, \\ \mathcal{I}_C^C &= \begin{bmatrix} I_C & 0 & 0 \\ 0 & J_C & 0 \\ 0 & 0 & K_C \end{bmatrix}, & \mathcal{I}_D^D &= \begin{bmatrix} I_D & 0 & 0 \\ 0 & J_D & 0 \\ 0 & 0 & I_D \end{bmatrix}, \end{aligned} \quad (4)$$

where the I_k, J_k, K_k ($k \in \mathcal{S}$) elements are the scalar moments of inertia about the i^{th} ($i = x, y, z$) axis respectively in the bodies \mathcal{S} . Note that the inertia tensor \mathcal{I}_D^D is simplified due to symmetry in the disk. The values of the inertia tensors are given in Appendix B.

Let the rotation matrices $R_j^i = [X_j^i \ Y_j^i \ Z_j^i]$ denote the coordinate transformation from inertial frame j to i , which can be constructed from the Cartesian rotation matrices:

$$R_X(q_j) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos q_j & -\sin q_j \\ 0 & \sin q_j & \cos q_j \end{bmatrix}, \quad (5a)$$

$$R_Y(q_j) = \begin{bmatrix} \cos q_j & 0 & \sin q_j \\ 0 & 1 & 0 \\ -\sin q_j & 0 & \cos q_j \end{bmatrix}, \quad (5b)$$

$$R_Z(q_j) = \begin{bmatrix} \cos q_j & -\sin q_j & 0 \\ \sin q_j & \cos q_j & 0 \\ 0 & 0 & 1 \end{bmatrix}, \quad (5c)$$

where

$$\begin{aligned} R_A^N &= R_Z(q_4), & R_B^A &= R_Y(q_3), \\ R_C^B &= R_X(q_2), & R_D^C &= R_Y(q_1). \end{aligned} \quad (6)$$

Utilizing these rotation matrices, one can for instance describe the frame rotation between the reference frame N and the disk frame D as

$$R_D^N = R_A^N R_B^A R_C^B R_D^C.$$

The rotation matrices (6) are utilized to relate the relative angular velocities to the generalized angular velocities as observed from frame N . For example, the relative velocity between frame A and B as observed from frame N is given as

$$\omega_{A,B}^N = R_A^N \vec{e}_y \dot{q}_3 = Y_A^N \dot{q}_3 \quad (7)$$

where Y_A^N is the unit vector in the y -direction of frame A observed from frame N . The relative velocity of each frame observed through frame N is equal to the sum of the relative angular velocities of the connected inertial frames.

$$\omega_{N,A}^N = [0 \ 0 \ 0 \ Z_N^N] \dot{q}, \quad (8a)$$

$$\omega_{N,B}^N = [0 \ 0 \ Y_A^N \ Z_N^N] \dot{q}, \quad (8b)$$

$$\omega_{N,C}^N = [0 \ X_B^N \ Y_A^N \ Z_N^N] \dot{q}, \quad (8c)$$

$$\omega_{N,D}^N = [Y_C^N \ X_B^N \ Y_A^N \ Z_N^N] \dot{q}, \quad (8d)$$

where

$$\begin{aligned} Z_N^N &= \vec{e}_z, & Y_A^N &= R_A^N \vec{e}_y, \\ X_B^N &= R_B^N \vec{e}_x, & Y_C^N &= R_C^N \vec{e}_y. \end{aligned} \quad (9)$$

The angular velocities (8) are written in the form $\omega_{N,k}^N = J_{N,k}^N \dot{q}$, where $J_{N,k}^N$ is the Jacobian that relates the angular velocities $\omega_{N,k}^N$ to the generalized angular velocities \dot{q} . Observe that the Jacobian is a function of the generalized angular positions, e.g., $J_{N,k}^N(q)$.

The kinetic energy of the system can be described as the sum of the kinetic energies of each body comprising the system. Utilizing the principal inertia tensors, rotation matrices and the Jacobians, the kinetic energy is

$$T(q, \dot{q}) = \frac{1}{2} \sum_{k \in \mathcal{S}} \dot{q}^\top \left[(J_{N,k}^N)^\top R_k^N \mathcal{I}_k^k (R_k^N)^\top J_{N,k}^N \right] \dot{q}. \quad (10)$$

As it is assumed that gravity effects are neglected and friction is not taken into account, there is no potential energy.

Consequently, the Lagrangian is equal to the kinetic energy (10)

$$L(q, \dot{q}) = T(q, \dot{q}). \quad (11)$$

The equations of motion in the generalized coordinates q are derived using the Euler-Lagrange equations

$$\frac{d}{dt} \frac{\partial L(q, \dot{q})}{\partial \dot{q}_i} - \frac{\partial L(q, \dot{q})}{\partial q_i} = \tau_i \quad i = 1, \dots, n_q \quad (12)$$

and can be written as a set of second order differential equations

$$\sum_{j=1}^{n_q} M_{ij}(q) \ddot{q}_j + \sum_{j=1}^{n_q} \sum_{k=1}^{n_q} \Gamma_{ijk} \dot{q}_j \dot{q}_k = \tau_i \quad i = 1, \dots, n_q \quad (13)$$

or equivalently

$$\sum_{j=1}^{n_q} M_{ij}(q) \ddot{q}_j + \sum_{j=1}^{n_q} C_{ij}(q, \dot{q}) \dot{q}_j = \tau_i \quad i = 1, \dots, n_q. \quad (14)$$

Here $M_{ij}(q)$ denotes the i^{th} and j^{th} row and column index of $M(q)$ respectively. The inertia matrix $M(q)$ can be computed as

$$M(q) = \sum_{k \in \mathcal{S}} (J_{N,k}^N)^\top R_k^N \mathcal{I}_k^k (R_k^N)^\top J_{N,k}^N. \quad (15)$$

The elements of the Coriolis matrix $C(q, \dot{q})$ are the result of the summation of the Christoffel symbols and the generalized angular velocities

$$C_{ij}(q, \dot{q}) = \sum_{k=1}^{n_q} \Gamma_{ijk} \dot{q}_k, \quad i, j = 1, \dots, n_q \quad (16)$$

where the Christoffel symbols Γ_{ijk} corresponding to the inertia matrix $M(q)$ can be chosen as

$$\Gamma_{ijk} = \frac{1}{2} \left(\frac{\partial M_{ij}(q)}{\partial q_k} + \frac{\partial M_{ik}(q)}{\partial q_j} - \frac{\partial M_{kj}(q)}{\partial q_i} \right) \quad (17)$$

It is interesting to note that

- $\Gamma_{ijk} = \Gamma_{ikj}$.
- Terms of the form $\dot{q}_i \dot{q}_j$, $i \neq j$ are the Coriolis forces and terms of the form $\dot{q}_i \dot{q}_j$, $i = j$ are the Centrifugal forces.
- There are other ways to define the matrix $C(q, \dot{q})$ such that $C_{ij}(q, \dot{q}) \dot{q}_j = \Gamma_{ijk} \dot{q}_j \dot{q}_k$.
- Rewriting the equations (14) into a vectorized form gives the well-known result:

$$M(q) \ddot{q} + C(q, \dot{q}) \dot{q} = \tau. \quad (18)$$

The inertia matrix $M(q)$ and the Christoffel symbols Γ_{ijk} for the Coriolis matrix $C(q, \dot{q})$ can be found in Appendix A.

APPENDIX A INERTIA AND CORIOLIS MATRICES

The inertia matrix $M(q)$ is given as the summation of the inertia matrices for each frame in \mathcal{S} :

$$M(q) = \sum_{k \in \mathcal{S}} M_k(q) \quad (19)$$

$$\begin{aligned}
M_A &= \begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & K_A \end{bmatrix} \\
M_B &= \begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & J_B & 0 \\ 0 & 0 & 0 & I_B s_3^2 + K_B c_3^2 \end{bmatrix} \\
M_C &= \begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & I_C & 0 & -I_C s_3 \\ 0 & 0 & J_C c_2^2 + K_C s_2^2 & \alpha_1 s_2 c_2 c_3 \\ 0 & -I_C s_3 & \alpha_1 s_2 c_2 c_3 & I_C s_3^2 + (J_C s_2^2 + K_C c_2^2) c_3^2 \end{bmatrix} \\
M_D &= \begin{bmatrix} J_D & 0 & J_D c_2 & J_D s_2 c_3 \\ 0 & I_D & 0 & -I_D s_3 \\ J_D c_2 & 0 & I_D s_2^2 + J_D c_2^2 & \alpha_2 s_2 c_2 c_3 \\ J_D s_2 c_3 & -I_D s_3 & \alpha_2 s_2 c_2 c_3 & I_D s_3^2 + (I_D c_2^2 + J_D s_2^2) c_3^2 \end{bmatrix}
\end{aligned}$$

The elements of the Coriolis matrix $C(q, \dot{q})$ can be computed as the summation of the Christoffel symbols and the generalized angular velocities as in (16). The Christoffel symbols Γ_{ijk} are collected in matrices for varying i , these matrices are denoted as Γ^i . For example, the Christoffel symbol $\Gamma_{4,3,2}$ can be found in the 4th matrix Γ^4 with row index number $j = 3$ and column index number $k = 2$, i.e., $\Gamma_{3,2}^4 = \alpha_3(c_3 s_2^2 - c_2^2 c_3) - \alpha_4 c_3$.

$$\begin{aligned}
\Gamma^1 &= \frac{1}{2} \begin{bmatrix} 0 & 0 & 0 & 0 \\ * & 0 & -J_D s_2 & J_D c_2 c_3 \\ * & * & 0 & -J_D s_2 s_3 \\ * & * & * & 0 \end{bmatrix} \\
\Gamma^2 &= \frac{1}{2} \begin{bmatrix} 0 & 0 & J_D s_2 & -J_D c_2 c_3 \\ * & 0 & 0 & 0 \\ * & * & -2\alpha_3 s_2 c_2 & \alpha_3(c_2^2 c_3 - s_2^2 c_3) - \alpha_4 c_3 \\ * & * & * & \alpha_3 c_2 c_3^2 s_2 \end{bmatrix} \\
\Gamma^3 &= \frac{1}{2} \begin{bmatrix} 0 & -J_D s_2 & 0 & J_D s_2 s_3 \\ * & 0 & 2\alpha_3 s_2 c_2 & \alpha_4 c_3 + \alpha_3(c_3 s_2^2 - c_2^2 c_3) \\ * & * & 0 & 0 \\ * & * & * & -(\alpha_5 + \alpha_3 s_2^2) c_3 s_3 \end{bmatrix} \\
\Gamma^4 &= \frac{1}{2} \begin{bmatrix} 0 & J_D c_2 c_3 & -J_D s_2 s_3 & 0 \\ * & 0 & \alpha_3(c_3 s_2^2 - c_2^2 c_3) - \alpha_4 c_3 & -\alpha_3 c_2 c_3^2 s_2 \\ * & * & \alpha_3 c_2 s_2 s_3 & (\alpha_5 + \alpha_3 s_2^2) c_3 s_3 \\ * & * & * & 0 \end{bmatrix}
\end{aligned}$$

using the property that $\Gamma_{ijk} = \Gamma_{ikj}$, the $*$ symbol denotes terms required to make the matrix symmetric (i.e., they correspond to the transpose of their upper triangular pair). The variables α_i are defined as:

$$\begin{aligned}
\alpha_1 &:= J_C - K_C \\
\alpha_2 &:= J_D - I_D \\
\alpha_3 &:= I_D - J_C - J_D + K_C \\
\alpha_4 &:= I_C + I_D \\
\alpha_5 &:= I_B + I_C - K_B - K_C.
\end{aligned}$$

Vectorizing the computation of (16) gives:

$$C(q, \dot{q}) = \begin{bmatrix} \dot{q}^\top & 0 & 0 & 0 \\ 0 & \dot{q}^\top & 0 & 0 \\ 0 & 0 & \dot{q}^\top & 0 \\ 0 & 0 & 0 & \dot{q}^\top \end{bmatrix} \begin{bmatrix} \Gamma^1 \\ \Gamma^2 \\ \Gamma^3 \\ \Gamma^4 \end{bmatrix}.$$

APPENDIX B INERTIA TENSORS

The values of the inertia tensors as defined in (4) are given as:

$$\begin{aligned}
\mathcal{I}_A^A &= \begin{bmatrix} 0.0902 & 0 & 0 \\ 0 & 0.0534 & 0 \\ 0 & 0 & 0.0375 \end{bmatrix}, \\
\mathcal{I}_B^B &= \begin{bmatrix} 0.0037 & 0 & 0 \\ 0 & 0.0179 & 0 \\ 0 & 0 & 0.0213 \end{bmatrix}, \\
\mathcal{I}_C^C &= \begin{bmatrix} 0.0010 & 0 & 0 \\ 0 & 0.0018 & 0 \\ 0 & 0 & 0.0027 \end{bmatrix}, \\
\mathcal{I}_D^D &= \begin{bmatrix} 0.0028 & 0 & 0 \\ 0 & 0.0056 & 0 \\ 0 & 0 & 0.0028 \end{bmatrix}.
\end{aligned}$$

These values are taken from the 3D drawings (see [2]) and should be experimentally verified and adjusted by the user if needed.

REFERENCES

- [1] R.M. Murray, Z. Li, and S.S Sastry, "A mathematical introduction to robotic manipulation," 1994.
- [2] Quanser, "Quanser - mass moment of inertia," Tech. Rep.