

## Strain rate dependent toughness of rubber modified brittle amorphous polymers

**Citation for published version (APA):**

Jansen, B. J. P., Rastogi, S., Meijer, H. E. H., & Lemstra, P. J. (1997). *Strain rate dependent toughness of rubber modified brittle amorphous polymers*. Poster session presented at Mate Poster Award 1997 : 2nd Annual Poster Contest.

**Document status and date:**

Published: 01/01/1997

**Document Version:**

Accepted manuscript including changes made at the peer-review stage

**Please check the document version of this publication:**

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

**General rights**

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

[www.tue.nl/taverne](http://www.tue.nl/taverne)

**Take down policy**

If you believe that this document breaches copyright please contact us at:

[openaccess@tue.nl](mailto:openaccess@tue.nl)

providing details and we will investigate your claim.

# Strain Rate Dependent Toughness of Rubber Modified Brittle Amorphous Polymers

B.J.P. Jansen, S. Rastogi, H.E.H. Meijer and P.J. Lemstra

Eindhoven University of Technology,  
Department of Chemical Engineering,  
P.O. Box 513, NL 5600 MB Eindhoven



## Introduction

Objective is to study the relation between the toughness and the microscopic mode of deformation in rubber modified brittle amorphous polymers at different strain rates. Therefore:

- PMMA/rubber blends with sub-micron sized morphologies are prepared via chemically induced phase separation.
- The microscopic deformation is studied using small angle x-ray scattering (SAXS).
- The toughness is determined for both tensile and impact deformation.

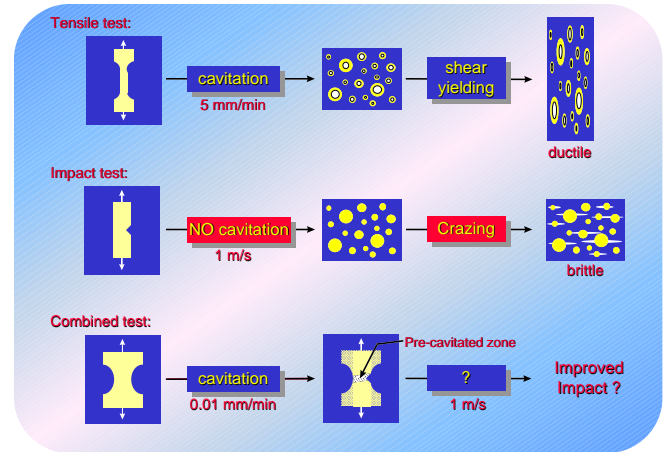


fig. 3 Overview of the mechanical tests and the mode of microscopic deformation determined by SAXS.

## Results

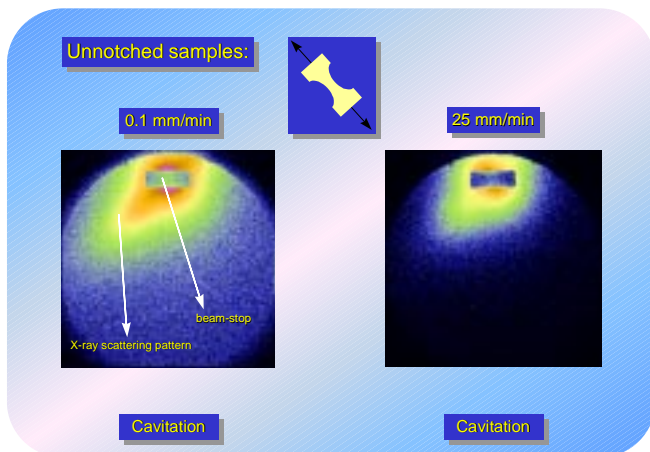


fig. 1 SAXS patterns of PMMA/rubber 80/20 blend showing cavitation for both strain rates.

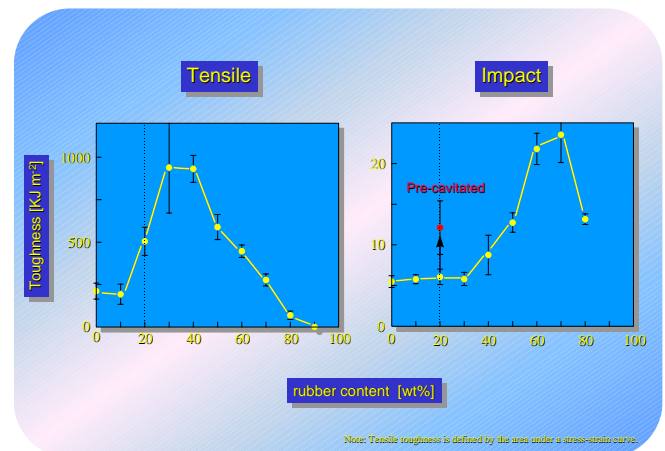


fig. 4 Macroscopic mechanical properties of the PMMA blends. The impact toughness of the 80/20 blend is enhanced by pre-cavitation of the impact sample in tensile deformation (combined test, see fig. 3).

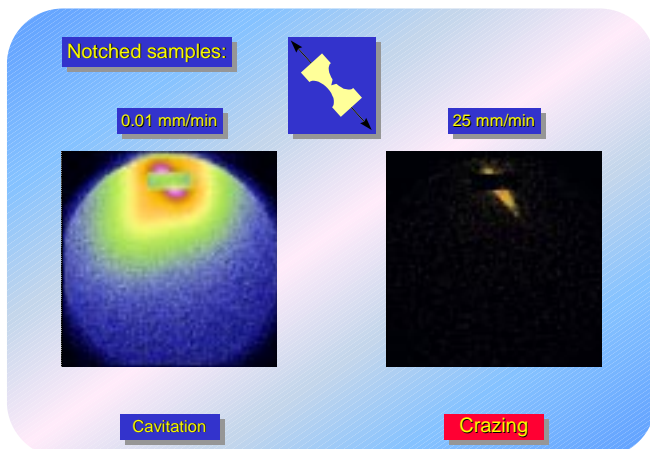


fig. 2 SAXS patterns of PMMA/rubber 80/20 blend showing a transition in microscopic deformation mechanism from cavitation to crazing with increasing strain rate.

## Conclusions

- The PMMA/rubber 80/20 blend shows an improved tensile toughness but is still brittle in impact.
- This can be explained by the transition from cavitation to crazing at higher strain rates.
- The impact toughness can be improved in a combined test in which 'holes' are generated in tensile deformation prior to the impact test.