

String stability of vehicle platoons

Citation for published version (APA):

Ploeg, J., Wouw, van de, N., & Nijmeijer, H. (2011). String stability of vehicle platoons. In *Book of Abstracts of the 30th Benelux Meeting on Systems and Control, March 15-17, 2011, Lommel, Belgium* Universiteit Gent.

Document status and date:

Published: 01/01/2011

Document Version:

Accepted manuscript including changes made at the peer-review stage

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

String Stability of Vehicle Platoons

Jeroen Ploeg
 TNO, Business Unit Automotive
 P.O. Box 756, 5700 AT Helmond, The Netherlands
 Email: jeroen.ploeg@tno.nl

Nathan van de Wouw, Henk Nijmeijer
 Mechanical Engineering Department
 Eindhoven University of Technology
 Eindhoven, The Netherlands

1 Introduction

In recent years, highway capacity has become a limiting factor, regularly causing traffic jams. Obviously, the road capacity can be increased by decreasing the inter-vehicle following distance d_i . As a consequence, however, vehicle automation in longitudinal direction is required in order to still guarantee safety. To this end, Adaptive Cruise Control could be used, which is based on measurement of the inter-vehicle distance and the relative velocity by means of radar. It has however been shown [1] that this will amplify disturbances in upstream direction at short time gaps, causing so-called ghost traffic jams. Application of data exchange by means of wireless communication in addition, is shown to be able to attenuate these disturbances. This is called Cooperative Adaptive Cruise Control (CACC), illustrated in Figure 1 for a one-vehicle look-ahead communication structure.

2 Problem statement

An important control design objective for automated vehicle platoons is, therefore, the ability to attenuate perturbations introduced by an arbitrary vehicle in the platoon along the string in upstream direction. The notion of string stability refers to this requirement. As opposed to system stability, which is concerned with the evolution of system states over time, string stability focuses on the propagation of states over interconnected subsystems. Surprisingly, a uniform definition of string stability does not exist. It is the objective of this research to formalize the notion of string stability, forming a solid basis for CACC control design.

3 String Stability approach

Lyapunov-like approaches for string stability exist [2], but also performance-oriented interpretations are used [1]. An example of string unstable behavior is illustrated in the left part of Figure 2, showing the response of the velocity $v_i(t)$

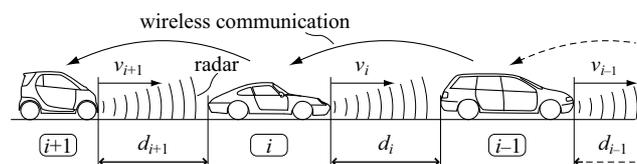


Figure 1: Schematic representation of a vehicle platoon.

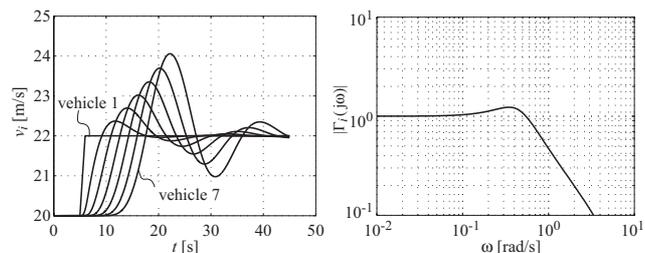


Figure 2: Time-domain response (left) and frequency-domain response (right) of a string-unstable vehicle platoon.

of six vehicles to a ramp of the lead vehicle velocity $v_1(t)$. In order to arrive at a rigorous definition, it is proposed to formulate string stability in terms of input-output stability, i.e., requiring a bounded norm of the output $y_i(t)$ of vehicle i , with $i \rightarrow \infty$, taking the input $u_1(t)$ of the lead vehicle as external input, where $y_i(t)$ and $u_1(t)$ are for instance the velocity of vehicle i and the desired velocity of the lead vehicle, respectively. If the system is linear, the complementary sensitivity $P_i(s)$ can be calculated such that $Y_i(s) = P_i(s)U_1(s)$. Assuming functional controllability, the *string stability complementary sensitivity* $\Gamma_i(s)$ can be defined for all i :

$$\Gamma_i(s) \equiv P_i(s)P_{i-1}^{-1}(s) \quad (1)$$

such that $Y_i(s) = \Gamma_i(s)Y_{i-1}(s)$. As an example, the right part of Figure 2 depicts $|\Gamma_i(j\omega)|$, with $\Gamma_i(j\omega)$ being a scalar transfer function independent of i , in this particular case. Consequently, input-output stability leads to conditions on the norm of $\Gamma_i(j\omega)$, or its impulse response $\gamma_i(t)$, which can be readily used for controller synthesis.

Future research focuses on control design for various communication structures, also taking into account the use of observers to accurately estimate the state of other vehicles.

References

- [1] G. J. L. Naus, R. Vugts, J. Ploeg, M. J. G. van de Molengraft, and M. Steinbuch. String-stable CACC design and experimental validation: A frequency-domain approach. *IEEE Trans. Veh. Technol.*, Vol. 59, No. 9, pp. 4268–4279, November 2010.
- [2] D. Swaroop and J. K. Hedrick. String stability of interconnected systems. *IEEE Trans. Autom. Control*, Vol. 41, No. 3, pp. 349–357, March 1996.