

Mechanical characterization of electrospun scaffolds for in situ tissue engineering

Citation for published version (APA):

Argento, G., Simonet, M., Oomens, C. W. J., & Baaijens, F. P. T. (2011). *Mechanical characterization of electrospun scaffolds for in situ tissue engineering*. Poster session presented at Mate Poster Award 2011 : 16th Annual Poster Contest.

Document status and date:

Published: 01/01/2011

Document Version:

Accepted manuscript including changes made at the peer-review stage

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy


If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

Mechanical characterization of electrospun scaffolds for in situ tissue engineering

G. Argento, M. Simonet, C.W.J. Oomens, F.P.T. Baaijens
Eindhoven University of Technology, Department of Biomedical Engineering

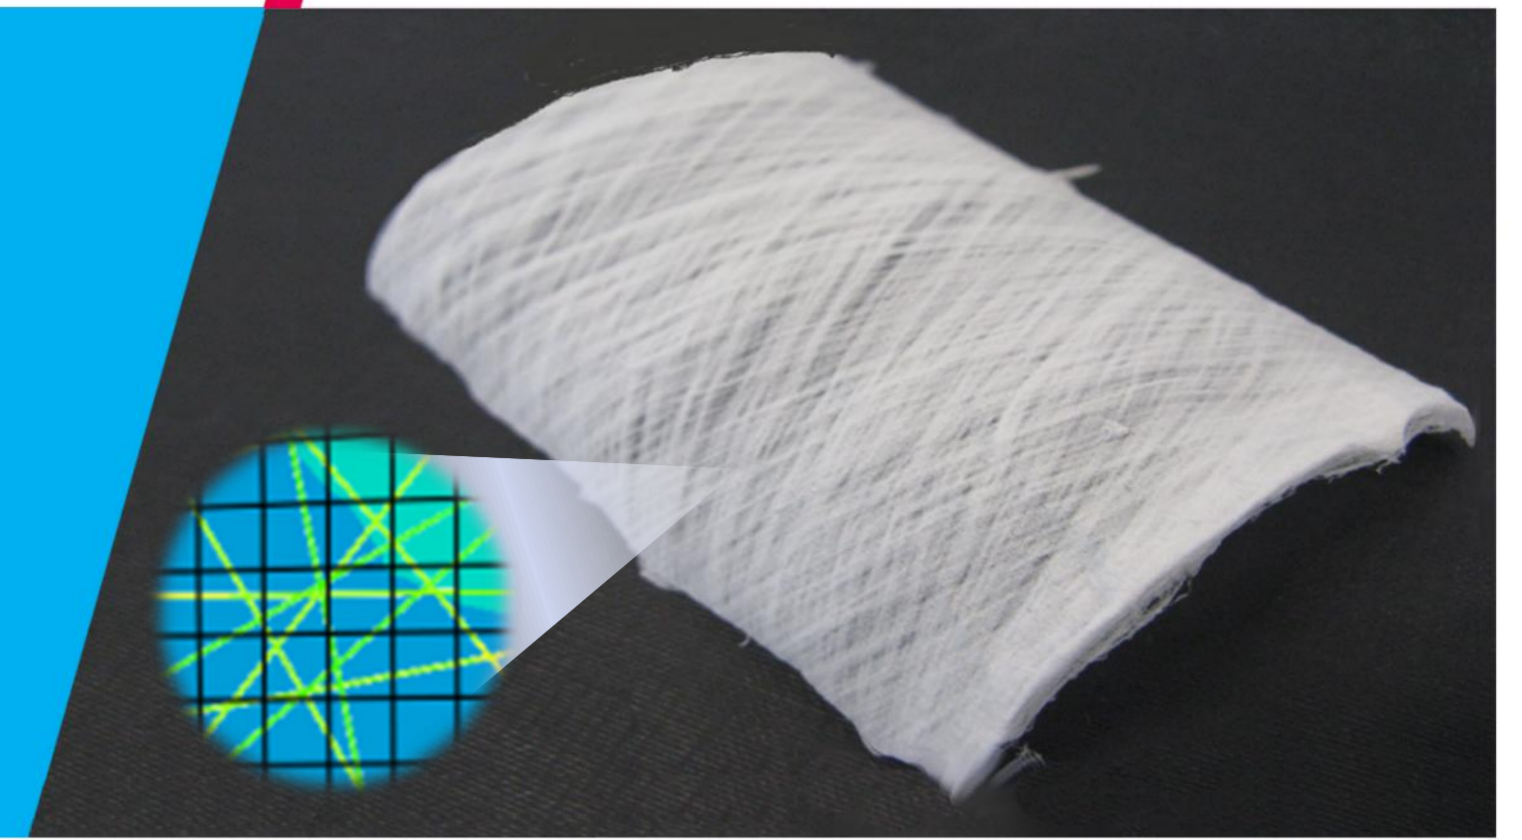

Introduction

In situ tissue engineering is an attractive alternative to the traditional tissue engineering approach [1] (Fig.1). It requires the design of an electrospun scaffold able to meet the hemodynamic demands when it is implanted.

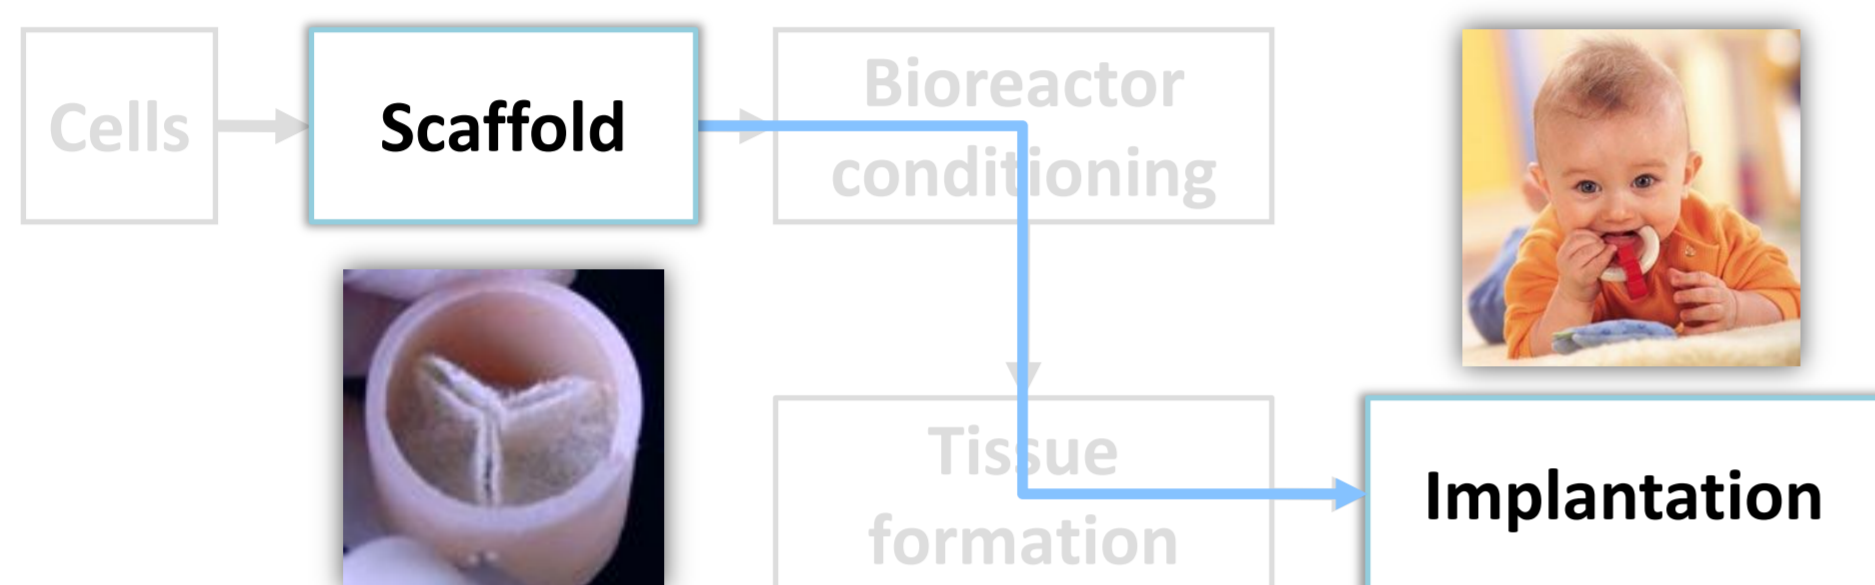


Figure 1: In situ tissue engineering approach

Aim of the work

Evaluate the mechanical properties of electrospun scaffolds with different microstructural properties.
Validate a computational framework aimed at optimizing the design of electrospun scaffolds for tissue engineering.

Materials and methods

Two electrospun scaffolds are produced, with different fiber orientation (Fig. 2). Scaffold samples are soaked in water and the macroscopical mechanical behavior of the scaffolds is evaluated by means of biaxial mechanical tests (Fig. 3).

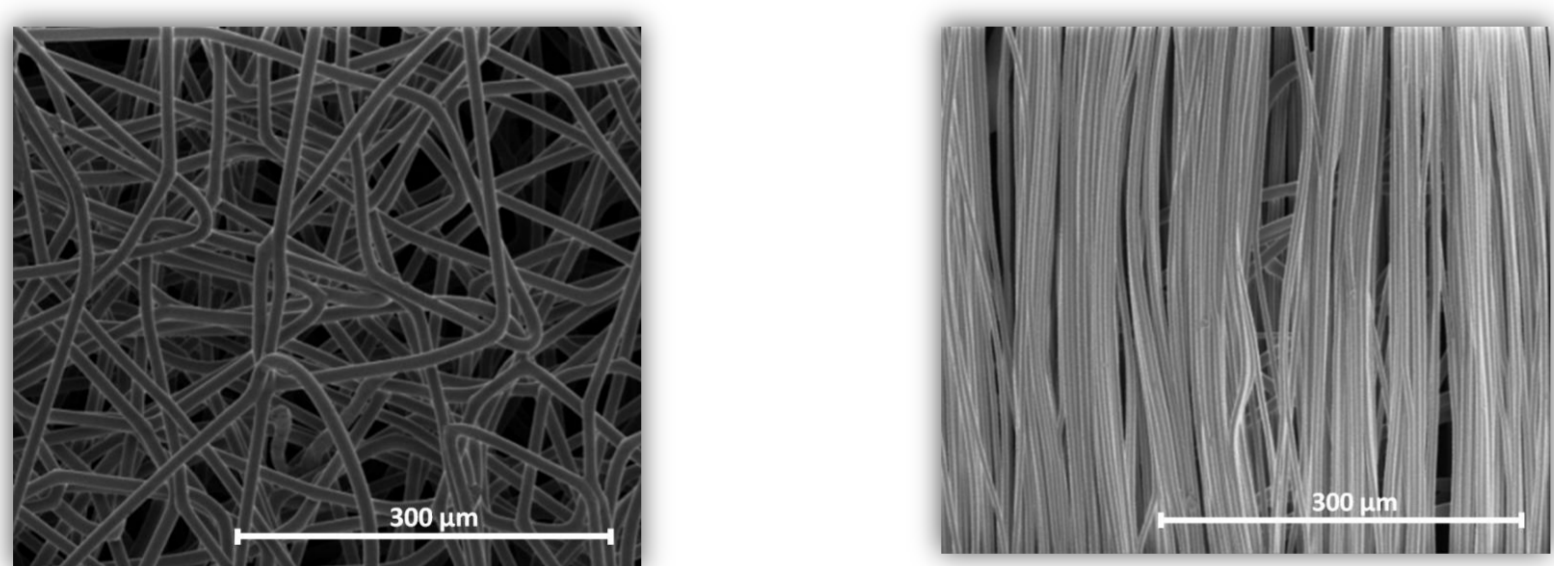


Figure 2: Electrospun scaffolds with isotropic fiber distribution (left) and scaffold with highly anisotropic fiber distribution (right).

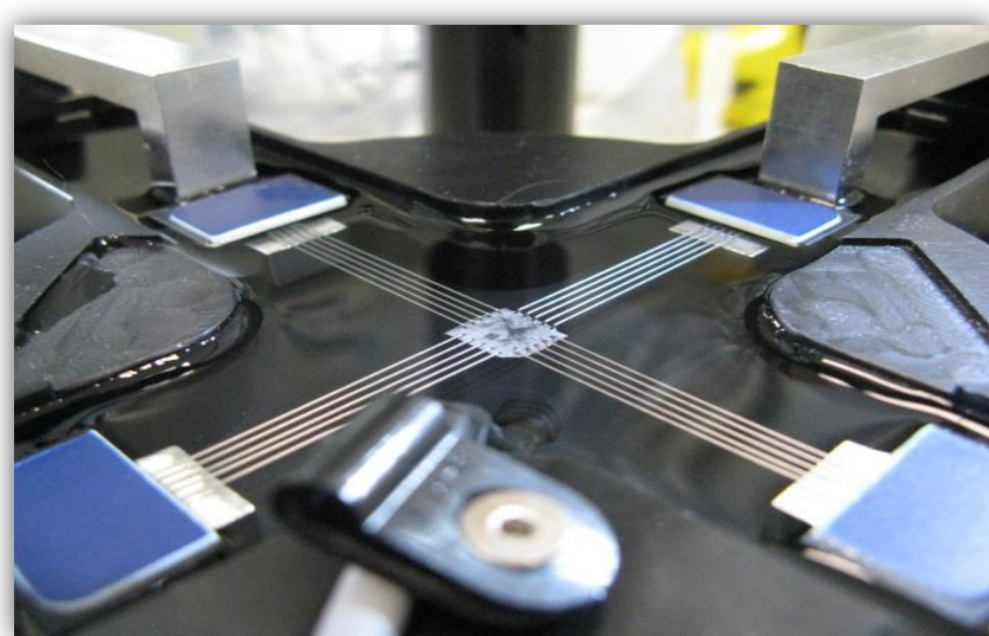


Figure 3: Biaxial tester used to test scaffold samples

The structural properties of the fibrous constructs (fiber diameter, fiber orientation, porosity, interconnection) are characterized and used to build a microstructural computational model of the scaffolds [2] (Fig. 4).

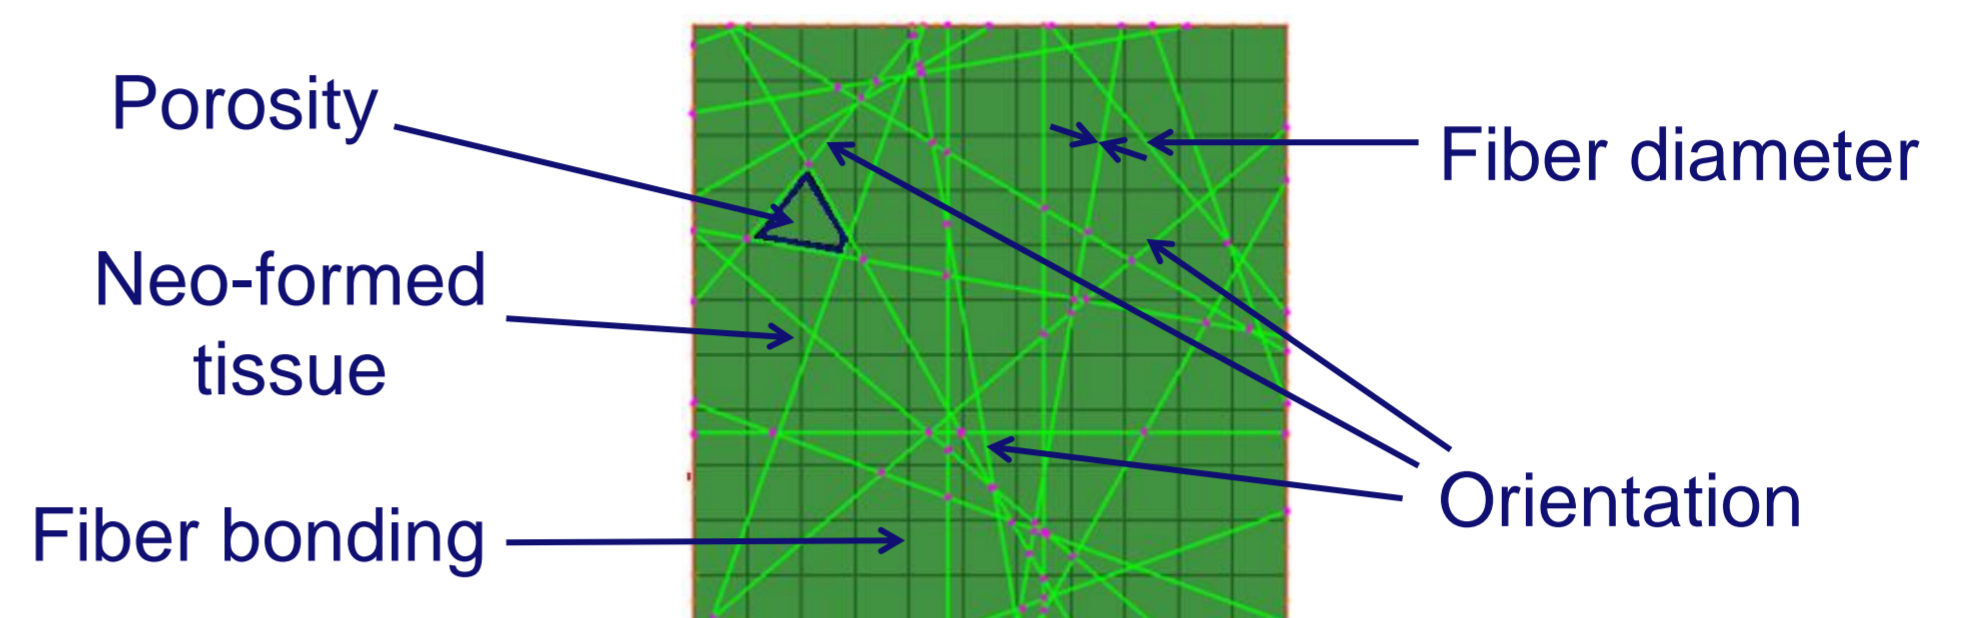


Figure 4: Microstructural model of an electrospun scaffold

The numerical framework is fully characterized with reference to the biaxial experimental results.

Results

The numerical model is suitable to describe the different mechanical behavior of electrospun scaffolds with different constitutive properties (Fig. 5).

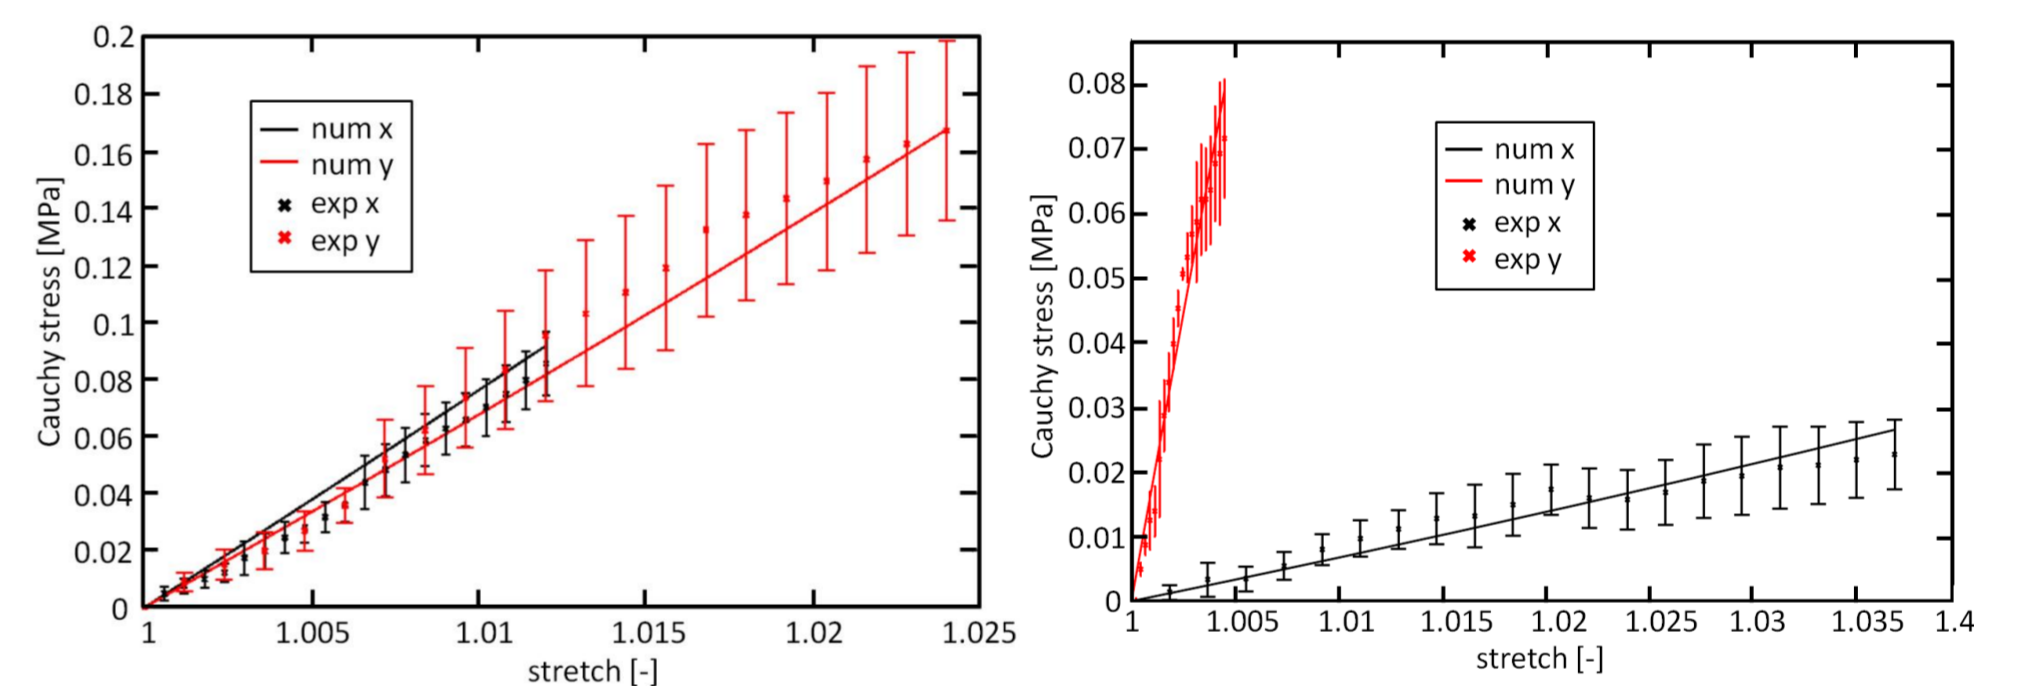


Figure 5: Numerical fitting of the experimental biaxial data for the scaffold with more isotropic (left) and the highly anisotropic (right) fiber distribution

The computational model is capable to predict the uniaxial mechanical behavior of a scaffold (Fig. 6).

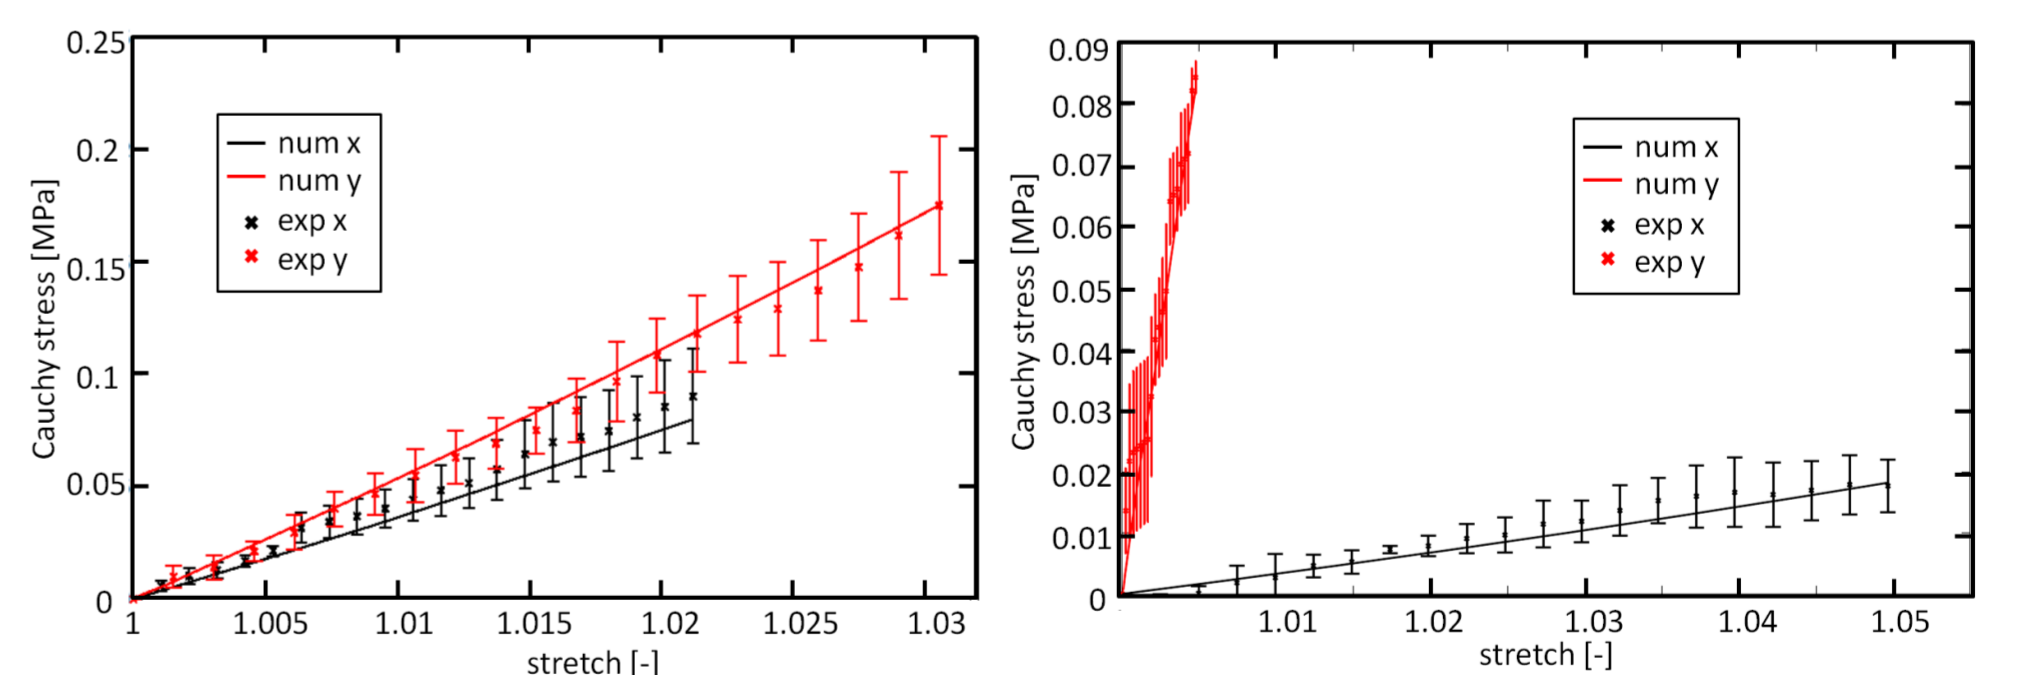


Figure 6: Predicted uniaxial mechanical behavior of the scaffold with more isotropic (left) and the highly anisotropic (right) fiber distribution

Future work

The computational prediction will be used to get information about the mechanical performance of valve shaped polymeric scaffolds.

References

- [1] Mol A, Driessen NJB, Rutten MCM, Hoerstrup SP, Bouten CVC, Baaijens FPT. Tissue Engineering of Human Heart Valve Leaflets: A Novel Bioreactor for a Strain-Based Conditioning Approach. *Ann Biomed Eng* 2005; 12(33):1778-1788.
- [2] Argento G, Oomens CWJ, Baaijens FPT. Optimal boundary conditions for the multi-scale finite element analysis of fibrous scaffolds for heart valve tissue engineering, *ASME Summer Bioengineering Conference* 2011