

# Computational homogenization for heat conduction in heterogeneous solids

***Citation for published version (APA):***

Ozdemir, I., Brekelmans, W. A. M., & Geers, M. G. D. (2006). *Computational homogenization for heat conduction in heterogeneous solids*. Poster session presented at Mate Poster Award 2006 : 11th Annual Poster Contest.

***Document status and date:***

Published: 01/01/2006

***Document Version:***

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

***Please check the document version of this publication:***

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

***General rights***

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

[www.tue.nl/taverne](http://www.tue.nl/taverne)

***Take down policy***

If you believe that this document breaches copyright please contact us at:

[openaccess@tue.nl](mailto:openaccess@tue.nl)

providing details and we will investigate your claim.

# Computational Homogenization for Heat Conduction in Heterogeneous Solids

I. Özdemir, W.A.M. Brekelmans and M.G.D. Geers  
 Eindhoven University of Technology, Department of Mechanical Engineering

## Introduction

Materials with a high temperature resistance are indispensable in many engineering applications. Furnace linings and thermal barrier coatings are just to name some examples where a structure is exposed to strong temperature changes and cycles.

## Objective

Under severe thermal conditions, the damage mechanism originates from the thermal expansion anisotropy, non-uniformity and/or mismatches between the constituents at the meso or micro level. Therefore an accurate prediction of the deterioration process and failure requires a comprehensive understanding of the temperature distribution at all relevant levels of observation. The objective is to construct a computational homogenization procedure which can be used for the heat conduction analysis in heterogeneous solids with complex microstructures including temperature and orientation dependent conductivities.

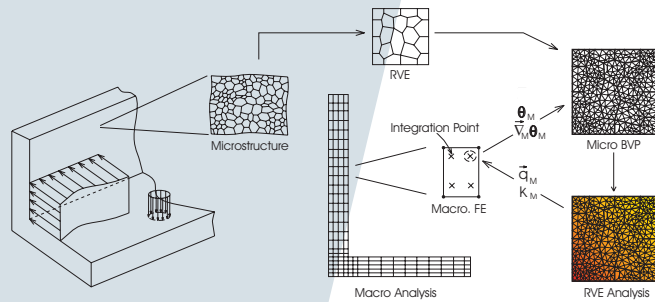


Figure 1 Schematic representation of the computational homogenization scheme

## Modeling

The basic idea is the derivation of the macroscopic material response from the underlying microstructure. In a finite element model this is realized by solving, at each integration point, a micro boundary value problem (BVP) which is excited by the macroscopic temperature  $\theta_M$ , and the temperature gradient  $\nabla_M \theta_M$ . Upon the solution, the macroscopic heat flux  $\vec{q}_M$  is obtained by a proper averaging relation and the macroscopic conductivity  $K_M$  by an extraction procedure from the microstructural conductivity (see figure 1). A nested finite element solution procedure is developed and implemented.

## Results and Discussion

The first illustrative problem is depicted in fig. 2. To investigate the effect of microstructural anisotropy, the principal conductivity directions of granular microstructure is tuned, eg. small-scatter for a strongly textured microstructure. Furthermore, the effect of pre-damage is investigated qualitatively with the aid of a cracked RVE. The resulting macro-

scopic temperature profiles including the rule of mixture solution are presented in fig. 2. The method delivers also the microstructural fields from which it is clearly seen that the pre-damage hinders the heat conduction and acts as a barrier for the heat flow at micro level (see figure 2).

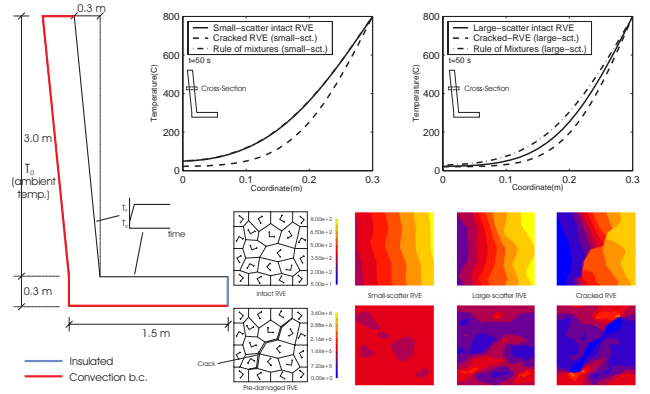


Figure 2 Macroscopic temperature profiles and the microscopic state (top row temperature, bottom row magnitude of heat flux) at the identical integration points

The temperature evolution through the thickness of a fire retardance unit made of closed cell aluminium foam, is also investigated. The temperature dependence of conductivity is taken into account and furthermore the rule of mixtures solution is also presented. Obviously, the temperature dependency in heat conduction yields some significant difference on the outer surface temperature of the wall which is the crucial information (see figure 3).

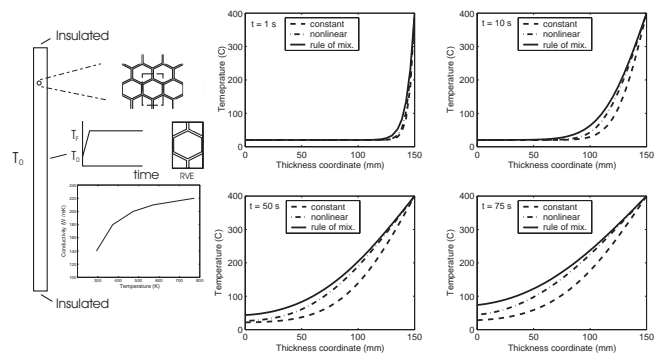


Figure 3 Temperature profile along the thickness at different times

## Future Work

The thermal homogenization will be combined with the mechanical homogenization [1] including cohesive elements to investigate the thermally induced interfacial damage.

## References:

[1] KOUZNETSOVA ET AL: An approach to micro-macro modeling of heterogeneous materials (Comp. Mech., 27, 37-48, 2001)