

Copper-rubber interface delamination in stretchable electronics

Citation for published version (APA):

Neggers, J., Hoefnagels, J. P. M., Timmermans, P. H. M., & Geers, M. G. D. (2010). Copper-rubber interface delamination in stretchable electronics. In F. Bremand (Ed.), *ICEM 14 – 14th International Conference on Experimental Mechanics* (pp. 42019-). (EPJ Web of Conferences; Vol. 6). EDP Sciences.
<https://doi.org/10.1051/epjconf/20100642019>

DOI:

[10.1051/epjconf/20100642019](https://doi.org/10.1051/epjconf/20100642019)

Document status and date:

Published: 01/01/2010

Document Version:

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

Copper-Rubber Interface Delamination in Stretchable Electronics

J. Neggers^{1,a}, J.P.M. Hoefnagels¹, P.H.M. Timmermans², and M.G.D. Geers¹

¹ Eindhoven University of Technology, Section Mechanics of Materials, P.O. Box 513, NL 5600 MB, The Netherlands

² Philips Applied Technologies, System in Package, High Tech Campus 7, 5656 AE Eindhoven, The Netherlands

Introduction

Interface delamination is a precursor to the failure of stretchable electronics mechanistic patterns of metal interconnects and elastically mismatched rubber matrix materials.

The goal of this project is to characterize interface delamination of the copper rubber interface by means of *in-situ* Environmental SEM analysis of the delamination front during 90° Peel tests.

Results

From an analysis of systems of the same rubber but different Cu roughnesses, it was found that interfacial integrity is not only governed by chemical bonding, but also by;

- Local interface area (due to roughness)
- Mode mixity of the loading
- Mechanical interlocking

From a ESEM analysis of the delaminated surface of the same Cu (roughness) but 2 types of TPU (TU-Berlin) and 1 PDMS (IMEC Ghent) rubber system it was found that: The amount of rubber left at the surface A_r after delamination remarkably increased with decreasing Work of Separation (Figure 1).

From *in-situ* observations of the realtime delamination tests it was found that: Interface delamination is a delicate balance between the forming, elongation and rupture of fibrils and interface delamination (Figure 2).

^a e-mail: j.neggers@tue.nl

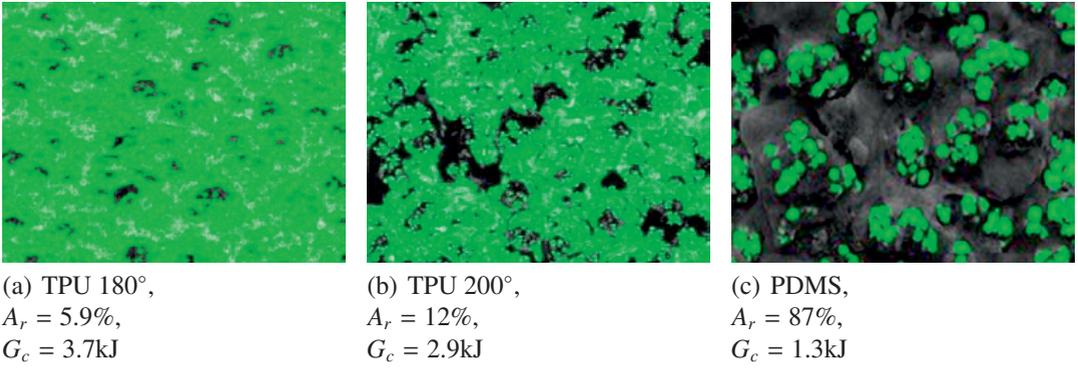


Fig. 1: Analysis of ESEM images of the copper surface after peeling, rubber is shown in black and copper in green. With A_r the rubber fraction and G_c the Work of Separation.

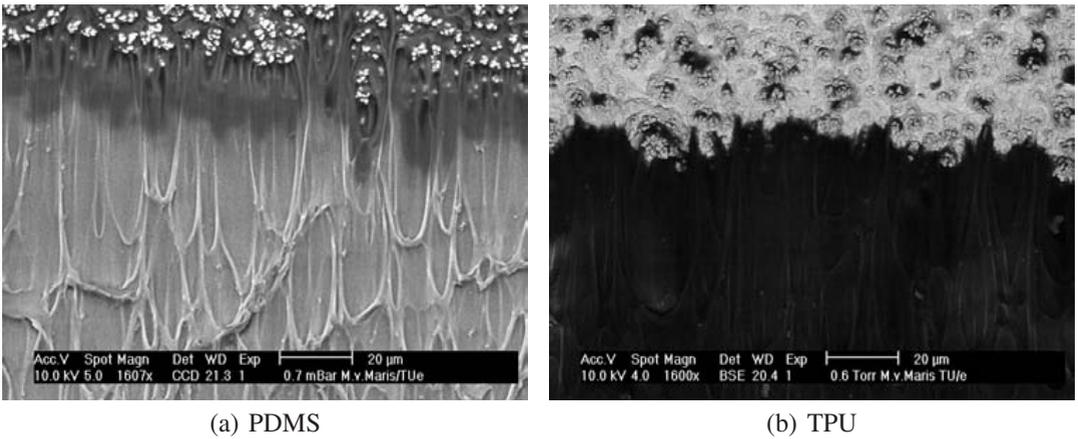


Fig. 2: *In-situ* ESEM image of a progressing delamination front of the copper rubber interface.

T. Löhner of TU-Berlin and J. Vanfleteren of IMEC Ghent are gratefully acknowledged for their work regarding sample preparation.