

Fibre-reinforced composites based on blends of thermoplastics and epoxy resin

Citation for published version (APA):

Saalbrink, A., & Peijs, A. A. J. M. (1996). *Fibre-reinforced composites based on blends of thermoplastics and epoxy resin*. Poster session presented at MaTe Poster Award 1996 : first annual poster contest.

Document status and date:

Published: 01/01/1996

Document Version:

Accepted manuscript including changes made at the peer-review stage

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

Fibre-Reinforced Composites based on Blends of Thermoplastics and Epoxy Resin



A. Saalbrink and T. Peijs

Eindhoven University of Technology,
Faculty of Mechanical Engineering,
Section Materials Technology,
P.O. Box 513, NL 5600 MB Eindhoven



Introduction

Fibre-reinforced composites based on thermoplastics are often produced by way of melt- or solution fibre impregnation routes. Because of the relatively high melt viscosities of thermoplastic polymer melts, melt impregnation is often only achieved using low molecular weight polymer, resulting in poor mechanical properties. In the case of solution impregnation techniques, the solution provides a low viscosity media that can easily impregnate the fibres. After impregnation the solvent is removed by conventional drying operations. However, the presence of residual solvent can result in a reduction of T_g and in poor fibre-matrix interface conditions, which is widely recognised as a major problem.

In order to overcome these drawbacks in conventional solution impregnation, a new processing route based on the use of epoxy resins as reactive solvents is currently under development at the Centre for Polymers and Composites, see [1, 2].

In this route the epoxy resin acts as an effective solvent by lowering the viscosity and (or) the processing temperature of the polymer matrix material and therefore facilitating the impregnation of fibres. By means of in-situ curing of the reactive solvent after impregnation, phase separation and phase inversion occurs. In this way the solvent will become the dispersed phase and a structural part of the material.

Moreover, it has been shown that upon this chemically induced phase separation the epoxy can preferentially migrate to the reinforcing fibre surface. This phenomenon of interfacial phase separation creates the potential to tailor the macroscopic properties of the fibre-reinforced composites based on these blends by changing the chemistry of the in-situ formed epoxy interlayer, see [3]. A schematic representation of this process is shown in figure 1.

Research Topics

- The influence of processing conditions and constituent properties on the occurrence of interfacial phase separation in fibre-reinforced composites based on a model thermoplastic - epoxy blend.
- The influence of the properties of the phase-separated matrix morphology and interlayer (glassy versus rubbery epoxy phase) on the macroscopic composite properties such as strength, fracture toughness and impact resistance. This is studied for a number of amorphous and semi-crystalline thermoplastics.

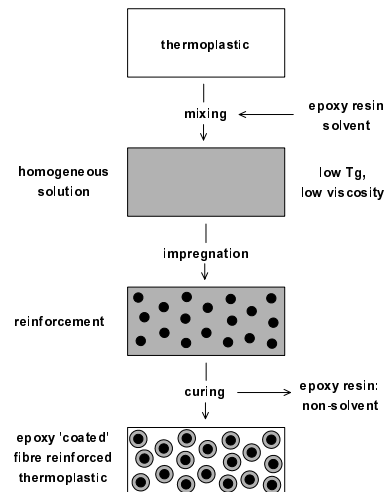


Figure 1 Schematic representation of the concept of processing of thermoplastic composites using reactive solvents and the occurrence of interfacial phase separation.

References:

- [1] R.W. VENDERBOSCH, H.E.H. MEIJER AND P.J. LEMSTRA, *Polymer* (1995), **36**, 1167.
- [2] H.E.H. MEIJER, R.W. VENDERBOSCH, J.G.P GOOSSENS AND P.J. LEMSTRA, *High Perf. Polym.* (1996), **8**, 133.
- [3] R.W. VENDERBOSCH, T.PEIJIS, H.E.H. MEIJER AND P.J. LEMSTRA, *Composites* (1996), **27A**, 895.