

Tissue-engineered model for evaluating skeletal muscle damage in pressure ulcers

Citation for published version (APA):

Gawlitta, D., Bouten, C. V. C., Oomens, C. W. J., & Baaijens, F. P. T. (2004). *Tissue-engineered model for evaluating skeletal muscle damage in pressure ulcers*. Poster session presented at Mate Poster Award 2004 : 9th Annual Poster Contest.

Document status and date:

Published: 01/01/2004

Document Version:

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

Tissue-engineered model for evaluating skeletal muscle damage in pressure ulcers

D. Gawlitta, C.V.C. Bouten, C.W.J. Oomens, F.P.T. Baaijens

Eindhoven University of Technology, Department of Biomedical Engineering

Introduction

The most adhered hypothesis for the development of (deep) pressure ulcers is that local anoxia (0% O₂) initiates tissue breakdown. Another, more recent hypothesis is that cellular deformation due to tissue compression causes tissue degeneration. A model system has been developed to investigate the relative contributions of anoxia and compression in the development of pressure ulcers in engineered muscle tissue. The effects of anoxia and/or compression are monitored in time using 'viable' markers for cell damage and cell death.

Engineering of skeletal muscle

Myoblasts (muscle cells) were suspended in a collagen I solution [1]. The mixture was molded into shape in modified culture dishes [2] with pieces of Velcro as anchoring points (fig 1). As a result of cellular matrix remodeling a static pre-stress was created, causing myotube alignment.



Figure 1 Macroscopic change of the gel appearance from the moment of molding (d0), to day 1 (d1) and day 2 (d2).

After gelling in growth medium, the medium was shifted to two types of differentiation medium (2%HS and serum-free) to initiate maturation of the cells into myotubes. At days 2 and 6 after shifting F-actin staining of the constructs showed the beneficial effect of the serum-free medium on myotube development and alignment (fig 2).

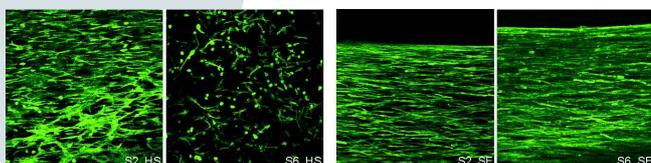


Figure 2 F-actin staining of engineered muscle at the location indicated in figure 1. Left: Shift days 2 and 6, differentiated with serum (HS). Right: Shift days 2 and 6, differentiated without serum (SF).

Compression and anoxia

A compression device was assembled consisting of an indenter in a small incubator that can be mounted onto the stage of a confocal microscope (fig 3). The oxygen level in the device is adjustable between anoxic and normoxic (20%) conditions. Temperature (37°C) and humidity (100%) can also be controlled.

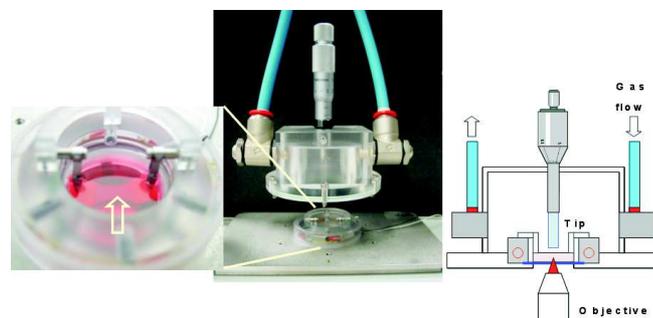


Figure 3 Left: The incubation well is shown; arrow indicates engineered muscle. Center: the complete set-up is shown. Right: a schematic of the set-up located above the laser scanning objective for real-time monitoring of the tissue.

Markers of cell damage

A protocol was developed for real-time monitoring of cell death development (apoptotic and necrotic, figure 4). Irreversible cell damage can be quantified by measurement of NO, and creatine kinase release from the cells.

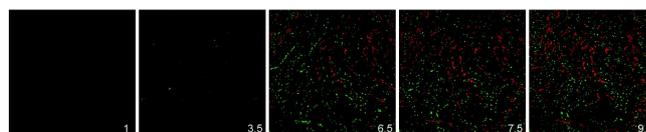


Figure 4 Development of cell death in time. Some cell nuclei that stained apoptosis-positive (green) at 6.5 hours, were necrotic (red) at 7.5 and 9.5 hours.

Conclusions

Three methods have been developed, which can provide insight in cell survival during poor oxygenation and/or compression of skeletal muscle tissue. The amount of cell damage and cell death can be quantified and qualified in time. Together with results from numerical and animal studies the results can be translated into guidelines for clinical practice.

Future

Experiments on the engineered skeletal muscle to monitor:

- damage from static and dynamic compression
- anoxic damage
- combined compressional and anoxic damage

References:

- [1] BREULS R.G. ET AL.,: *Tissue Eng.*, 2003, 9(2): 269-81.
- [2] DENNIS R.G. ET AL.,: *Am J Physiol Cell Physiol.*, 2001, 280(2): C288-95.