

Role of fluid flow during crack propagation in porous media

Citation for published version (APA):

Pizzocolo, F., Huyghe, J. M. R. J., Ito, K., Remmers, J. J. C., & Borst, de, R. (2009). *Role of fluid flow during crack propagation in porous media*. Poster session presented at Mate Poster Award 2009 : 14th Annual Poster Contest.

Document status and date:

Published: 01/01/2009

Document Version:

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy


If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

Role of fluid flow during crack propagation in porous media

F. Pizzocolo, J. Huyghe, K. Ito, J. Remmers, R. de Borst

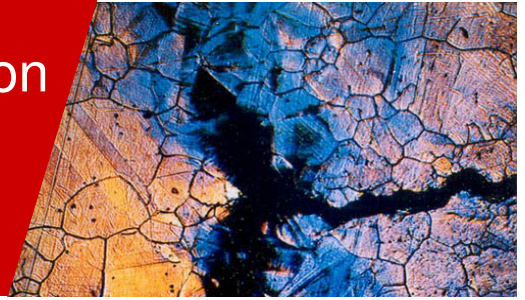

Introduction

We want to investigate under which conditions a fracture can initiate or propagate in the IVD (Figure 1) and, in general, to understand the role that fluid flow has during crack propagation.

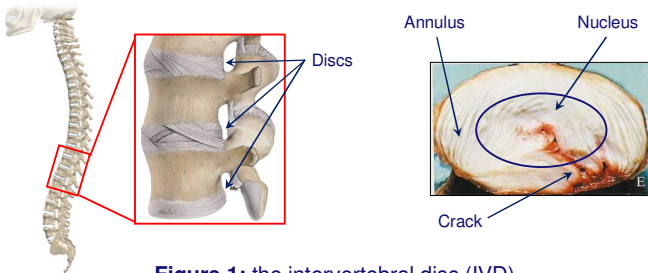


Figure 1: the intervertebral disc (IVD)

Using standard finite element formulations the mass balance is fulfilled only globally (Figure 2). Fluid and solid are strongly coupled, so fluid flow has to be evaluated locally to predict deformations and stresses and with that propagation. Using a mixed formulation this problem is tackled.

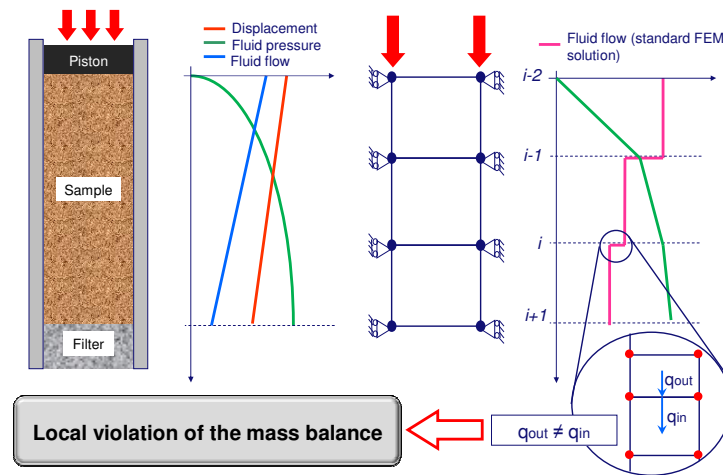


Figure 2: 1D consolidation problem. Left: exact solution. Right: approximated solution with standard finite element.

Objective

To develop a finite element formulation that estimates exactly the fluid flow and permits to put crack in an arbitrary position in the model.

Method

Porous media are modeled by Lanir's biphasic theory [5]. The governing equations are: momentum balance (with a constitutive linear stress-strain relation) and mass balance (with the Darcy's law equation) [2]. The idea behind the hybridization technique is to introduce a Lagrange multipliers λ to enforce the continuity of the normal component of the fluid flow [4].

Momentum equation

$$\vec{\nabla} \cdot \sigma = \vec{0} \quad \sigma = \sigma_e - pI$$

Mass balance equation

$$\vec{\nabla} \cdot \vec{v} + \vec{\nabla} \cdot \vec{q} = 0 \quad \vec{q} = -K\vec{\nabla}p$$

Fluid flow "forced" condition

$$\lambda(q_{IN} - q_{OUT}) \cdot \vec{n} = f_f \quad \lambda = \text{Lagrange multiplier}$$

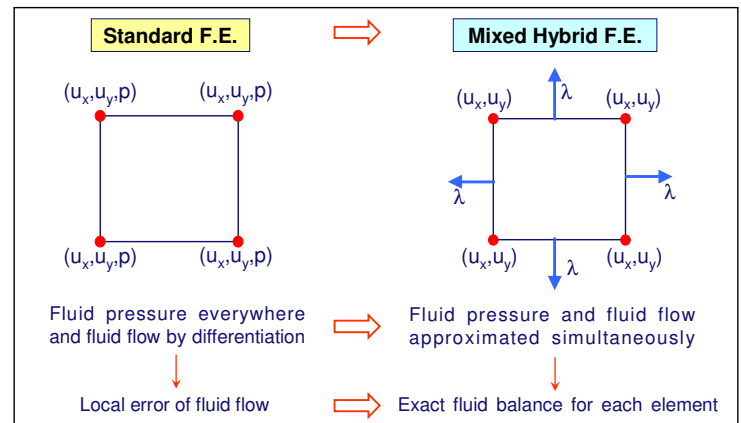



Figure 3: differences between standard and mixed hybrid FEM.

The mixed hybrid formulation is implemented with the Partition of Unity method. Using this method the cracks can be placed anywhere in the model and can propagate in any arbitrary direction without remeshing [1,3].

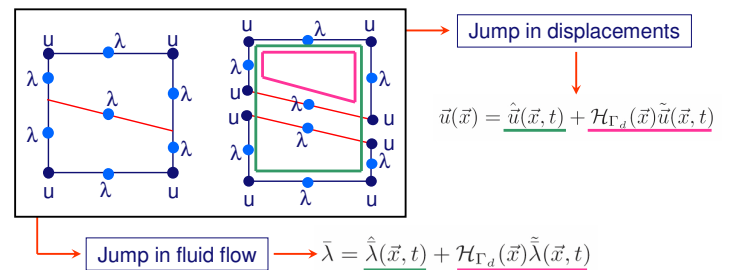


Figure 4: discretization with the Partition of Unity method (PUM)

Results

We develop a mixed hybrid formulation with discontinuity for 2D poroelasticity with discontinuity. Implementing this formulation in C++ we will be able to understand the role of the fluid during crack propagation in porous materials.

References

- [1] J.C. Remmers, *Comp. Mech.*, **31**, 2003
- [2] J.M. Huyghe, *Int. J. Engng Sci.*, **35**, 1997
- [3] F. Kraaijeveld, *PhD Thesis*, 2009
- [4] K. Malakpoor, *ESAIM*, **41(4)**, 2007
- [5] Y. Lanir, *Biorheology*, **24**, 1987