

# Multi-scale modelling of fibrillation in copper-rubber interface delamination

**Citation for published version (APA):**

Vossen, B. G., Schreurs, P. J. G., Sluis, van der, O., & Geers, M. G. D. (2012). *Multi-scale modelling of fibrillation in copper-rubber interface delamination*. Poster session presented at Mate Poster Award 2012 : 17th Annual Poster Contest.

**Document status and date:**

Published: 01/01/2012

**Document Version:**

Accepted manuscript including changes made at the peer-review stage

**Please check the document version of this publication:**

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

**General rights**

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

[www.tue.nl/taverne](http://www.tue.nl/taverne)

**Take down policy**

If you believe that this document breaches copyright please contact us at:

[openaccess@tue.nl](mailto:openaccess@tue.nl)

providing details and we will investigate your claim.

# Multi-scale modelling of fibrillation in copper-rubber interface delamination



Bart Vossen, Piet Schreurs, Olaf van der Sluis, Marc Geers

## Introduction

Copper-rubber interfaces play a major role in a variety of products, such as stretchable electronics, figure 1.



Figure 1: Stretchable electronics examples. Left: heart ablation catheter. Right: Electronic skin for wearable mobile phone.

Interface delamination causes failure of the product. An important delamination mechanism is fibrillation, see figure 2. During peeling, the dissipation mechanisms depend on the loading conditions, rendering the experimentally determined interface properties intrinsically case-specific. This hinders the development of generally applicable predictive models.

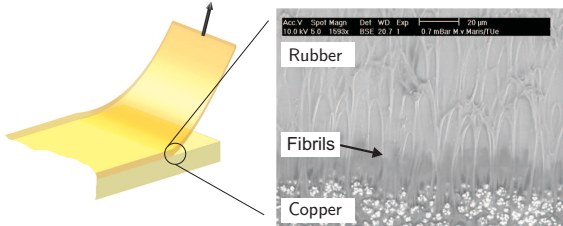


Figure 2: Fibrillation in peel test [1].

**Objective:** Develop a multi-scale method to take into account the micro-scale dissipation mechanisms explicitly in the macroscopic interface description.

## Methods

The multi-scale approach is outlined in figure 3. Cohesive zones (CZs) are used to describe the interface behavior on the macro-scale. The CZ traction-opening relation is obtained from the underlying micro-mechanical model. The current micro-model consists of a single fibril. The roughness of the substrate is taken into account in a simplified way.

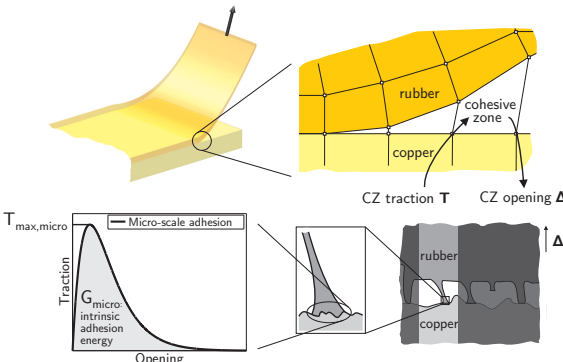


Figure 3: Multi-scale procedure. Macro (top) and micro (bottom).

## Results

Micro-model results are shown in figure 4. The graph shows the homogenized traction-separation response obtained from the single fibril model. The insets show several stages of the fibrillation process. The last inset shows the fibril right before it suddenly debonds from the copper. This causes the loss of the energy stored in the fibril, leading to macroscopically observed dissipated energy  $G_{macro}$ .

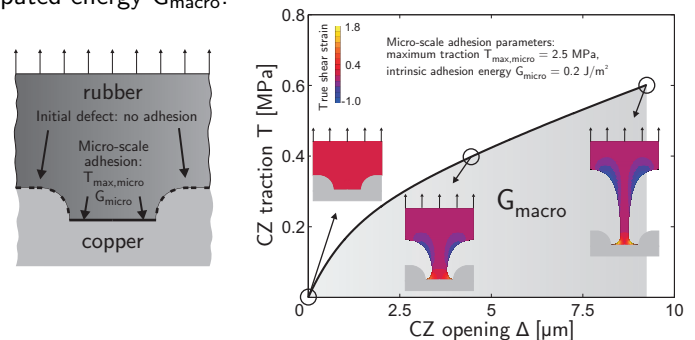


Figure 4: Left: Initial single fibril geometry with simplified roughness profile. Right: Homogenized traction-separation response.

The influence of the micro-scale adhesion parameters (maximum traction  $T_{max,micro}$  and intrinsic adhesion energy  $G_{micro}$ ) on the macroscopic dissipation  $G_{macro}$  is shown in figure 5. The insets show the final deformed shape; for low  $T_{max,micro}$  no fibrillation occurs and micro-scale delamination prevails,  $G_{macro} = G_{micro}$ .

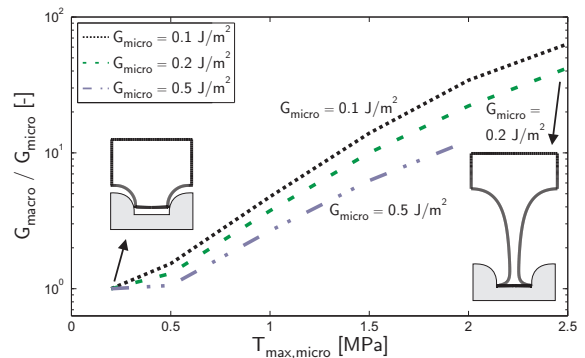


Figure 5:  $T_{max,micro}$  controls the fibrillation process.

## Conclusions

- A micro-model describing fibrillation was developed.
- Fibrillation was taken into account in the macroscopic interface description.
- The micro-scale parameter  $T_{max,micro}$  mainly controls the fibrillation process.
- The macro-scale dissipated energy  $G_{macro}$  can be orders of magnitude larger than the intrinsic adhesion energy  $G_{micro}$ .

## References:

[1] vd Sluis, O. et al.: J. Phys. D: Appl. Phys., 44:034008, 2011