

Where to exert abatement effort for sustainable operations considering supply chain interactions?

Citation for published version (APA):

Tan, T., & Koomen, A. A. C. (2014). *Where to exert abatement effort for sustainable operations considering supply chain interactions?* (BETA publicatie : working papers; Vol. 467). Technische Universiteit Eindhoven.

Document status and date:

Published: 01/01/2014

Document Version:

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

Where to exert abatement effort for sustainable operations considering supply chain interactions?

Tarkan Tan, Astrid Koomen

Beta Working Paper series 467

BETA publicatie	WP 467 (working paper)
ISBN	
ISSN	
NUR	804
Eindhoven	December 2014

Where to exert abatement effort for sustainable operations considering supply chain interactions?

Tarkan Tan

School of Industrial Engineering, Eindhoven University of Technology, 5600 MB Eindhoven, The Netherlands, t.tan@tue.nl

Astrid Koomen

Docdata, Energieweg 2, 5145 NW Waalwijk, The Netherlands, koomenastrid@gmail.com

Abstract

We consider the problem of how firms can take into account the dynamics of supply chain interactions when “greenifying” their operations. We introduce a framework which firms can use in defining the right optimization problem and system boundaries when they want to exert abatement effort by considering the supply chain wide effect of abatement options. Our framework, which is applied at a chemical company, can help firms in determining which impact certain decisions have on other firms’ emissions in the supply chain and the resulting total footprint of the product.

Keywords: Carbon emission; Carbon footprint; Sustainable operations; Value chain; Operations management

1 Introduction

The widespread concern over global warming puts pressure on companies to reduce carbon emissions and become green. It is imminent that the global pressure will increase in an increasing manner and that sustainability will -and should- increasingly drive Supply Chain Management Decisions. The external pressure on the companies is basically three-fold:

1. Customers: Individual consumers in B2C environments (especially in developed countries), as well as customers in B2B environments apply increasing pressure to improve sustainability.
2. Regulations: There are legal requirements of the European Union and some national governments in the area of carbon dioxide and also other greenhouse gas (GHG) emissions, which enforce the companies to become greener. Governments have also changed the laws to reflect a cradle-to-grave perspective, which makes it essential to consider the problem whole supply chain-wide. A very important regulation is the EU Emission Trading Scheme (ETS), which is the largest multinational, multi-sector greenhouse gas emissions trading scheme worldwide. The ETS is currently restricted in scope, but it already covers approximately half of the EU’s carbon emissions and is expected to be expanded (sector wise, scope wise, and country wise).

3. Environmental groups: Initiatives such as the Carbon Disclosure Project (CDP) gain more attention and support globally. In particular, CDP reports indicate that 82% of Global 500 companies disclosed their emissions in 2012 (Carbon Disclosure Project, 2012). Europe has been leading in both disclosing its emission and introducing ETS, but there are also other initiatives and developments making a global emission trading scheme visible in the horizon. Currently, the carbon market in the United States is largely a voluntary market dominated by financial players and companies that want to hedge their exposure to potential future emission-reduction rules. Nevertheless, the northeastern states have started the 'Regional Greenhouse Gas Initiative' in 2009¹, which is the first mandatory, market-based cap-and-trade program to cut carbon emissions in the United States. Similarly, the California Air Resources Board (CARB) adopted a Cap and Trade Regulation on October 20, 2011². Furthermore, there are initiatives such as Western Climate Initiative (WCI)³ and Chicago Climate Exchange (CCX)⁴, where the former is an initiative started by states and provinces along the western rim of North America to combat climate change caused by global warming, independent of their national governments, and the latter is a voluntary, legally binding greenhouse gas reduction and trading system for emission sources and offset projects in North America and Brazil.

Companies increasingly realize that often a large part of their carbon footprint is outside of their control, i.e. Scope 3 emissions, following the terminology of the GHG protocol. Nevertheless, many companies that are not even bound to regulatory enforcements measure, report, and offset their emissions, including their Scope 3 emissions, as a part of their corporate responsibility policy. For example, Natura Cosméticos has the policy of offsetting more than its declared emissions -to cover for uncertainties in the measurement process-, resulting in "carbon negative" products, even though only 3% of their emissions are of Scope 1 and 1% of their emissions are of Scope 2, resulting in 96% of their declared emissions being accounted for in Scope 3⁵.

Other than the external pressure on companies to become green, there also exist economic reasons for companies to "green" their supply chains, which coincide with the reasons for them to green their operations: Partly because of the correlation between cost and energy use, i.e. carbon hot spots are good places to look for potential cost savings; and partly for marketing reasons, where a green image might help them gain competitive advantage. Whether it is a regulation or own initiative,

¹ <http://www.rggi.org>, last accessed June 4, 2013

² <http://www.c2es.org>, last accessed May 28, 2013

³ <http://www.wci-inc.org>, last accessed May 28, 2013

⁴ <http://www.chicagoclimatex.com>, last accessed June 4, 2013

⁵ Natura Cosméticos. 2009. Carbon Neutral 2009.

<http://www2.natura.net/Web/Br/Inst/CarbonoNeutro2009/src/EN/PDF/NaturaCarbonNeutral2009.pdf>, last accessed June 11, 2013

companies that compensate for their emissions have direct economic consequences of their emission declarations which are mostly verified by independent bodies. Nevertheless, one critical question prevails: which company in the supply chain can be accounted for emissions of a final product or service? Each company in a supply chain contributes to the total carbon footprint of a product or service and also each company can exert effort in minimizing its contribution to this carbon footprint. However, such an approach overlooks the dynamics of supply chain interactions and neglects the operations in the upstream or downstream supply chain that are affected by these decisions. It can be therefore also useful for a company to exert effort in lowering the emissions of operations more upstream or downstream in the supply chain. This can for example be accomplished by changing the dimensions of a product, the required storage conditions, the durability, etc., resulting in less energy-intensive process requirements. For example, manufacturers of products that have a high water content and of which the water needs to be mixed with the product under special circumstances (e.g. under pressure, at a specific temperature etc.) can try to produce and sell concentrates (i.e. semi-finished product). The customer can finalize the product by adding the water itself under these special circumstances. Selling semi-finished products in this way and collaborating with the customer in order to finalize the product can reduce packaging waste because the volume of the product will be less and it would also decrease transport related carbon-emissions. Another example is a product of Eastman Chemical Company that can be sold to customers in a solid state or in a molten state. These different states have not only an impact on Eastman's carbon emissions but also on its customer emissions. The storage conditions of the solid state is different than that of the molten state: the solid state can be stored as pastilles in bags and the molten state needs to be stored in tanks that keep the product on a specific temperature 24/7 to assure that it will remain molten. Keeping a product on a specific temperature requires more energy than just storing it in a warehouse. The impact on carbon emission of the two different states will be discussed in more detail in Section 4 of this paper. Lowering the carbon emissions can also be accomplished by collaboration, coordination, economic power or information sharing. For example a manufacturer of fried potatoes can reward farmers who produce potatoes with low water content. In this way, the fried potato manufacturer decreases his emissions because potatoes which have low water content require less frying time and thus require less energy (The Carbon Trust, 2006).

Note that the improvements at a certain actor and his suppliers would not only result in a decrease in Scope 1, 2, and 3 emissions of that actor, but it could also abate the emissions of other parties in the supply chain for the reasons stated above -among others-, which goes beyond the scope classification and defined responsibilities in the GHG protocol (say, "Scope 3+" emissions). Those emissions also need to be taken into account if a complete supply chain perspective is to be

considered instead of a myopic approach. In this article we introduce a simple but effective framework for addressing the problem of GHG emissions in a general supply chain with any number of firms, decomposing the total footprint into separate footprint components, each of which can be influenced by any combination of any number of firms in the supply chain. With that structure, we are able to represent the total footprint as a function of the decisions made in the supply chain. This framework enables firms to define the right optimization problem and also the right system boundaries.

For the parties collaborating and coordinating their abatement efforts, the parties involved in the supply chain exert effort to abate their emissions, which might be internally bound to offsetting all emissions that are attributed to a company, even if this concerns Scope 3 emissions and beyond - which we have referred to as Scope 3+ above-. A company that participates in the offsetting approach would be likely to do so with the motivation of social responsibility, competitive advantage, or customer requirements, as Scope 3 emissions are not regulated (yet). In any case, such a company has a natural additional motivation to abate its emissions: offsetting costs. Note that the carbon price at a cap-and-trade scheme serves a similar purpose, where the emissions above the cap are “offset” in the sense that the sellers of these emission rights have emitted less than what they are allowed to. Furthermore, it is most likely that a powerful leading company is involved in such a collaboration and coordination process, encouraging or even “forcing” her supply chain partners to abate their emissions. For example, WalMart conducts detailed carbon footprint analyses and sets improvement targets for her suppliers⁶. In that case, while WalMart’s motivation is in terms of social responsibility and competitive advantage, it becomes an absolute necessity for the suppliers of WalMart to abate their emissions in order to be able to continue business with WalMart, as long as it is profitable to do so. A participating company’s objective is then to maximize his value added less all carbon related costs. One could argue that coordination is not necessarily a result of companies not being willing to pay for offsetting, but an effort to actually cut down the emissions rather than “paying off” for them. Those who oppose offsetting also refer to non-verified offsetting options that actually do not have a significant or even positive impact on carbon emissions.

The major complicating factor in conducting such an analysis is that many emissions result from activities that multiple parties in the supply chain (can) influence. We depart from existing supply chain literature on carbon footprints, which assumes that emissions are uniquely and unambiguously linked to specific actors in the supply chain, and introduce a more general framework where carbon

⁶ Cremmins, B. 2013. CDP and Walmart: A partnership to reduce suppliers’ greenhouse gas emissions. Walmart February 13, 2013. <http://www.walmartgreenroom.com/2013/02/cdp-and-walmart-a-partnership-to-reduce-suppliers-greenhouse-gas-emissions/>, last accessed June 11, 2013

footprints consist of multiple components, each of which can be influenced by one or more supply chain parties.

Our contribution in this paper is twofold: First, we propose a modelling framework to determine which impact certain decisions made by firms in a supply chain have on the total footprint of a product in the supply chain. Second, we introduce a case study where we apply our proposed framework and provide insights based on this case. The case study that was performed at Eastman Chemical Company, which has the ability to change the property of one of their products, in which case the buyer firm needs different production processes or keeping conditions. By using the proposed framework, the right boundaries were defined and the supply chain impact of the decision to change the property of the product was analysed, leading to a different conclusion than the one when the boundaries are myopically defined and the supply chain impact is ignored.

Section 5 describes the case study performed at Eastman Chemical Company. Eastman is a global specialty chemicals company that manufactures chemicals, fibers and plastic materials that are found in products people use every day. The case study treated in this report was initiated by Eastman. Particularly due to the fact that natural resources are becoming scarcer Eastman is committed to embed sustainability in their product development and innovation process, which does not only make sense for their business, but also makes sense for the world.

2 Literature

In this paper we focus on and aim to further develop two areas: sustainable supply chains and supply chain collaboration (or environmental collaboration). Accordingly, we first review the literature in which abatement options to reduce GHG emissions in supply chains are treated, and then the literature on supply chain collaboration. Seuring and Muller (2008) define sustainable supply chain as “the management of material, information and capital flows as well as cooperation among companies along the supply chain while taking goals from all three dimensions of sustainable development, i.e. economic, environmental and social, into account which are derived from customers and stakeholders’ requirements”. Literature reviews of Kleindorfer et al. (2005), Corbett and Klassen (2006), Srivastava (2007) show that research tends to be highly focused on abatement options like recycling or reuse. In addition, more and more articles are focused on reducing GHG emissions by optimizing operational decisions across the supply chain. For example, Benjaafar et al. (2013) introduce various variants of traditional lot sizing models which minimize costs and incorporate carbon dioxide emissions considerations. Hua et al. (2011) developed a modified EOQ model with which they examine how carbon emission trading mechanisms influence inventory management decisions. Hoen et al. (2014) analyze the problem of transport mode choice and focus

on the impact of regulations and carbon costs. A situation is considered in which a company has the option to choose between different modes of transport to receive goods from its supplier. Companies can use this analysis to decide which transport mode to select when considering the environment. In our paper we also consider what kind of effects this kind of decision making has on other operations more up and/or downstream in the supply chain.

The carbon footprint of an entire supply chain is typically determined by using life cycle analysis (LCA). LCA can be used to assess and evaluate the environmental burden of products or services through all phases of its life. All types of impact upon the environment are covered in the term environmental burden, including emissions of greenhouse gases (GHG), different types of land use and extraction of different types of resources. An LCA limited to GHG emissions is often called carbon footprinting. Sundarakani et al. (2010) developed an analytical model that can be used to determine the carbon footprint of an entire supply chain. With the model of Sundarakani et al. (2010) companies can analyse which stage of a supply chain accumulates waste and can use this information to implement abatement options to reduce carbon emissions. Our study complements LCA by focusing on supply chain impact of abatement activities on processes that directly or indirectly influences carbon emissions of other parties in the supply chain.

Activities regarding green supply chain management also require collaboration with both suppliers and customers. Despite all efforts in the area of green supply chain management, literature is scarce with respect to environmental supply chain collaboration. Supply chain collaboration is defined as two or more companies within a supply chain sharing the responsibilities of exchanging common planning, management, execution, and performance information (Anthony, 2000; Vachon & Klassen, 2008). Vachon and Klassen (2006) split the inter-organizational activities in green supply chain management into environmental supply chain collaboration and environmental monitoring. Supply chain collaboration can be defined as 'activities comprising a direct involvement of the buying organization with its suppliers to jointly develop environmental solutions' (Vachon & Klassen, 2006). While this definition only focuses on the organization-supplier relationship we would like to stress that collaboration is not only a relationship between the organization and parties more upstream in the supply chain but also between the organization and parties more downstream in the supply chain. Vachon & Klassen (2008) examined the impact of environmental supply chain collaboration on manufacturing performance. Their study showed that environmental collaboration with suppliers was linked to improving processed based-performance and collaboration with customers was linked to improving product based-performance. In our paper we stress the fact that it is also important to know what kind of impact environmental collaboration with a supplier has on activities more

downstream in the supply chain. For example, in the ink industry there is a measurement called volatile organic compound (VOC) which is a measurement of how many organic material in an ink will evaporate. Manufacturers in the ink industry reacted to customers' needs to reduce VOC by developing hybrid inks. During a print run, hybrid inks produce less VOC than petroleum-based printing inks (Vachon & Klassen, Environmental management and manufacturing performance: The role of collaboration in the supply chain, 2008). This however does not mean that the production of hybrid inks is cleaner than that of petroleum-based printing inks.

Caro et al. (2013) introduced a joint production model where carbon emissions of a whole supply chain are incorporated. Their paper answers the question: 'how should responsibility for the total supply chain emissions be allocated to the various firms in order to encourage jointly optimal emissions abatement effort?'. In the model that is used to tackle this question, the total footprint is decomposed into multiple processes and the emissions of each process can be affected by any company in the whole supply chain. It turns out that over-allocating emissions is required to achieve a "carbon-optimal" supply chain. While Caro et al. (2013) focus on the emission allocation problem for joint processes, our framework considers the supply chain wide effect of abatement options with the purpose of defining the right optimization problem and system boundaries.

3 Modeling Framework

In this section we introduce a realistic framework where a firm does not only cause emissions due to its own operations, but its emissions might also depend on the operations upstream and/or downstream in the supply chain due to joint processes. Similarly, the firm's operations might also affect the emissions upstream and/or downstream in the supply chain. We define joint processes in the general sense, such that a number of firms can affect total emissions of a process even through simple collaborative activities like information sharing or the lack of it. Such a framework enables representing the total footprint as a function of the decisions made in the supply chain. With this framework firms can define the right optimization problem and system boundaries. We focus on carbon dioxide emissions in this article, but it is also possible to use the same framework for other GHG emissions. We also consider a single product setting for simplicity of exposition.

The carbon accounting standard of the GHG protocol is used as a baseline in this framework. In this standard, three types of emissions are defined: Scope 1 (direct emissions, e.g. due to production processes), scope 2 (indirect emissions from energy usage) and scope 3 (other indirect emissions, e.g. due to transport). The total carbon footprint (F) of a product is the sum of its scope 1, 2, and 3 emissions, which might emanate from multiple components that are possibly carried out at different

firms. Hence, multiple firms within a supply chain can influence the carbon footprint F . If firms collaborate as in the examples provided in Section 1, this would change their processes and impact their emissions in different scopes.

From this example we can see that a firm's decisions might affect its own emissions, as well as the other firms' emissions. We model this in our framework by separately defining the internal and external efforts (resulting in emission abatement) associated with each possible action n out of the set of all possible actions \mathbf{N} of the focal firm. The reduction efforts that the firm would exert associated with each possible action n is given by $\mathbf{e}^i = e_n^i \forall n \in \mathbf{N}$ for all internal efforts and $\mathbf{e}^e = e_n^e \forall n \in \mathbf{N}$ for all external efforts. Internal efforts are the actions of the firm that influence its internal footprint F^i regarding the product (e.g. changing a production process), and external efforts are those that influence the external footprint F^e originating from the other firms in the same supply chain (e.g. changing the properties of the product, which will require operational changes at the buyer firm; or simply sharing advance demand information). We note that an internal (external) effort could require corresponding external (internal) effort, together which they constitute action n . Therefore, e_n^i and e_n^e may assume any value, including zero, for action n . Accordingly, we define the total carbon footprint of the focal firm as $F(\mathbf{e}^i, \mathbf{e}^e)$.

The decision as to how much effort a firm is going to exert in the abatement options must be aligned with the firm's sustainability strategy. We present four possibilities in Table A. Option 1 aims to minimize the total footprint subject to a total abatement budget. Option 2 is similar to option 1, except there is no overall budget to freely allocate, but separate budgets are assigned for some of the (pre-approved) actions in \mathbf{N} . However, many firms operate under cost minimization (or profit maximization) objective and set a total footprint reduction target, as stated in options 3 and 4, where option 3 constrains the footprint with a target total footprint, and option 4 aims for a percent reduction of the current footprint with no additional efforts, denoted by $F(0,0)$. Such reduction targets are commonly observed as in practice. To name a few examples, Tesco has committed to reduce the carbon footprint of the products they sell by 30% by 2020⁷ and Unilever committed to halve the greenhouse gas impact of their products across the lifecycles by 2020⁸. This option might be seen as the most environmental friendly one as long as the reduction target is ambitious enough, because it would then mean that also costly effort needs to be exerted if the "low hanging fruit" will

⁷ Tesco. 2012. Corporate Responsibility Review 2012.

http://www.tescopl.com/files/pdf/reports/tesco_cr_review_2012.pdf, last accessed June 4, 2013

⁸ Unilever Sustainability Living Plan, Available at <http://www.unilever.com/sustainable-living/uslp/>, last accessed June 4, 2013

not be sufficient. On the other extreme, if there is abundant number of cost-efficient actions for abatement, options 1 and 2 might be better for the environment, as abatement will not stop when easy targets are reached. It is of course possible to define other optimization strategies than the ones in table 1.

Table 1 optimization strategies

Option	Minimization problem
1	$\text{Minimize } F(\mathbf{e}^i, \mathbf{e}^e)$ $\text{s. t. } TC(\mathbf{e}^i, \mathbf{e}^e) \leq \text{Total budget}$
2	$\text{Minimize } F(\mathbf{e}^i, \mathbf{e}^e)$ $\text{s. t. } C(\mathbf{e}_n^i, \mathbf{e}_n^e) \leq \text{Budget}(\mathbf{e}_n^i, \mathbf{e}_n^e) \quad \forall n \in \mathbb{N}$
3	$\text{Minimize } TC(\mathbf{e}^i, \mathbf{e}^e)$ $\text{s. t. } F(\mathbf{e}^i, \mathbf{e}^e) \leq \text{Target total footprint}$
4	$\text{Minimize } TC(\mathbf{e}^i, \mathbf{e}^e)$ $\text{s. t. } F(\mathbf{e}^i, \mathbf{e}^e) \leq F(0,0) * \% \text{ reduction target}$

Since the execution of a reduction action might also influence the emissions elsewhere, a crucial point for a firm in making carbon abatement effort decisions is how to define the boundaries of the problem. The left-hand side of figure 1 depicts a top-down emission framework that specifies different levels of boundary choice from a supply chain perspective, and the right-hand side depicts the corresponding costs. Level 1, which is the highest level in figure 1 represents the ideal boundary; the total carbon footprint within the whole supply chain, $F = F^j + F^e$. If supply chain collaboration is not possible for political, economic, or any other reason, or abatement efforts are considered to be an “internal issue” of the focal firm, then the second best alternative is to consider the total internal footprint F^j , which consists of three elements that can directly be influenced by the decision maker: F_p^j , the footprint originating from internal production processes that contribute to the production of the final usable product; F_f^j , the footprint due to process steps that come after production of the usable product and before transportation (e.g. packaging); and F_t , the transport footprint originating from outbound logistics, which might be internal, external, or joint, depending on the agreement made on terms of delivery. The corresponding external footprint components, F_f^e (external emissions from process steps after transportation and before production) and F_p^e (emissions due to the production processes of the customer) are then labelled as “out of scope” by the focal company.

When decision making cannot be bound even to level 2, then a myopic level 3 decision making is the next choice. Although we stop our framework at level 3, many practices address particular

production process (say, level 4), ignoring even the interaction with other production processes. A boundary definition that is too narrow is clearly prone to result in poor decision making: The decisions made with level 2 scope could be suboptimal for the supply chain wide footprint of the product, and the decisions made with level 3 scope could be suboptimal for company wide footprint of the product. For example, if the decision is based solely on transport emissions, then the product needs to be made as small and light as possible and in such a way that it can be transported without particular air conditioning requirements, where the additional emissions in transforming the product this way might surpass the savings. On the other hand, that will not change as a function of the internal and external efforts associated with the available reduction options.

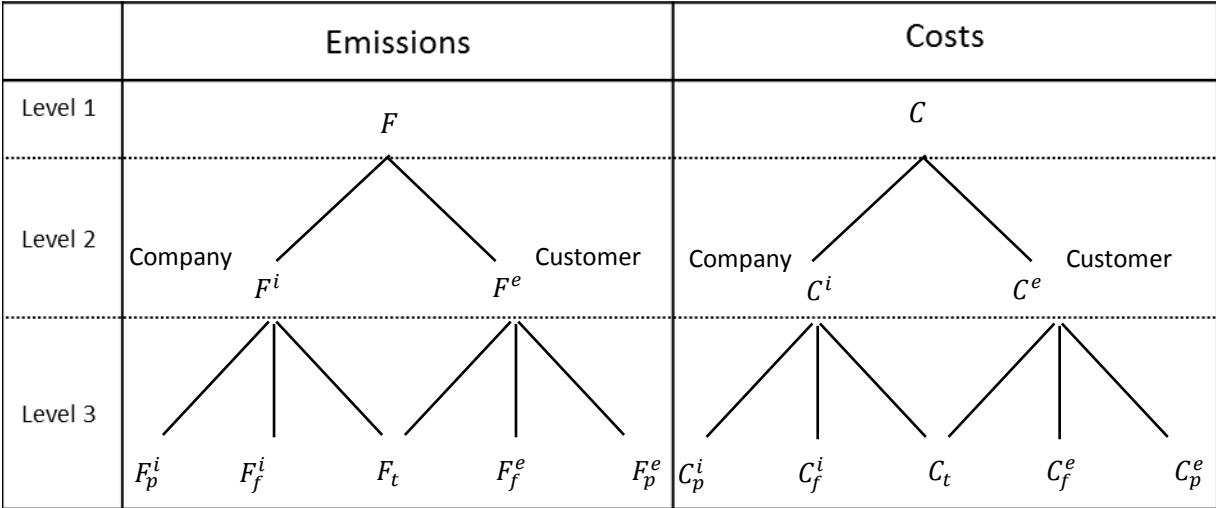


Figure 1 Top down framework

4 Case study

The framework described in the previous section was applied to the process of one of the products of the chemical company Eastman. Eastman is a global specialty chemicals company that manufactures chemicals, fibers and plastic materials that are found in products people use every day. Sustainability has become an essential component of Eastman’s business, they define sustainability as ‘the ability in creating value to all three aspect of the triple bottom line: environmental responsibility and stewardship, social responsibility, company’s economic growth’⁹. This section describes a case study performed within Eastman.

For Eastman it is possible two sell one of its products in different states: in a solid state and in a molten state. Figure 4 in Appendix I gives an overview of the two different flows that are needed

⁹ Eastman Chemical Company 2013. Science and Sustainability: Positive progress. http://www.eastman.com/Literature_Center/Misc/2013ProgressReport.pdf, p. 22, last accessed June 20, 2013

when selling this product in these two states. The process steps before the intermediate tank are similar for both states. After the intermediate tank the process is split into two different processes, where the upper flow refers to the solid state and the lower one refers to the molten state.

If sold at solid state to a customer, the product goes from the intermediate tank to the packout. At the packout the product is first pastillated then filled into bags, stored on pallets and finally the pallets are wrapped into shrink cover. After this the packaged product is loaded onto a regular truck and shipped to the customer. At the customers' site the product must be heated again in order to use it in the remaining processes.

If a customer orders molten, the product goes from the intermediate tank to a bulk tank where it is stored. When the tank truck arrives the product is loaded into a heated bulk container and shipped to the customer. During the trip from the firm to the customer the container of the truck is kept on a high temperature. At the customers' site the product is loaded into a bulk tank again and can immediately be used in the remaining processes. Note that packout, packaging, and re-heating processes are eliminated in this case, at the expense of keeping the product hot at all times, including transport.

For this product it is not possible for Eastman to make a decision only based on its own processes; the different states require not only different process steps at Eastman but also at the customer. Due to involvement of the customer Eastman not only has to exert effort internally but also externally. The internal efforts are actions that are taken related to the packaging process. A decision must be made whether to make pastilles (solid) of the product and fill bags with these pastilles or store it in a bulk tank. In addition, effort needs to be put in transport: the solid product can be shipped with a normal truck and the molten requires a dedicated truck that is heated. This can be internal effort or external effort, depending on the agreement made on terms of delivery. For Eastman, it is internal. The external effort is the effort that is related to actions that need to be taken in order to store the product at the customer. The product can be stored in a warehouse when the product is in solid state and must be stored in a heated bulk tank when the product is in molten state. Only emissions and costs from the point in time where the processes are different until the point in time where they are similar again must be taken into account. This means that F_f^j , F_t and F_f^e are within the boundary of this case study.

In this case, Eastman determined a specific budget for each action performed, i.e. the firm is willing to abate emissions as long as the corresponding costs do not exceed the budget. This means that the following minimization problem can be used:

$$\text{minimize } F_f^i + F_t + F_f^e \quad (1)$$

s. t.

$$C_f^i + C_t + C_f^e \leq \text{Budget}(\mathbf{e}_n^i, \mathbf{e}_n^e) \quad \forall n \in N \quad (2)$$

A more detailed overview of the model can be found in Appendix II. Figure 2 and 3 depict the carbon dioxide emissions and costs for the different processes described earlier. The percentage molten bulk (of the total sales of that product to the customer base) represents the “effort” level in the supply chain for greenification. In this case, both parties -Eastman and the customer(s)- need to exert effort. For example, both Eastman and its customer need to buy a bulk tank in order to store the molten product. Another effort of Eastman is to transport the molten product not in a regular tank but in a truck which has a dedicated tank that can be heated.

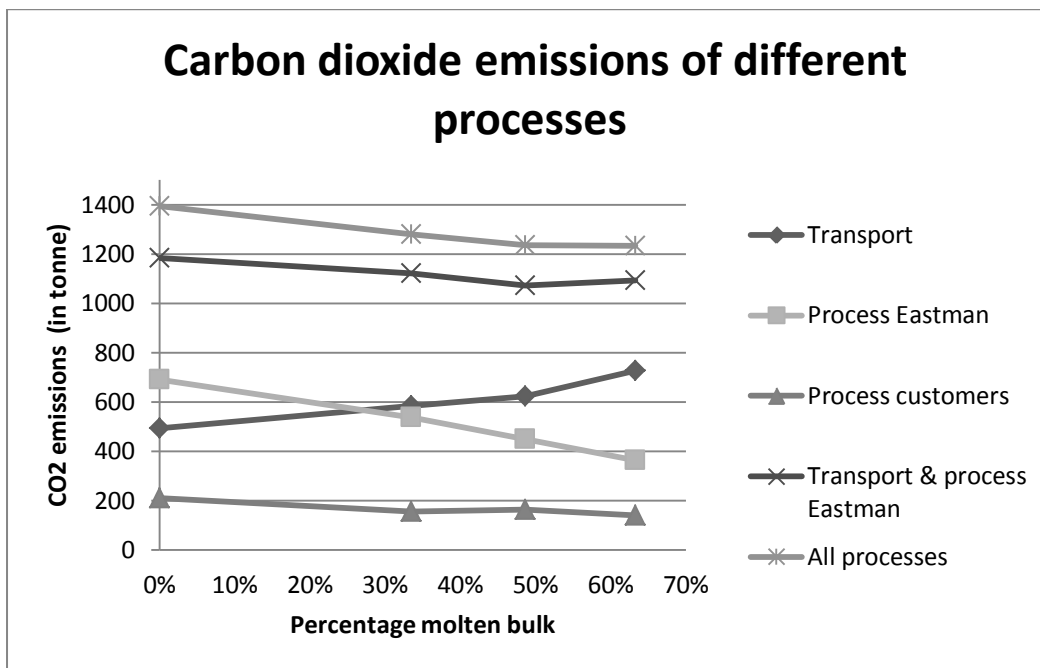


Figure 2 CO₂ emissions of different processes

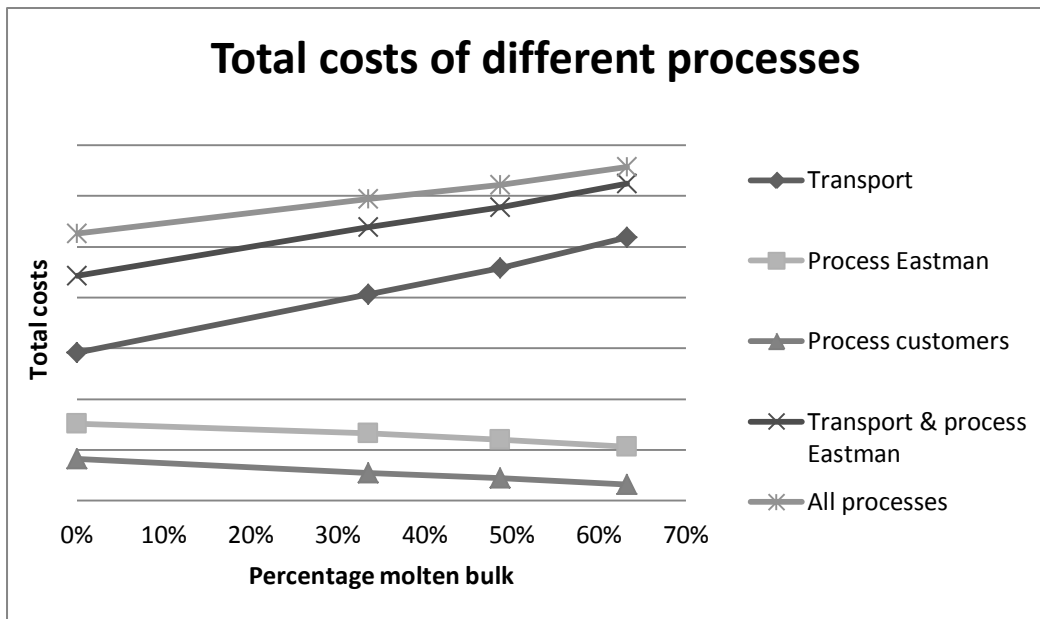


Figure 3 Total costs of different processes

Figures 2 and 3 show that the emissions and costs might be non-linear in effort level. This non-linearity has several causes. Increasing the molten volume means that a customer is added who originally bought the solid state and will buy the molten state instead. A first cause of the non-linearity is that the customers of Eastman are located in different European countries which means that for transport there are various distances that must be taken into account while calculating the transport emissions. In addition, the function to calculate the carbon dioxide emissions of the customer process is also non-linear. The explanation for this is twofold. First of all, the electricity generation in each country is different. For example, in France the primary source of electric power is nuclear power. Nuclear power is “cleaner” in terms of carbon emissions than electricity generation from fossil fuels - which is the primary source in the Netherlands. A second cause for the non-linearity is the size of the customers. Customers who have a large demand need larger tanks than customer with a small demand. This means that steam usage (and thus carbon dioxide emissions) per customer differs because the throughput time of the molten product in a tank (during which the product has to be kept hot) depends on the demand of the customer and is thus not the same for all customers.

This case study shows that it is important to define the right boundaries. When a firm defines myopic boundaries in an effort to abate carbon emissions, the decisions made might change when compared to a situation in which the impact of the supply chain is taken into account. For example, if Eastman is only considering the transport emissions F_t and costs C_t it will clearly prefer to sell solid material to its customer instead of selling molten, because carbon emissions are increasing when the percentage molten bulk increases. Shipping molten to a customer requires a special truck which can keep the

molten product on high temperature and because the heated truck consumes more fuel than a regular truck the emissions increase. Total costs also increase when more molten is sold because the heated truck is more expensive. Eastman could also have defined the system boundary to be the emissions emanating from the production process. When only process steps after production and before transportation are considered (F_f^i) it is better to sell more molten to customers in terms of carbon dioxide emissions and costs (Figures 2 and 3). This is due to the fact that the packaging steps and the packout result in more emissions and higher costs than keeping the product stored in the heated tank. Nevertheless, if Eastman considers the emissions emanating from all of its own processes ($F_f^i + F_t$), it can be seen in Figure 2 that there is a cut-off point. After 49% it is not beneficial in terms of CO₂ emissions to sell molten to customers, as the increase of transport emissions is more than the saving on process emissions. Finally, if all processes within the supply chain that are influenced by the molten versus solid product decision are taken into account, the product should be sold and transported at molten form. From a cost perspective it is never beneficial to sell molten to customers.

5 Conclusion

In this paper we have focused on answering the following question: How can firms take into account the dynamics of supply chain interactions when “greenifying” their operations? To answer this question a framework is introduced which firms can use in defining the right optimization problem and boundaries when they want to exert effort in decreasing their carbon footprint. We stress that a firm’s decision to greenify its operations might not only affect its own emissions but also other firms’ emissions. Our framework can help firms in determining which impact certain decisions have on the footprint of a product. The case study that we have considered illustrates that the decision making process highly depends on which boundaries a firm takes into account and therefore we conclude that defining the right boundaries is essential for making sustainability decisions in supply chains.

Our framework can be extended to a multi-product case, where the highest level scope definition would include all emissions from all products, and Level 2 scope definition would include only the footprint due to a particular product. We also note that our methodology can be applied to other GHG emissions, water footprint, and the like.

Acknowledgments

The authors thank Eastman Chemical Company for their collaboration and data sharing.

Bibliography

- Benjaafar, S., Li, Y., & Daskin, M. (2013). Carbon Footprint and the Management of Supply Chains: Insights from Simple Models. *Automation Science and Engineering*, 10(1), 99-116.
- Carbon Disclosure Project. (2012). *CDP Global 500 Climate Change Report*. CDP.
- Caro, F., Corbett, C. J., Tan, T., & Zuidwijk, R. (2013). Double-Counting of Emissions in Carbon-Neutral and Carbon-Optimal Supply Chains. *Manufacturing & Service Operations Management*, 15, 545–558.
- Corbett, C. J., & Klassen, R. D. (2006). Extending the Horizons: Environmental Excellence as Key to Improving Operations. *Manufacturing & Service Operations Management*, 8(1), 5-22.
- den Boer, L. C., Brouwer, F. P., & van Essen, H. P. (2008). *STREAM, Studie naar Transport Emissies van Alle Modaliteiten*. CE Delft.
- Hoen, K., Tan, T., Fransoo, J., & van Houtum, G. (2014). Effect of carbon emission regulations on transport mode selection under stochastic demand. *Flexible Services and Manufacturing*, 26, 170–195.
- Hua, G., Cheng, T., & Wang, S. (2011). Managing carbon footprints in inventory management. *International Journal of Production Economics*, 132(2), 178-185.
- Kleindorfer, P. R., Singhal, K., & van Wassenhove, L. N. (2005). Sustainable operations management. *Production and Operations Management*, 14(4), 248-492.
- NTM Air. (2008). *Environmental data for international cargo and passenger air transport*. NTM.
- NTM Road. (2008). *Environmental data for international cargo transport road transport*. NTM.
- Seuring, S., & Müller, M. (2008). From a literature review to a conceptual frame work for sustainable supply chain management. *Journal of Cleaner Production*, 16, 1699-1710.
- Srivastava, S. K. (2007). Green supply-chain management: A state-of-the-art literature review. *International Journal of Management Reviews*, 9(1), 53-80.
- The Carbon Trust. (2006). *Carbon footprints in the supply chain: the next step for business*. The Carbon Trust.
- Vachon, S., & Klassen, R. (2006). Extending green practices across the supply chain: the impact of upstream and downstream integration. *International journal of operations & production management*, 26(7), 795-821.
- Vachon, S., & Klassen, R. (2008). Environmental management and manufacturing performance: The role of collaboration in the supply chain. *International journal of production economics*, 299-315.

van den Akker, I., te Loo, R., Ozsalih, H., & Schers, R. (2009). *CRSC-Carbon regulated supply chains: carbon dioxide calculation method and insights based on three case studies*. Eindhoven University of Technology.

Appendix I

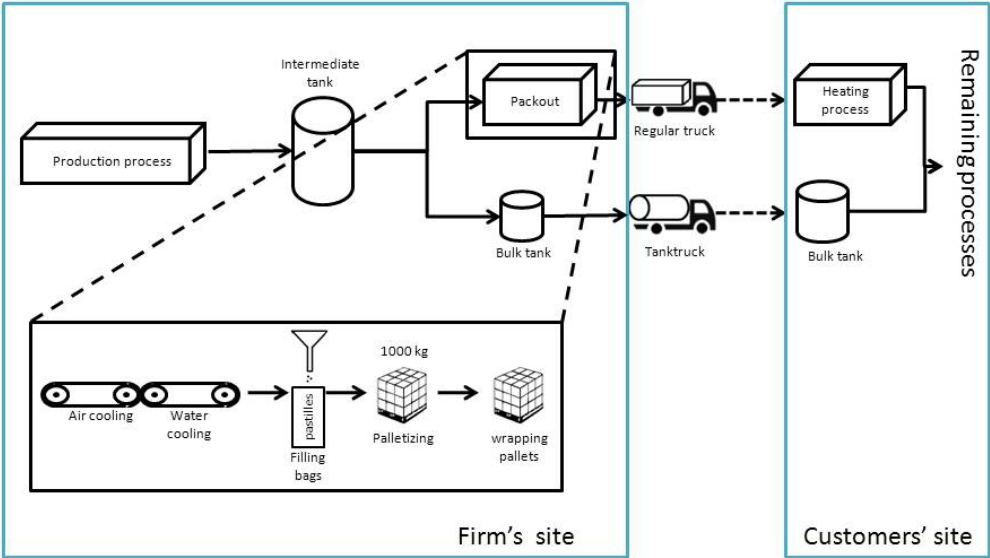


Figure 4 Process flow

Appendix II

The minimization problem of Section 3 can be rewritten as:

$$\text{minimize } F_f^i + F_t + F_f^e = F_{po}^i + F_{pm}^i + F_h^e + F_{mt}^i + F_{mt}^e + F_e^i + F_e^e + F_t \quad (3)$$

s. t.

$$C_{po}^i + C_{pm}^i + C_{mt}^i + C_{mt}^e + C_i^i + C_i^e + C_h^e + C_l^e + C_t \leq \text{Budget}(\mathbf{e}_n^i, \mathbf{e}_n^e) \quad \forall n \in N \quad (4)$$

Equation 3

In the equation above F_{po}^i represents the emissions from the packout. At the packout the product is first pastillated, then filled into bags, stored on pallets and finally the pallets are wrapped into shrink cover. The electricity usage of the packout was calculated in order to calculate the carbon dioxide emissions of the packout. For each engine in the packout the actual used capacity (in kW) was determined by the capacity (in kW), the efficiency of the engine and the allocation factor. This allocation factor was needed because some engines are also used in other processes. Finally, the amount of carbon dioxide emitted by the packout was calculated by multiplying the total energy usage with the electricity emission factor of country where the packout is located.

When selling the solid state, Eastman must also use packing material. F_{pm}^i represents the carbon dioxide emissions that are emitted due to the packaging material that Eastman uses. A Life Cycle Assessment (LCA) is conducted for the packaging material. In this case study, the emission factors until the gate of the packaging material suppliers were sourced from the database of the LCA software tool GaBi. The total CO₂ emissions until the gate of the suppliers are obtained when these emission factors are multiplied with the total packaging material used. The transport CO₂ emissions were calculated from the gate of the suppliers till Eastman's gate by using the NTM methodology (see next section for further explanation). Also the end-of-life was taken into account within the LCA. It is assumed that the materials will not be recycled and from the database of Eurostat¹⁰ it is obtained that in Europe on average 34.69% of industrial waste is incinerated and 65.31% will end up in a landfill. The carbon dioxide emitted due to the end of life of a product was calculated by multiplying the total demand in kg with the emissions factor of the disposal treatment used.

The emissions from the heating process at the customer are F_h^e . The amount of energy required to raise one kilogram of product by 1 degree must be calculated in order to calculate the total energy usage and total carbon dioxide emissions of this process. The required energy for the heating process (in kJ/kg) can be calculated with $Q_h = m * c * \Delta t$, where m = total mass of products (in kg), c = specific

¹⁰ Eurostat database. <http://epp.eurostat.ec.europa.eu/portal/page/portal/eurostat/home>, last accessed June 26, 2013

heat capacity (in kJ/kg/°C)=2.1 kJ/kg/°C and Δt = change in temperature (in °C). The carbon dioxide emissions were obtained when multiplying the total required energy with the right electricity emissions factor.

In order to sell the molten state to customers, both Eastman and its customers must have a molten bulk tank in which they can store the product and keep it on a high temperature. These bulk tanks are kept on temperature by steam. In equation (3), F_{mt}^i and F_{mt}^e represent the CO₂ emissions from steam use of a bulk tank at Eastman and its customer.

In addition, the molten bulk tanks also use electricity to mix the molten product with a stirring device and to load and unload the bulk tanks. The emissions from electricity use of the bulk tank are represented by F_e^i and F_e^e . These emissions were obtained by calculating the energy usage of the stirring device and the pump that is used for (un)loading and multiplying these with the right electricity emission factors.

F_t represents the emissions resulting from transport. There are several methodologies available to calculate transport emissions. Examples of methodologies are: Greenhouse Gas (GHG) protocol Artemis, EcoTransIT, NTM and STREAM. An overview of the characteristics per methodology is given in table 2. In this case study the carbon dioxide emissions resulting from transport are calculated with the NTM methodology. This method was chosen because it is focused on Europe, it has a high level of detail, it can calculate the emissions at various levels of detail, it offers the possibility of modifying or adding parameters and NTM is cooperating with the European Committee for Standardization to set a standard for calculating emissions resulting from transport, NTM (2011).

Table 2 Overview transport emissions calculation methodologies (obtained from van den Akker et al. (2009))

Method	Background	Scope	Level of Detail
Artemis ¹¹	Well defined	Europe	Very high
EcoTransIT ¹²	Well defined	Europe (excluding some countries)	Medium
GHG Protocol ¹³	Well defined	World, focus on US	Low
NTM ¹⁴	Well defined	Europe	High
STREAM (den Boer et al. (2008))	Well defined	The Netherlands	Medium

¹¹ ARTEMIS. <http://www.trl.co.uk/artemis>, last accessed June 26, 2013

¹² ECOTransIT. 2011. <http://www.ecotransit.org>, last accessed June 26, 2013

¹³ Greenhouse Gas Protocol. 2011. <http://www.ghgprotocol.org>, last accessed June 26, 2013

¹⁴ NTM. 2011. NTM Calc. <http://www.ntmcalc.se/index.html>, last accessed June 26, 2013

In this case study the carbon dioxide emissions from two types of road transport was calculated; road transport with a regular container and road transport with a heated container. All details to calculate the carbon dioxide emissions from road transport are taken from NTM Road (2008) and van den Akker (2009). For road transport the carbon dioxide emissions depend on the fuel consumption (FC_{LF}). The fuel consumption for a truck that has a regular container can be calculated as follows:

$$FC_{LF} = FC_{empty} + (FC_{full} - FC_{empty}) * LF$$

Where FC_{LF} = Fuel consumption at the specified load factor (liters per kilometre), FC_{empty} = Fuel consumption of the empty vehicle (liters per kilometre), FC_{full} = Fuel consumption of the fully loaded vehicle (liters per kilometre), LF = Specified load factor.

For the molten product a truck with a heated container is used. This heated container uses more fuel which changes the previous formula into:

$$FC_{LF} = FC_{empty} + ((FC_{full} * (1 + x) - FC_{empty})) * LF ,$$

where x represents the increase in fuel consumption when the container is heating the full container. Finally, the total carbon dioxide emitted can be calculated by

$$TE = FC_{LF} * D * FC_{CO_2}$$

where TE =Total carbon dioxide emission, D = distance in km, FC_{CO_2} = Emission factor for fuel

Equation 4

In equation (4) the costs regarding the electricity cost for the packout are C_{po}^i , and C_{pm}^i represents the packaging material costs. The costs to keep a molten bulk tank up and running are C_{mt}^i and C_{mt}^e . The inventory holding costs of internal and external location are C_i^i and C_i^e , respectively. C_h^e represents the electricity costs of the heating process and C_l^e are the labour costs when bags need to be cut at the customer. The costs regarding transport are depicted by C_t .

Working Papers Beta 2009 - 2014

nr.	Year	Title	Author(s)
467		Where to exert abatement effort for sustainable operations considering supply chain interactions?	Tarkan Tan, Astrid Koomen
466	2014	An Exact Algorithm for the Vehicle Routing Problem with Time Windows and Shifts	Said Dabia, Stefan Ropke, Tom Van Woensel
465	2014	The RePro technique: a new, systematic technique for rethinking care processes	Rob J.B. Vanwersch, Luise Pufahl, Irene Vanderfeesten, Hajo A. Reijers
464	2014	Exploring maintenance policy selection using the Analytic Hierarchy Process; an application for naval ships	A.J.M. Goossens, R.J.I. Basten
463	2014	Allocating service parts in two-echelon networks at a utility company	D. van den Berg, M.C. van der Heijden, P.C. Schuur
462	2014	Freight consolidation in networks with transshipments	W.J.A. van Heeswijk, M.R.K. Mes, J.M.J. Schutten, W.H.M. Zijm
461	2014	A Software Architecture for a Transportation Control Tower	Anne Baumgrass, Remco Dijkman, Paul Grefen, Shaya Pourmirza, Hagen Völzer, Mathias Weske
460	2014	Small traditional retailers in emerging markets	Youssef Boulaksil, Jan C. Fransoo, Edgar E. Blanco, Sallem Koubida
459	2014	Defining line replaceable units	J.E. Parada Puig, R.J.I. Basten
458	2014	Inventories and the Credit Crisis: A Chicken and Egg Situation	Maximiliano Udenio, Vishal Gaur, Jan C. Fransoo
457	2014	An Exact Approach for the Pollution-Routing Problem	Said Dabia, Emrah Demir, Tom Van Woensel
456	2014	Fleet readiness: stocking spare parts and high-tech assets	Rob J.I. Basten, Joachim J. Arts
455	2014	Competitive Solutions for Cooperating Logistics Providers	Behzad Hezarkhani, Marco Slikker, Tom Van Woensel
454	2014	Simulation Framework to Analyse Operating Room Release Mechanisms	Rimmert van der Kooij, Martijn Mes, Erwin Hans

453	2014	A Unified Race Algorithm for Offline Parameter Tuning	Tim van Dijk, Martijn Mes, Marco Schutten, Joaquim Gromicho
452	2014	Cost, carbon emissions and modal shift in intermodal network design decisions	Yann Bouchery, Jan Fransoo
451	2014	Transportation Cost and CO2 Emissions in Location Decision Models	Josue C. Vélazquez-Martínez, Jan C. Fransoo, Edgar E. Blanco, Jaime Mora-Vargas
450	2014	Tracebook: A Dynamic Checklist Support System	Shan Nan, Pieter Van Gorp, Hendrikus H.M. Korsten, Richard Vdovjak, Uzay Kaymak
449	2014	Intermodal hinterland network design with multiple actors	Yann Bouchery, Jan Fransoo
448	2014	The Share-a-Ride Problem: People and Parcels Sharing Taxis	Baoxiang Li, Dmitry Krushinsky, Hajo A. Reijers, Tom Van Woensel
447	2014	Stochastic inventory models for a single item at a single location	K.H. van Donselaar, R.A.C.M. Broekmeulen
446	2014	Optimal and heuristic repairable stocking and expediting in a fluctuating demand environment	Joachim Arts, Rob Basten, Geert-Jan van Houtum
445	2014	Connecting inventory control and repair shop control: a differentiated control structure for repairable spare parts	M.A. Driessen, W.D. Rustenburg, G.J. van Houtum, V.C.S. Wiers
444	2014	A survey on design and usage of Software Reference Architectures	Samuil Angelov, Jos Trienekens, Rob Kusters
443	2014	Extending and Adapting the Architecture Tradeoff Analysis Method for the Evaluation of Software Reference Architectures	Samuil Angelov, Jos J.M. Trienekens, Paul Grefen
442	2014	A multimodal network flow problem with product Quality preservation, transshipment, and asset management	Maryam SteadieSeifi, Nico Dellaert, Tom Van Woensel
441	2013	Integrating passenger and freight transportation: Model formulation and insights	Veaceslav Ghilas, Emrah Demir, Tom Van Woensel

440	2013	The Price of Payment Delay	K. van der Vliet, M.J. Reindorp, J.C. Fransoo
439	2013	On Characterization of the Core of Lane Covering Games via Dual Solutions	Behzad Hezarkhani, Marco Slikker, Tom van Woensel
438	2013	Destocking, the Bullwhip Effect, and the Credit Crisis: Empirical Modeling of Supply Chain Dynamics	Maximiliano Udenio, Jan C. Fransoo, Robert Peels
437	2013	Methodological support for business process Redesign in healthcare: a systematic literature review	Rob J.B. Vanwersch, Khurram Shahzad, Irene Vanderfeesten, Kris Vanhaecht, Paul Grefen, Liliane Pintelon, Jan Mendling, Geofridus G. Van Merode, Hajo A. Reijers
436	2013	Dynamics and equilibria under incremental Horizontal differentiation on the Salop circle	B. Vermeulen, J.A. La Poutré, A.G. de Kok
435	2013	Analyzing Conformance to Clinical Protocols Involving Advanced Synchronizations	Hui Yan, Pieter Van Gorp, Uzay Kaymak, Xudong Lu, Richard Vdovjak, Hendriks H.M. Korsten, Huilong Duan
434	2013	Models for Ambulance Planning on the Strategic and the Tactical Level	J. Theresia van Essen, Johann L. Hurink, Stefan Nickel, Melanie Reuter
433	2013	Mode Allocation and Scheduling of Inland Container Transportation: A Case-Study in the Netherlands	Stefano Fazi, Tom Van Woensel, Jan C. Fransoo
432	2013	Socially responsible transportation and lot sizing: Insights from multiobjective optimization	Yann Bouchery, Asma Ghaffari, Zied Jemai, Jan Fransoo
431	2013	Inventory routing for dynamic waste collection	Martijn Mes, Marco Schutten, Arturo Pérez Rivera
430	2013	Simulation and Logistics Optimization of an Integrated Emergency Post	N.J. Borgman, M.R.K. Mes, I.M.H. Vliegen, E.W. Hans
429	2013	Last Time Buy and Repair Decisions for Spare Parts	S. Behfard, M.C. van der Heijden, A. Al Hanbali, W.H.M. Zijm

428	2013	A Review of Recent Research on Green Road Freight Transportation	Emrah Demir, Tolga Bektas, Gilbert Laporte
427	2013	Typology of Repair Shops for Maintenance Spare Parts	M.A. Driessen, V.C.S. Wiers, G.J. van Houtum, W.D. Rustenburg
426	2013	A value network development model and Implications for innovation and production network management	B. Vermeulen, A.G. de Kok
425	2013	Single Vehicle Routing with Stochastic Demands: Approximate Dynamic Programming	C. Zhang, N.P. Dellaert, L. Zhao, T. Van Woensel, D. Sever
424	2013	Influence of Spillback Effect on Dynamic Shortest Path Problems with Travel-Time-Dependent Network Disruptions	Derya Sever, Nico Dellaert, Tom Van Woensel, Ton de Kok
423	2013	Dynamic Shortest Path Problem with Travel-Time-Dependent Stochastic Disruptions: Hybrid Approximate Dynamic Programming Algorithms with a Clustering Approach	Derya Sever, Lei Zhao, Nico Dellaert, Tom Van Woensel, Ton de Kok
422	2013	System-oriented inventory models for spare parts	R.J.I. Basten, G.J. van Houtum
421	2013	Lost Sales Inventory Models with Batch Ordering And Handling Costs	T. Van Woensel, N. Erkip, A. Curseu, J.C. Fransoo
420	2013	Response speed and the bullwhip	Maximiliano Udenio, Jan C. Fransoo, Eleni Vatamidou, Nico Dellaert
419	2013	Anticipatory Routing of Police Helicopters	Rick van Urk, Martijn R.K. Mes, Erwin W. Hans
418	2013	Supply Chain Finance: research challenges ahead	Kasper van der Vliet, Matthew J. Reindorp, Jan C. Fransoo
417	2013	Improving the Performance of Sorter Systems By Scheduling Inbound Containers	S.W.A. Haneyah, J.M.J. Schutten, K. Fikse

416	2013	Regional logistics land allocation policies: Stimulating spatial concentration of logistics firms	Frank P. van den Heuvel, Peter W. de Langen, Karel H. van Donselaar, Jan C. Fransoo
415	2013	The development of measures of process harmonization	Heidi L. Romero, Remco M. Dijkman, Paul W.P.J. Grefen, Arjan van Weele
414	2013	BASE/X. Business Agility through Cross-Organizational Service Engineering	Paul Grefen, Egon Lüftenegger, Eric van der Linden, Caren Weisleder
413	2013	The Time-Dependent Vehicle Routing Problem with Soft Time Windows and Stochastic Travel Times	Duygu Tas, Nico Dellaert, Tom van Woensel, Ton de Kok
412	2013	Clearing the Sky - Understanding SLA Elements in Cloud Computing	Marco Comuzzi, Guus Jacobs, Paul Grefen
411	2013	Approximations for the waiting time distribution In an M/G/c priority queue	A. Al Hanbali, E.M. Alvarez, M.C. van der van der Heijden
410	2013	To co-locate or not? Location decisions and logistics concentration areas	Frank P. van den Heuvel, Karel H. van Donselaar, Rob A.C.M. Broekmeulen, Jan C. Fransoo, Peter W. de Langen
409	2013	The Time-Dependent Pollution-Routing Problem	Anna Franceschetti, Dorothee Honhon, Tom van Woensel, Tolga Bektas, Gilbert Laporte.
408	2013	Scheduling the scheduling task: A time Management perspective on scheduling	J.A. Larco, V. Wiers, J. Fransoo
407	2013	Clustering Clinical Departments for Wards to Achieve a Prespecified Blocking Probability	J. Theresia van Essen, Mark van Houdenhoven, Johann L. Hurink
406	2013	MyPHRMachines: Personal Health Desktops in the Cloud	Pieter Van Gorp, Marco Comuzzi
405	2013	Maximising the Value of Supply Chain Finance	Kasper van der Vliet, Matthew J. Reindorp, Jan C. Fransoo
404	2013	Reaching 50 million nanostores: retail distribution in emerging megacities	Edgar E. Blanco, Jan C. Fransoo

403	2013	A Vehicle Routing Problem with Flexible Time Windows	Duygu Tas, Ola Jabali, Tom van Woensel
402	2012	The Service Dominant Business Model: A Service Focused Conceptualization	Egon Lüftenegger, Marco Comuzzi, Paul Grefen, Caren Weisleder
401	2012	Relationship between freight accessibility and Logistics employment in US counties	Frank P. van den Heuvel, Liliana Rivera, Karel H. van Donselaar, Ad de Jong, Yossi Sheffi, Peter W. de Langen, Jan C. Fransoo
400	2012	A Condition-Based Maintenance Policy for Multi-Component Systems with a High Maintenance Setup Cost	Qiushi Zhu, Hao Peng, Geert-Jan van Houtum
399	2012	A flexible iterative improvement heuristic to Support creation of feasible shift rosters in Self-rostering	E. van der Veen, J.L. Hurink, J.M.J. Schutten, S.T. Uijland
398	2012	Scheduled Service Network Design with Synchronization and Transshipment Constraints For Intermodal Container Transportation Networks	K. Sharypova, T.G. Crainic, T. van Woensel, J.C. Fransoo
397	2012	Destocking, the bullwhip effect, and the credit Crisis: empirical modeling of supply chain Dynamics	Maximiliano Udenio, Jan C. Fransoo, Robert Peels
396	2012	Vehicle routing with restricted loading capacities	J. Gromicho, J.J. van Hoorn, A.L. Kok, J.M.J. Schutten
395	2012	Service differentiation through selective lateral transshipments	E.M. Alvarez, M.C. van der Heijden, I.M.H. Vliegen, W.H.M. Zijm
394	2012	A Generalized Simulation Model of an Integrated Emergency Post	Martijn Mes, Manon Bruens

393 2012	<u>Business Process Technology and the Cloud: Defining a Business Process Cloud Platform</u>	Vasil Stoitsev, Paul Grefen
392 2012	<u>Vehicle Routing with Soft Time Windows and Stochastic Travel Times: A Column Generation And Branch-and-Price Solution Approach</u>	D. Tas, M. Gendreau, N. Dellaert, T. van Woensel, A.G. de Kok
391 2012	<u>Improve OR-Schedule to Reduce Number of Required Beds</u>	J.T. v. Essen, J.M. Bosch, E.W. Hans, M. v. Houdenhoven, J.L. Hurink
390 2012	<u>How does development lead time affect performance over the ramp-up lifecycle?</u>	Andres Pufall, Jan C. Fransoo, Ad de Jong
389 2012	<u>Evidence from the consumer electronics industry</u>	Andreas Pufall, Jan C. Fransoo, Ad de Jong, Ton de Kok
388 2012	<u>The Impact of Product Complexity on Ramp-Up Performance</u>	Frank P.v.d. Heuvel, Peter W.de Langen, Karel H. v. Donselaar, Jan C. Fransoo
387 2012	<u>Co-location synergies: specialized versus diverse logistics concentration areas</u>	Frank P.v.d. Heuvel, Peter W.de Langen, Karel H. v.Donselaar, Jan C. Fransoo
386 2012	<u>Proximity matters: Synergies through co-location of logistics establishments</u>	Frank P. v.d.Heuvel, Peter W.de Langen, Karel H.v. Donselaar, Jan C. Fransoo
385 2012	<u>Spatial concentration and location dynamics in logistics:the case of a Dutch province</u>	Zhiqiang Yan, Remco Dijkman, Paul Grefen
384 2012	<u>FNet: An Index for Advanced Business Process Querying</u>	W.R. Dalinghaus, P.M.E. Van Gorp
383 2012	<u>Defining Various Pathway Terms</u>	Egon Lüftenegger, Paul Grefen, Caren Weisleder
	<u>The Service Dominant Strategy Canvas:</u>	

382	2012	Defining and Visualizing a Service Dominant Strategy through the Traditional Strategic Lens	Stefano Fazi, Tom van Woensel, Jan C. Fransoo
381	2012	A Stochastic Variable Size Bin Packing Problem With Time Constraints	K. Sharypova, T. van Woensel, J.C. Fransoo
380	2012	Coordination and Analysis of Barge Container Hinterland Networks	Frank P. van den Heuvel, Peter W. de Langen, Karel H. van Donselaar, Jan C. Fransoo
379	2012	Proximity matters: Synergies through co-location of logistics establishments	Heidi Romero, Remco Dijkman, Paul Grefen, Arjan van Weele
378	2012	A literature review in process harmonization: a conceptual framework	S.W.A. Haneya, J.M.J. Schutten, P.C. Schuur, W.H.M. Zijm
377	2012	A Generic Material Flow Control Model for Two Different Industries	H.G.H. Tiemessen, M. Fleischmann, G.J. van Houtum, J.A.E.E. van Nunen, E. Pratsini
375	2012	Improving the performance of sorter systems by scheduling inbound containers	Albert Douma, Martijn Mes
374	2012	Strategies for dynamic appointment making by container terminals	Pieter van Gorp, Marco Comuzzi
373	2012	MyPHRMachines: Lifelong Personal Health Records in the Cloud	E.M. Alvarez, M.C. van der Heijden, W.H.M. Zijm
372	2012	Service differentiation in spare parts supply through dedicated stocks	Frank Karsten, Rob Basten
371	2012	Spare parts inventory pooling: how to share the benefits	X.Lin, R.J.I. Basten, A.A. Kranenburg, G.J. van Houtum
370	2012	Condition based spare parts supply	Martijn Mes
		Using Simulation to Assess the Opportunities of	

	<u>Dynamic Waste Collection</u>	
369	2011	J. Arts, S.D. Flapper, K. Vernooij
	<u>Aggregate overhaul and supply chain planning for rotables</u>	
368	2011	J.T. van Essen, J.L. Hurink, W. Hartholt, B.J. van den Akker
	<u>Operating Room Rescheduling</u>	
367	2011	
	<u>Switching Transport Modes to Meet Voluntary Carbon Emission Targets</u>	
366	2011	Kristel M.R. Hoen, Tarkan Tan, Jan C. Fransoo, Geert-Jan van Houtum
	<u>On two-echelon inventory systems with Poisson demand and lost sales</u>	
365	2011	Elisa Alvarez, Matthieu van der Heijden
	<u>Minimizing the Waiting Time for Emergency Surgery</u>	
364	2011	J.T. van Essen, E.W. Hans, J.L. Hurink, A. Oversberg
	<u>Vehicle Routing Problem with Stochastic Travel Times Including Soft Time Windows and Service Costs</u>	
363	2011	Duygu Tas, Nico Dellaert, Tom van Woensel, Ton de Kok
	<u>A New Approximate Evaluation Method for Two-Echelon Inventory Systems with Emergency Shipments</u>	
362	2011	Erhun Özkan, Geert-Jan van Houtum, Yasemin Serin
	<u>Approximating Multi-Objective Time-Dependent Optimization Problems</u>	
361	2011	Said Dabia, El-Ghazali Talbi, Tom Van Woensel, Ton de Kok
	<u>Branch and Cut and Price for the Time Dependent Vehicle Routing Problem with Time Window</u>	
360	2011	Said Dabia, Stefan Röpke, Tom Van Woensel, Ton de Kok
	<u>Analysis of an Assemble-to-Order System with Different Review Periods</u>	
359	2011	A.G. Karaarslan, G.P. Kiesmüller, A.G. de Kok
	<u>Interval Availability Analysis of a Two-Echelon, Multi-Item System</u>	
358	2011	Ahmad Al Hanbali, Matthieu van der Heijden
	<u>Carbon-Optimal and Carbon-Neutral Supply Chains</u>	
357	2011	Felipe Caro, Charles J. Corbett, Tarkan Tan, Rob Zuidwijk
	<u>Generic Planning and Control of Automated Material Handling Systems: Practical Requirements Versus Existing Theory</u>	
356	2011	Sameh Haneyah, Henk Zijm, Marco Schutten, Peter Schuur
		M. van der Heijden, B. Iskandar

355	2011	Last time buy decisions for products sold under warranty	Frank P. van den Heuvel, Peter W. de Langen, Karel H. van Donselaar, Jan C. Fransoo
354	2011	Spatial concentration and location dynamics in logistics: the case of a Dutch province	Frank P. van den Heuvel, Peter W. de Langen, Karel H. van Donselaar, Jan C. Fransoo
353	2011	Identification of Employment Concentration Areas	Pieter van Gorp, Remco Dijkman
352	2011	BOMN 2.0 Execution Semantics Formalized as Graph Rewrite Rules: extended version	Frank Karsten, Marco Slikker, Geert-Jan van Houtum
351	2011	Resource pooling and cost allocation among independent service providers	E. Lüftenegger, S. Angelov, P. Grefen
350	2011	A Framework for Business Innovation Directions	Remco Dijkman, Irene Vanderfeesten, Hajo A. Reijers
349	2011	The Road to a Business Process Architecture: An Overview of Approaches and their Use	K.M.R. Hoen, T. Tan, J.C. Fransoo G.J. van Houtum
348	2011	Effect of carbon emission regulations on transport mode selection under stochastic demand	Murat Firat, Cor Hurkens
347	2011	An improved MIP-based combinatorial approach for a multi-skill workforce scheduling problem	R.J.I. Basten, M.C. van der Heijden, J.M.J. Schutten
346	2011	An approximate approach for the joint problem of level of repair analysis and spare parts stocking	R.J.I. Basten, M.C. van der Heijden, J.M.J. Schutten
345	2011	Joint optimization of level of repair analysis and spare parts stocks	Ton G. de Kok
344	2011	Inventory control with manufacturing lead time flexibility	Frank Karsten, Marco Slikker, Geert-Jan van Houtum
343	2011	Analysis of resource pooling games via a new extension of the Erlang loss function	Murat Firat, C.A.J. Hurkens, Gerhard J. Woeginger
342	2010	Vehicle refueling with limited resources Optimal Inventory Policies with Non-stationary Supply Disruptions and Advance Supply	Bilge Atasoy, Refik Güllü, TarkanTan

<u>Information</u>		
341	2010	Redundancy Optimization for Critical Components in High-Availability Capital Goods Kurtulus Baris Öner, Alan Scheller-Wolf Geert-Jan van Houtum
339	2010	Joachim Arts, Gudrun Kiesmüller
338	2010	Analysis of a two-echelon inventory system with two supply modes Murat Firat, Gerhard J. Woeginger
335	2010	Analysis of the dial-a-ride problem of Hunsaker and Savelsbergh Murat Firat, Cor Hurkens
334	2010	Attaining stability in multi-skill workforce scheduling A.J.M.M. Weijters, J.T.S. Ribeiro
333	2010	Flexible Heuristics Miner (FHM) P.T. Vanberkel, R.J. Boucherie, E.W. Hans, J.L. Hurink, W.A.M. van Lent, W.H. van Harten
332	2010	An exact approach for relating recovering surgical patient workload to the master surgical schedule Peter T. Vanberkel, Richard J. Boucherie, Erwin W. Hans, Johann L. Hurink, Nelly Litvak
331	2010	Efficiency evaluation for pooling resources in health care M.M. Jansen, A.G. de Kok, I.J.B.F. Adan
330	2010	The Effect of Workload Constraints in Mathematical Programming Models for Production Planning Christian Howard, Ingrid Reijnen, Johan Marklund, Tarkan Tan
329	2010	Using pipeline information in a multi-echelon spare parts inventory system H.G.H. Tiemessen, G.J. van Houtum
328	2010	Reducing costs of repairable spare parts supply systems via dynamic scheduling F.P. van den Heuvel, P.W. de Langen, K.H. van Donselaar, J.C. Fransoo
327	2010	Identification of Employment Concentration and Specialization Areas: Theory and Application Murat Firat, Cor Hurkens
326	2010	A combinatorial approach to multi-skill workforce scheduling Murat Firat, Cor Hurkens, Alexandre Laugier
		Stability in multi-skill workforce scheduling

325	2010		M.A. Driessen, J.J. Arts, G.J. v. Houtum, W.D. Rustenburg, B. Huisman
		Maintenance spare parts planning and control: A framework for control and agenda for future research	
324	2010		R.J.I. Basten, G.J. van Houtum
		Near-optimal heuristics to set base stock levels in a two-echelon distribution network	
323	2010		M.C. van der Heijden, E.M. Alvarez, J.M.J. Schutten
		Inventory reduction in spare part networks by selective throughput time reduction	
322	2010		E.M. Alvarez, M.C. van der Heijden, W.H. Zijm
		The selective use of emergency shipments for service-contract differentiation	
321	2010		B. Walrave, K. v. Oorschot, A.G.L. Romme
		Heuristics for Multi-Item Two-Echelon Spare Parts Inventory Control Problem with Batch Ordering in the Central Warehouse	
320	2010		Nico Dellaert, Jully Jeunet.
		Preventing or escaping the suppression mechanism: intervention conditions	
319	2010	Hospital admission planning to optimize major resources utilization under uncertainty	R. Seguel, R. Eshuis, P. Grefen.
318	2010	Minimal Protocol Adaptors for Interacting Services	Tom Van Woensel, Marshall L. Fisher, Jan C. Fransoo.
317	2010	Teaching Retail Operations in Business and Engineering Schools	Lydie P.M. Smets, Geert-Jan van Houtum, Fred Langerak.
316	2010	Design for Availability: Creating Value for Manufacturers and Customers	Pieter van Gorp, Rik Eshuis.
315	2010	Transforming Process Models: executable rewrite rules versus a formalized Java program	Bob Walrave, Kim E. van Oorschot, A. Georges L. Romme
314	2010	Getting trapped in the suppression of exploration: A simulation model	S. Dabia, T. van Woensel, A.G. de Kok
313		A Dynamic Programming Approach to Multi-Objective Time-Dependent Capacitated Single Vehicle Routing Problems with Time Windows	
312	2010	Tales of a So(u)rcerer: Optimal Sourcing Decisions Under Alternative Capacitated Suppliers and General Cost Structures	Osman Alp, Tarkan Tan

311	2010	In-store replenishment procedures for perishable inventory in a retail environment with handling costs and storage constraints	R.A.C.M. Broekmeulen, C.H.M. Bakx
310	2010	The state of the art of innovation-driven business models in the financial services industry	E. Lüftenegger, S. Angelov, E. van der Linden, P. Grefen
309	2010	Design of Complex Architectures Using a Three Dimension Approach: the CrossWork Case	R. Seguel, P. Grefen, R. Eshuis
308	2010	Effect of carbon emission regulations on transport mode selection in supply chains	K.M.R. Hoen, T. Tan, J.C. Fransoo, G.J. van Houtum
307	2010	Interaction between intelligent agent strategies for real-time transportation planning	Martijn Mes, Matthieu van der Heijden, Peter Schuur
306	2010	Internal Slackening Scoring Methods	Marco Slikker, Peter Borm, René van den Brink
305	2010	Vehicle Routing with Traffic Congestion and Drivers' Driving and Working Rules	A.L. Kok, E.W. Hans, J.M.J. Schutten, W.H.M. Zijm
304	2010	Practical extensions to the level of repair analysis	R.J.I. Basten, M.C. van der Heijden, J.M.J. Schutten
303	2010	Ocean Container Transport: An Underestimated and Critical Link in Global Supply Chain Performance	Jan C. Fransoo, Chung-Yee Lee
302	2010	Capacity reservation and utilization for a manufacturer with uncertain capacity and demand	Y. Boulaksil; J.C. Fransoo; T. Tan
300	2009	Spare parts inventory pooling games	F.J.P. Karsten; M. Slikker; G.J. van Houtum
299	2009	Capacity flexibility allocation in an outsourced supply chain with reservation	Y. Boulaksil, M. Grunow, J.C. Fransoo
298	2010	An optimal approach for the joint problem of level of repair analysis and spare parts stocking	R.J.I. Basten, M.C. van der Heijden, J.M.J. Schutten
297	2009	Responding to the Lehman Wave: Sales Forecasting and Supply Management during the Credit Crisis	Robert Peels, Maximiliano Udenio, Jan C. Fransoo, Marcel Wolfs, Tom Hendrixx
296	2009	An exact approach for relating recovering surgical patient workload to the master surgical schedule	Peter T. Vanberkel, Richard J. Boucherie, Erwin W. Hans, Johann L. Hurink, Wineke A.M. van Lent, Wim H. van Harten
295	2009	An iterative method for the simultaneous optimization of repair decisions and spare parts stocks	R.J.I. Basten, M.C. van der Heijden, J.M.J. Schutten
294	2009	Fujaba hits the Wall(-e)	Pieter van Gorp, Ruben Jubeh, Bernhard Grusie, Anne Keller
293	2009	Implementation of a Healthcare Process in Four Different Workflow Systems	R.S. Mans, W.M.P. van der Aalst, N.C. Russell, P.J.M. Bakker
292	2009	Business Process Model Repositories - Framework and Survey	Zhiqiang Yan, Remco Dijkman, Paul Grefen
291	2009	Efficient Optimization of the Dual-Index Policy Using Markov Chains	Joachim Arts, Marcel van Vuuren, Gudrun Kiesmuller

290	2009	Hierarchical Knowledge-Gradient for Sequential Sampling	Martijn R.K. Mes; Warren B. Powell; Peter I. Frazier
289	2009	Analyzing combined vehicle routing and break scheduling from a distributed decision making perspective	C.M. Meyer; A.L. Kok; H. Kopfer; J.M.J. Schutten
288	2009	Anticipation of lead time performance in Supply Chain Operations Planning	Michiel Jansen; Ton G. de Kok; Jan C. Fransoo
287	2009	Inventory Models with Lateral Transshipments: A Review	Colin Paterson; Gudrun Kiesmuller; Ruud Teunter; Kevin Glazebrook
286	2009	Efficiency evaluation for pooling resources in health care	P.T. Vanberkel; R.J. Boucherie; E.W. Hans; J.L. Hurink; N. Litvak
285	2009	A Survey of Health Care Models that Encompass Multiple Departments	P.T. Vanberkel; R.J. Boucherie; E.W. Hans; J.L. Hurink; N. Litvak
284	2009	Supporting Process Control in Business Collaborations	S. Angelov; K. Vidyasankar; J. Vonk; P. Grefen
283	2009	Inventory Control with Partial Batch Ordering	O. Alp; W.T. Huh; T. Tan
282	2009	Translating Safe Petri Nets to Statecharts in a Structure-Preserving Way	R. Eshuis
281	2009	The link between product data model and process model	J.J.C.L. Vogelaar; H.A. Reijers
280	2009	Inventory planning for spare parts networks with delivery time requirements	I.C. Reijnen; T. Tan; G.J. van Houtum
279	2009	Co-Evolution of Demand and Supply under Competition	B. Vermeulen; A.G. de Kok
278	2010	Toward Meso-level Product-Market Network Indices for Strategic Product Selection and (Re)Design Guidelines over the Product Life-Cycle	B. Vermeulen, A.G. de Kok
277	2009	An Efficient Method to Construct Minimal Protocol Adaptors	R. Seguel, R. Eshuis, P. Grefen
276	2009	Coordinating Supply Chains: a Bilevel Programming Approach	Ton G. de Kok, Gabriella Muratore
275	2009	Inventory redistribution for fashion products under demand parameter update	G.P. Kiesmuller, S. Minner
274	2009	Comparing Markov chains: Combining aggregation and precedence relations applied to sets of states	A. Busic, I.M.H. Vliegen, A. Scheller-Wolf
273	2009	Separate tools or tool kits: an exploratory study of engineers' preferences	I.M.H. Vliegen, P.A.M. Kleingeld, G.J. van Houtum
272	2009	An Exact Solution Procedure for Multi-Item Two-Echelon Spare Parts Inventory Control Problem with Batch Ordering	Engin Topan, Z. Pelin Bayindir, Tarkan Tan
271	2009	Distributed Decision Making in Combined Vehicle Routing and Break Scheduling	C.M. Meyer, H. Kopfer, A.L. Kok, M. Schutten
270	2009	Dynamic Programming Algorithm for the Vehicle	A.L. Kok, C.M. Meyer, H. Kopfer, J.M.J.

	Routing Problem with Time Windows and EC Social Legislation	Schutten
269 2009	Similarity of Business Process Models: Metics and Evaluation	Remco Dijkman, Marlon Dumas, Boudewijn van Dongen, Reina Kaarik, Jan Mendling
267 2009	Vehicle routing under time-dependent travel times: the impact of congestion avoidance	A.L. Kok, E.W. Hans, J.M.J. Schutten
266 2009	Restricted dynamic programming: a flexible framework for solving realistic VRPs	J. Gromicho; J.J. van Hoorn; A.L. Kok; J.M.J. Schutten;

Working Papers published before 2009 see: <http://beta.ieis.tue.nl>