

Erratum to "Water demand of amorphous nano silica and its impact on the workability of cement paste" [Cement and Concrete Research 42 (2012) 344–357]

Citation for published version (APA):

Quercia, G., Hüsken, G., & Brouwers, H. J. H. (2013). Erratum to "Water demand of amorphous nano silica and its impact on the workability of cement paste" [Cement and Concrete Research 42 (2012) 344–357]. *Cement and Concrete Research*, 46, 73–74. <https://doi.org/10.1016/j.cemconres.2012.12.002>

DOI:

[10.1016/j.cemconres.2012.12.002](https://doi.org/10.1016/j.cemconres.2012.12.002)

Document status and date:

Published: 01/01/2013

Document Version:

Accepted manuscript including changes made at the peer-review stage

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.



Erratum

Erratum to “Water demand of amorphous nano silica and its impact on the workability of cement paste” [Cem. Concr. Res. 42 (2012) 344–357]

G. Quercia^{a,b,*}, G. Hüsken^b, H.J.H. Brouwers^b

^a Materials Innovation Institute (M2i), Mekelweg 2, P.O. Box 5008, 2600 GA Delft, The Netherlands

^b Eindhoven University of Technology, Department of the Built Environment, P.O. Box 513, 5600 MB Eindhoven, The Netherlands

In Cement and Concrete Research 42 (2012) 344–357, Water demand of amorphous nano silica and its impact on the workability of cement paste, by G. Quercia, G. Hüsken, and H.J.H. Brouwers, units in the x-axis dimension in Figs. 3, 4 and 10 should be in micrometer (μm). The original figures should therefore be replaced by:

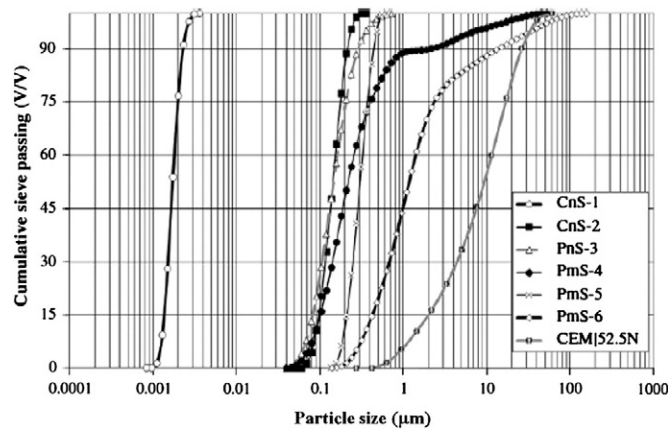


Fig. 3. PSD of the collected nano silica samples and the employed cement (CEM I 52.5 N).

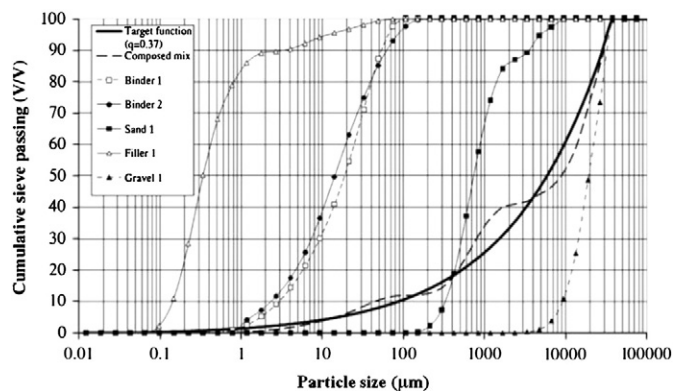


Fig. 4. Example of target line and composed mix derived from the optimization algorithm for cement paste.

DOI of original article: <http://dx.doi.org/10.1016/j.cemconres.2011.10.008>.

* Corresponding author at: Materials Innovation Institute (M2i), Mekelweg 2, P.O. Box 5008, 2600 GA Delft, The Netherlands.
E-mail address: g.quercia@tue.nl (G. Quercia).

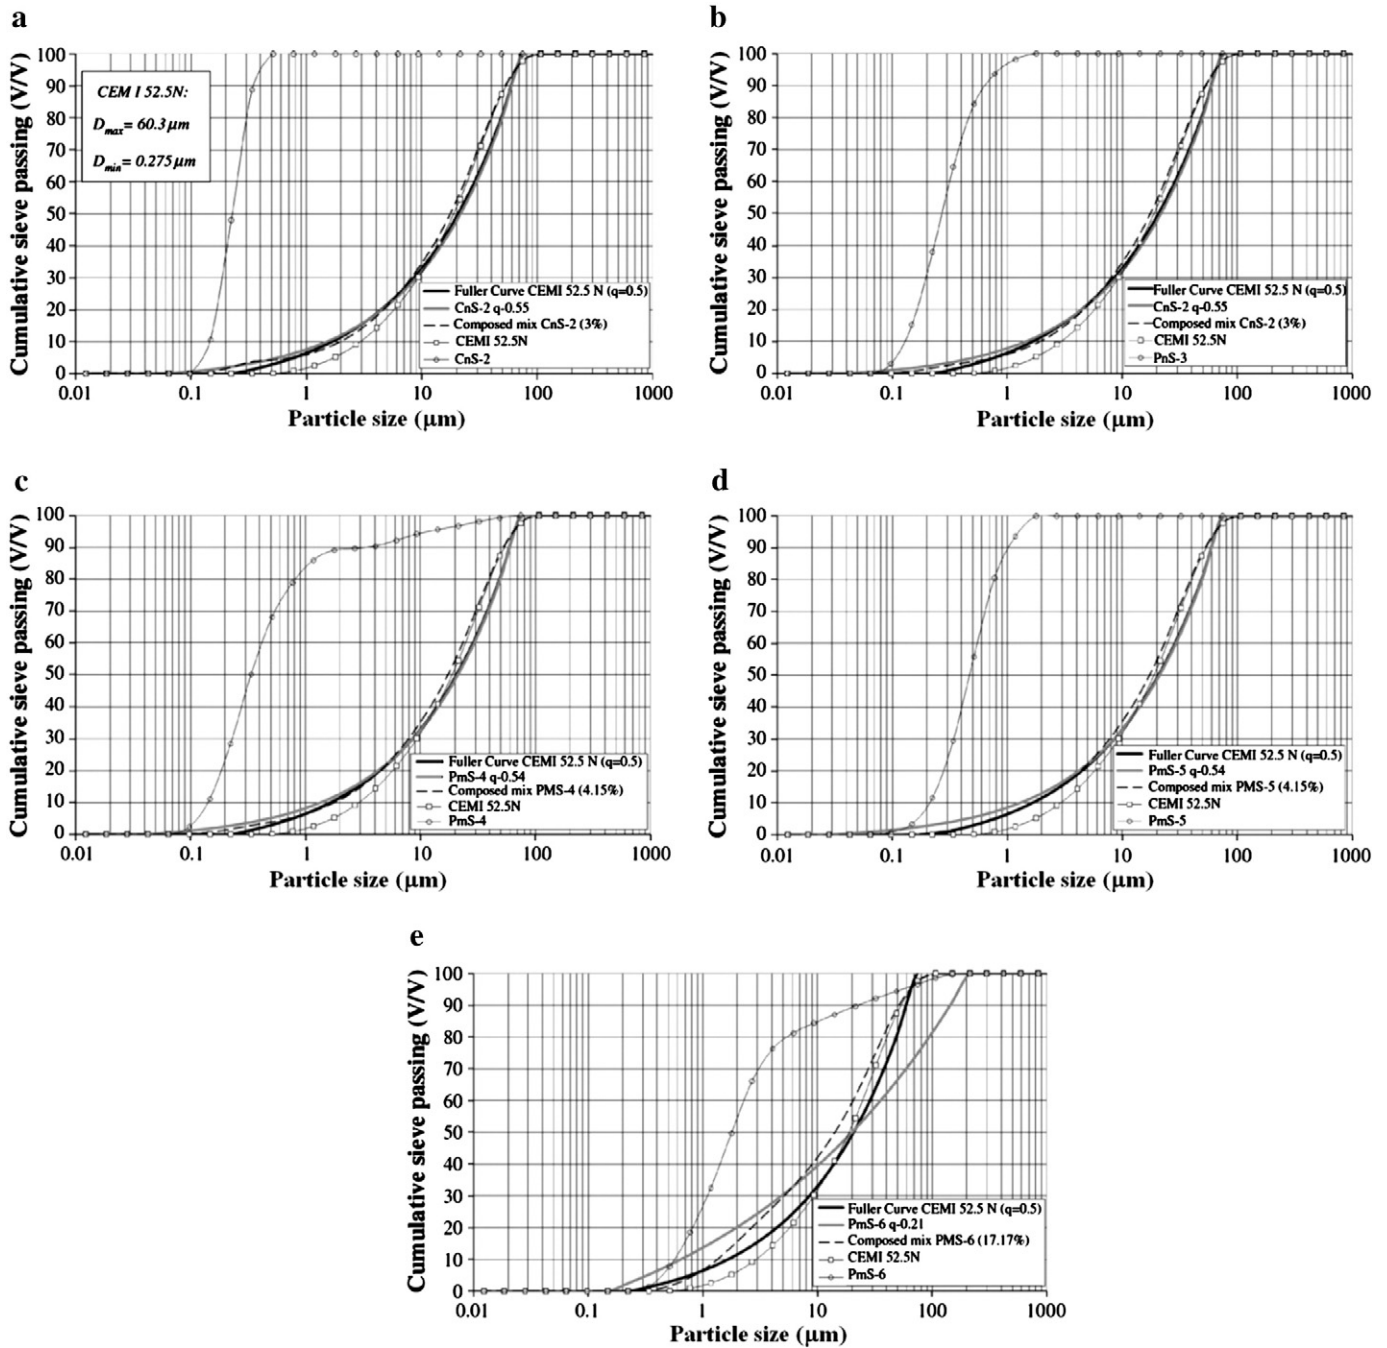


Fig. 10. (a) Target line and composed mix using the optimization algorithm for cement paste with CnS-2 (3% bwoc), and considering the best distribution modulus presented in Table 5 ($q = 0.55$, $D_{\min} = 0.079 \mu\text{m}$, and $D_{\max} = 60.3 \mu\text{m}$). (b) Target line and composed mix computed using the optimization algorithm for cement paste with PnS-3 (3.5% bwoc), and considering the best distribution modulus presented in Table 5 ($q = 0.55$, $D_{\min} = 0.079 \mu\text{m}$, and $D_{\max} = 60.3 \mu\text{m}$). (c) Target line and composed mix computed using the optimization algorithm for cement paste with PmS-4 (4.15% bwoc), and considering the best distribution modulus presented in Table 5 ($q = 0.54$, $D_{\min} = 0.053 \mu\text{m}$, and $D_{\max} = 60.3 \mu\text{m}$). (d) Target line and composed mix computed using the optimization algorithm for cement paste with PmS-5 (3.88% bwoc), and considering the best distribution modulus presented in Table 5 ($q = 0.54$, $D_{\min} = 0.035 \mu\text{m}$, and $D_{\max} = 60.3 \mu\text{m}$). (e) Target line and composed mix computed using the optimization algorithm for cement paste with PmS-6 (17.17% bwoc), and considering the best distribution modulus presented in Table 5 ($q = 0.21$, $D_{\min} = 0.182 \mu\text{m}$, and $D_{\max} = 180.0 \mu\text{m}$).

The typological errors have no further impact on the content of the paper.

Acknowledgment

The authors wish to thank Dr. Ismael Flores Vivian from the Advanced Cement-Based Materials Laboratory, Department of Civil Engineering and Mechanics, University of Wisconsin–Milwaukee, U.S.A. for retrieving the error in Fig. 3.