

Computation of a model milling machine (mathematical model II)

Citation for published version (APA):

Janssen, J. D., Janssen, L. G. J., Touwen, N. A. L., Veldpaus, F. E., & van der Wolf, A. C. H. (1971). *Computation of a model milling machine (mathematical model II)*. (TH Eindhoven. Afd. Werktuigbouwkunde, Laboratorium voor mechanische technologie en werkplaatstechniek : WT rapporten; Vol. WT0261). Technische Hogeschool Eindhoven.

Document status and date:

Published: 01/01/1971

Document Version:

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

COMPUTATION OF A MODEL MILLING MACHINE

(MATHEMATICAL MODEL II)

C.I.R.P. Group Ma, Co-operative Work on
Computer Aided Design and Analysis of
Machine Tool Structures.

by

J.D. Janssen,

L.G.J. Janssen,

N.A.L. Touwen,

F.E. Veldpaus,

A.C.H. van der Wolf.

Eindhoven, University of Technology, the Netherlands

Note to be presented to C.I.R.P. Group Ma, Paris, 1971.

1. INTRODUCTION

This report deals with the results of the computation of a model milling machine at the Eindhoven University of Technology. We started from the mathematical model (Fig. 1. and Table 1.) as proposed by the University of Louvain (Mathematical Model II). The computations were carried out at an EL-X8 digital computer with program A-4112 version 21.

The program language was Algol-60.

2. THE COMPUTERPROGRAM

The program is based on results obtained with the aid of the finite-elements-method. It is useful for the computation of the static and dynamic behaviour of arbitrary framed structures. Lumped masses as well as uniformly distributed mass can be taken into account.

The interesting stiffness-quantities of the elements are - in general - calculated from the length, the cross-sectional area, the second moments of area around the Y and Z axes and the material properties. However, the program offers the possibility to characterize some of the elements by direct input of the stiffness-quantities. Thus, it is possible to approximate hinges in the construction.

For further details see the report "Computation of a Model Milling Machine" of the Eindhoven University, which was presented to the C.I.R.P. Group Ma in Tirrenia 1970.

3. RESULTS OF THE COMPUTATION

3.1. General

For the computations we distinguish four versions of the mathematical model as pointed out in note 3 of Table 1. As can be seen, these versions differ only with respect to the elements 7, 9 and 30.

3.2. Static Results

Static deflection of all structural station points caused by unit forces applied between points 22 and 28 in X, Y and Z directions are calculated.

Table 2. and Figs. 2., 3. and 4. show the results of version 2. The four versions of the model did not show a significant difference in the results as far as static loading is concerned. The preparation time for static computations was 193 secs. The computing time for one loading case was 22 secs. The computer was used in a time-sharing system.

3.3. Dynamic Results

We calculated the natural frequencies of the lowest 10 modes of vibration.

Figs. 5., 6., 7., 8., 9., 10., 11., 12., 13. and 14. show the results of version 2. In addition to this, Table 3. gives the natural frequencies of the respective modes for the four versions of the model.

The preparation and computing time for these 10 modes was approximately 2500 secs.

4. DISCUSSION

As pointed out earlier, we computed four versions of the mathematical model.

All these versions had uniformly distributed mass with lumped masses in some station points (see Table 1., note 2).

From a static point of view, the mathematical model seems to be reliable. However, there are some contradictions in the input data as distributed by Louvain, for instance:

- the term L/EIY for element 18 cannot be correct
- the remark "Shear influence is not taken into account" is not valid.

The input data of our computations are listed in Table 1.

Dynamically, there are more objections against the proposed model.

Especially, the quantities of the elements 7, 9 and 30 are to be considered more carefully. For example, the fifth mode of version 1 and 2, does not exist in version 3 and 4.

ELEMENT	L[m]	A[m ²]	IY[m ⁴]	IZ[m ⁴]	J[m ⁴]	M[kg]
1	0.0750	3.560E-4	0.1000E-4	0.2500E-4	0.7500E-2	0
2	0.2025	2.105E-2	0.2020E-3	0.7103E-3	0.3980E-3	33.25
3	0.1175	2.105E-2	0.1551E-3	0.5602E-3	0.3100E-3	19.39
4	0.0850	2.105E-2	0.1551E-3	0.5602E-3	0.3100E-3	13.95
5	0.0355	-	-	-	-	0
6	0.1150	1.787E-2	0.1054E-3	0.3969E-3	0.2150E-3	16.02
7	0		see note 3			0
8	0.2270	-	-	-	-	0.70
9	0		see note 3			0
10	0.1150	-	-	-	-	0
11	0.0850	-	-	-	-	0
12	0.2625	-	-	-	-	0.70
13	0.1750	1.187E-2	0.7587E-4	0.7396E-4	0.1030E-3	16.20
14	0.1400	1.187E-2	0.7587E-4	0.7396E-4	0.1030E-3	12.96
15	0.1600	-	-	-	-	0
16	0.2750	4.490E-3	0.5006E-5	0.1303E-4	0.6690E-5	9.63
17	0.2750	4.490E-3	0.5006E-5	0.1303E-4	0.6690E-5	9.63
18	0.2150	1.787E-2	0.1054E-3	0.3969E-3	0.2150E-3	29.96
19	0.0320	-	-	-	-	0
20	0.1950	1.501E-2	0.6016E-4	0.2434E-3	0.1290E-3	25.56
21	0.1950	-	-	-	-	2.95
22	0.1750	7.100E-4	0.3976E-7	0.3976E-7	0.7950E-7	0.97
23	0.1400	7.100E-4	0.3976E-7	0.3976E-7	0.7950E-7	0.78
24	0.1350	1.501E-2	0.6016E-4	0.2434E-3	0.1290E-3	15.81
25	0.950	-	-	-	-	0
26	0.1750	3.660E-3	0.4717E-5	0.1136E-5	0.1320E-4	5.00
27	0.1400	3.660E-3	0.4717E-5	0.1136E-5	0.1320E-4	4.00
28	0.3650	-	-	-	-	0
29	0.1350	3.420E-3	0.1042E-4	0.2681E-5	0.8680E-5	3.60
30	0		see note 3			0

Table 1.

L = length

A = beam cross sectional area

IY, IZ = second moment of area about Y and Z axes respectively

J = effective second polar moment of area

E = 2.10E+11 N/m²

G = 0.81E+11 N/m²

ρ = 7.8E+3 kg/m³

station point	Load in X direction			Load in Y direction			Load in Z direction		
	X deflection	Y deflection	Z deflection	X deflection	Y deflection	Z deflection	X deflection	Y deflection	Z deflection
1	0	0	0	0	-.8814E-10	-.1165E-9	0	+.6445E-9	+.5042E-9
2	0	0	0	0	-.5695E-9	-.1219E-9	0	+.4263E-8	+.5272E-9
3	0	0	0	0	-.8611E-9	-.1249E-9	0	+.6513E-8	+.5405E-9
4	0	0	0	0	+.7089E-9	-.1286E-9	0	-.6423E-9	+.1985E-7
5	0	0	0	0	+.7083E-9	-.2274E-8	0	-.6423E-9	+.2685E-7
6	0	0	0	0	+.2772E-7	-.2280E-8	0	-.4986E-7	+.5762E-7
7	0	0	0	0	+.2772E-7	-.2280E-8	0	-.4986E-7	+.5762E-7
8	0	0	0	0	+.2772E-7	-.5338E-9	0	-.4986E-7	-.4620E-8
9	0	0	0	0	+.2772E-7	+.5338E-9	0	-.4986E-7	-.4620E-8
10	0	0	0	0	+.1128E-7	+.5338E-9	0	-.1745E-7	-.4620E-8
11	0	0	0	0	-.8611E-9	+.5338E-9	0	+.6513E-8	-.4620E-8
12	0	0	0	0	-.8611E-9	+.5338E-9	0	+.6513E-8	-.4620E-8
13	-.1150E-6	0	0	0	-.5892E-7	+.4801E-6	0	-.1745E-7	-.6742E-7
14	-.2531E-6	0	0	0	-.8592E-7	+.1267E-5	0	-.1745E-7	-.1625E-6
15	-.1877E-5	0	0	0	-.9587E-6	+.4801E-6	0	+.9122E-7	-.6742E-7
16	-.1877E-5	+.271 E-6	+.3028E-5	0	-.9587E-6	+.4801E-6	0	+.9122E-7	-.6742E-7
17	-.1877E-5	-.2711E-6	-.3028E-5	0	-.9587E-6	+.4801E-6	0	+.9122E-7	-.6742E-7
18	+.3533E-6	0	0	0	+.2212E-6	-.2280E-8	0	-.3080E-6	+.1149E-6
19	+.5121E-6	0	0	0	+.2212E-6	-.4208E-7	0	-.3080E-6	+.1699E-6
20	+.1281E-5	0	0	0	+.5121E-6	-.4208E-7	0	-.7809E-6	+.2318E-6
21	+.3595E-5	0	0	0	+.5121E-6	-.3572E-6	0	-.7809E-6	+.8423E-6
22	+.3390E-4	0	0	0	+.1544E-5	-.4640E-6	0	-.6050E-6	+.2226E-4
23	+.2782E-4	0	0	0	+.1429E-5	-.4186E-7	0	-.4643E-6	+.5209E-5
24	+.1863E-5	0	0	0	+.7292E-6	-.4204E-7	0	-.1247E-5	+.2562E-6
25	+.4781E-5	0	0	0	+.7292E-6	-.3528E-6	0	-.1247E-5	+.9902E-6
26	+.1390E-4	0	0	0	+.7568E-6	-.3802E-6	0	-.1281E-5	+.2964E-5
27	+.2525E-4	0	0	0	+.7789E-6	-.4203E-7	0	-.1308E-5	+.5102E-5
28	-.5896E-5	0	0	0	-.3011E-5	+.4801E-6	0	+.3391E-6	-.6742E-7
29	+.2782E-4	0	0	0	+.1429E-5	-.4186E-7	0	-.4643E-6	+.5209E-5
30	0	0	0	0	-.8611E-9	+.5338E-9	0	+.6513E-8	-.4620E-8

Table 2. Load +1000 N at 22 and -1000 N at 28 in the X, Y, and Z directions separately. The deflections are given in [m/1000N].

Mode	version 1	version 2	version 3	version 4
1	74	124	74	143
2	113	171	113	169
3	269	282	275	291
4	287	376	287	328
5	444	517	638	645
6	638	644	692	725
7	756	781	900	915
8	904	921	978	986
9	1073	1087	1087	1088
10	1087	1088	1286	1287

Table 3. Natural Frequencies [Hz] for the versions 1, 2, 3, and 4.

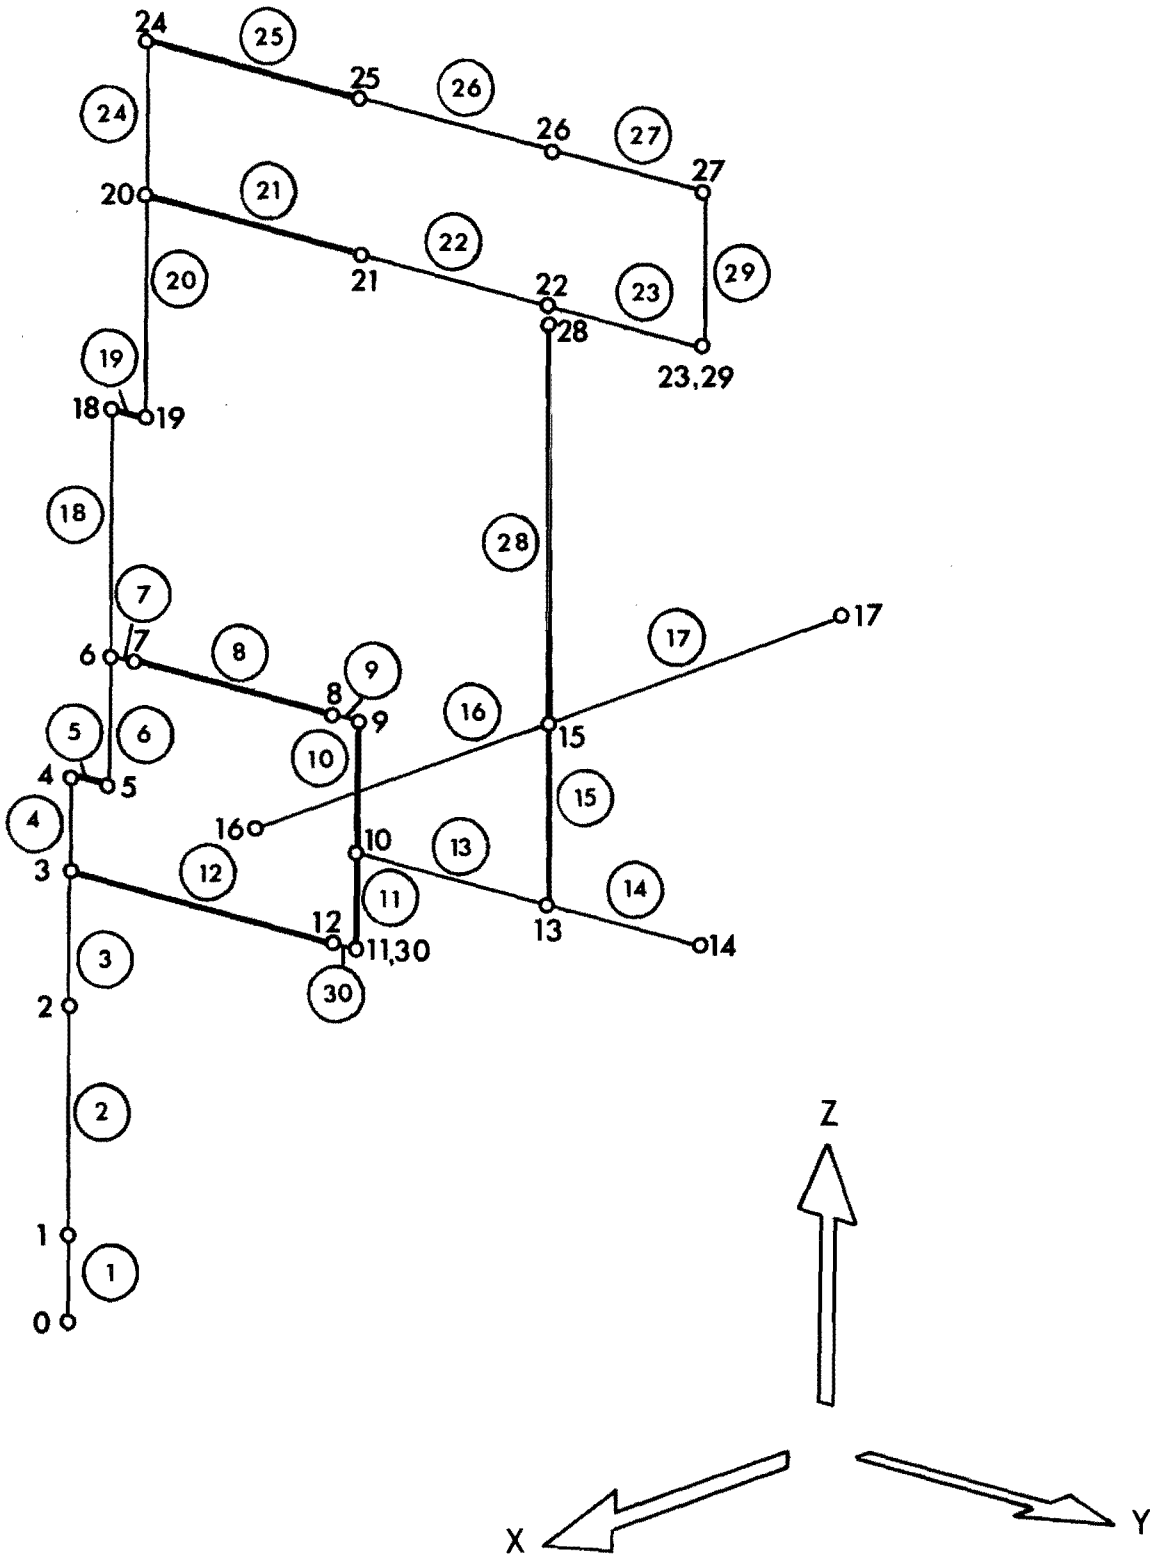


Fig. 1. Mathematical model II of the milling machine.

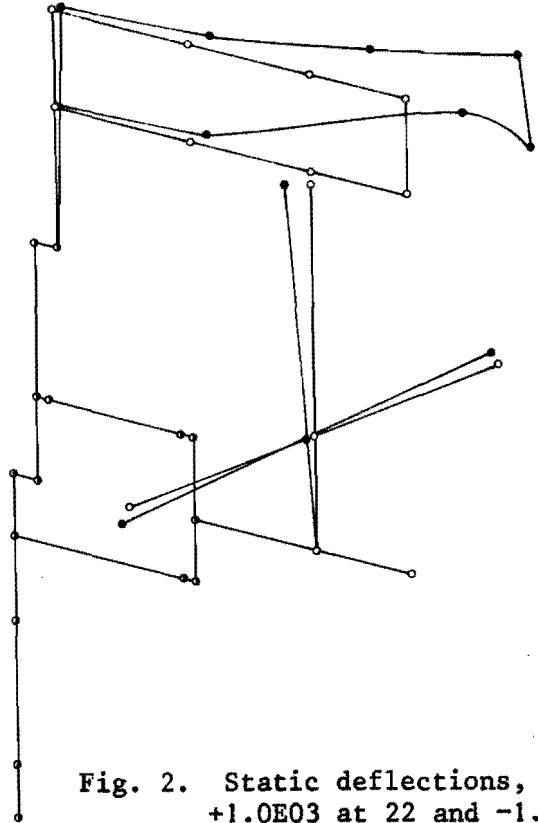
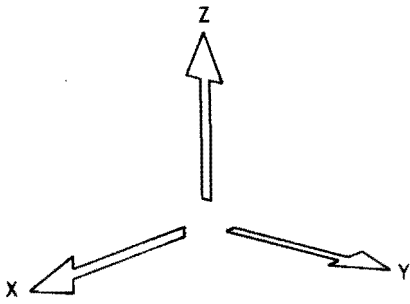


Fig. 2. Static deflections, load +1.0E03 at 22 and -1.0E03 at 28 in X direction.

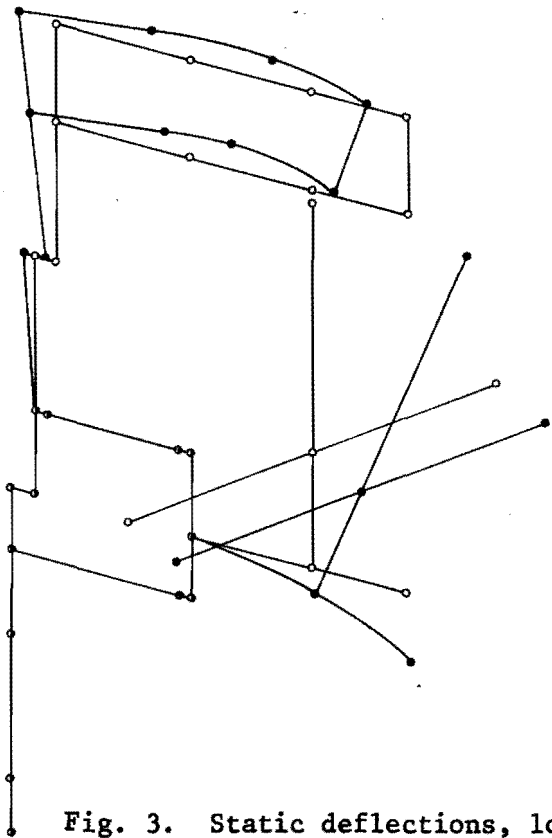
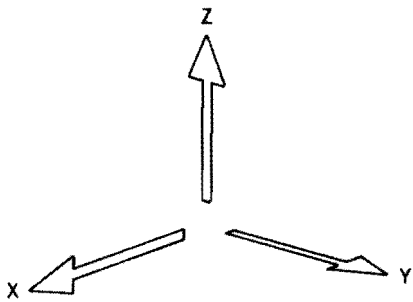
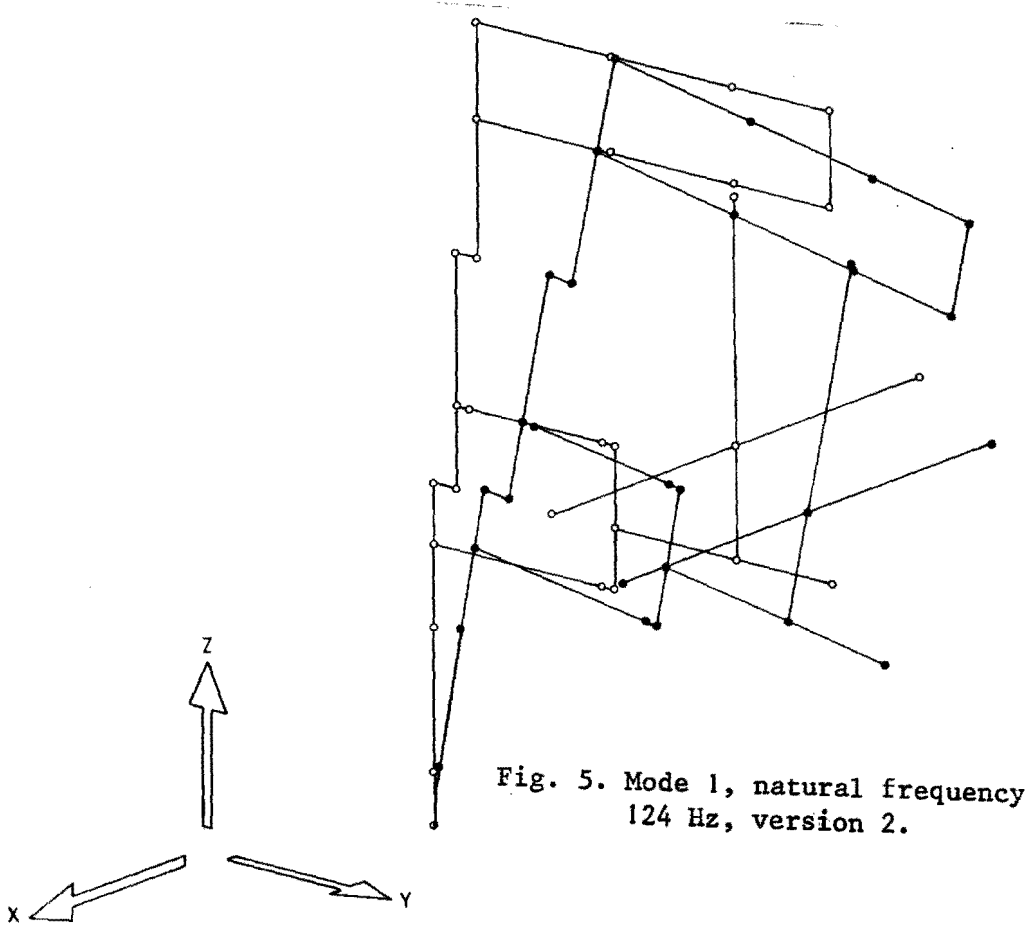
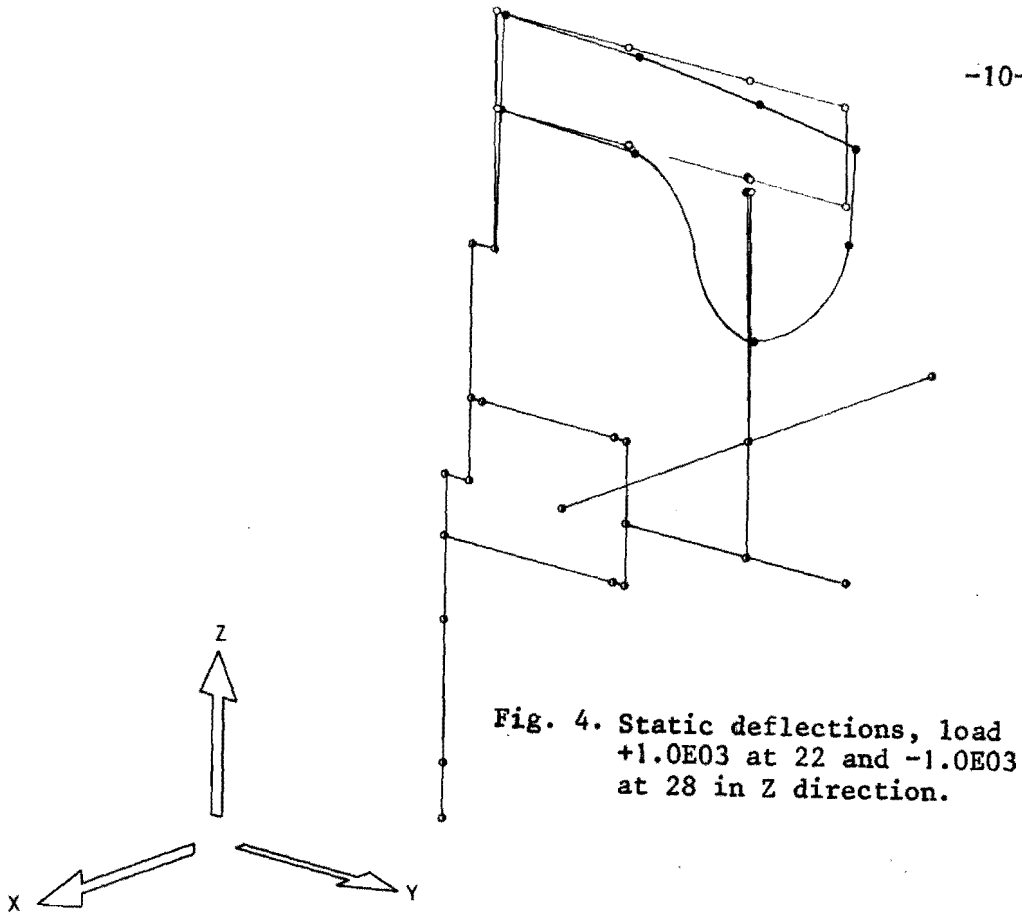


Fig. 3. Static deflections, load +1.0E03 at 22 and -1.0E03 at 28 in Y direction.



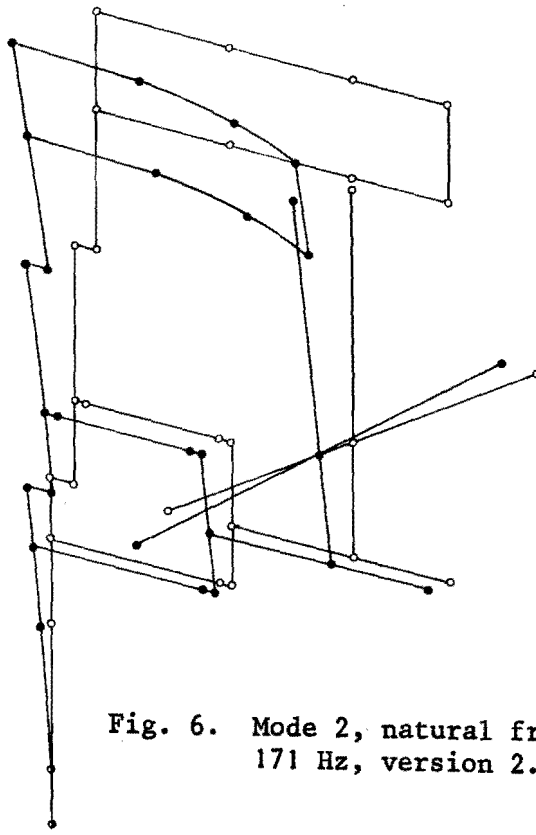
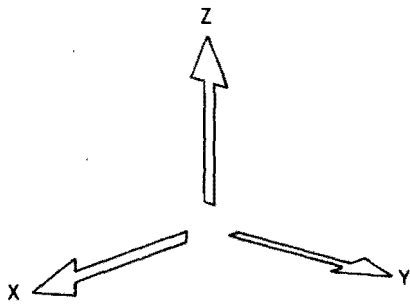


Fig. 6. Mode 2, natural frequency 171 Hz, version 2.

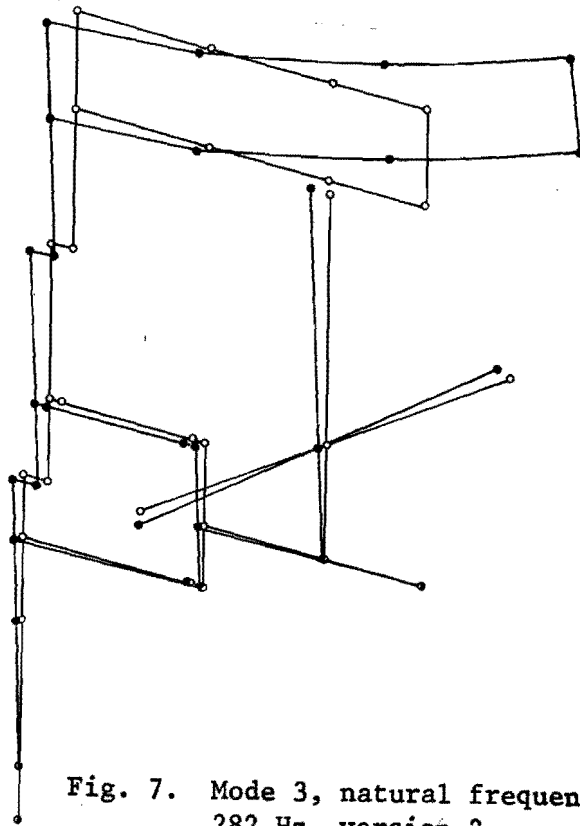
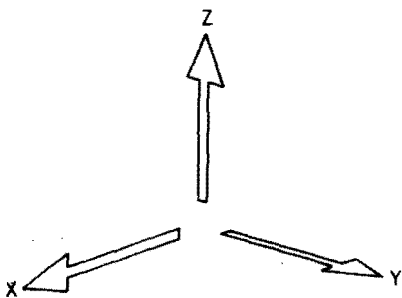


Fig. 7. Mode 3, natural frequency 282 Hz, version 2.

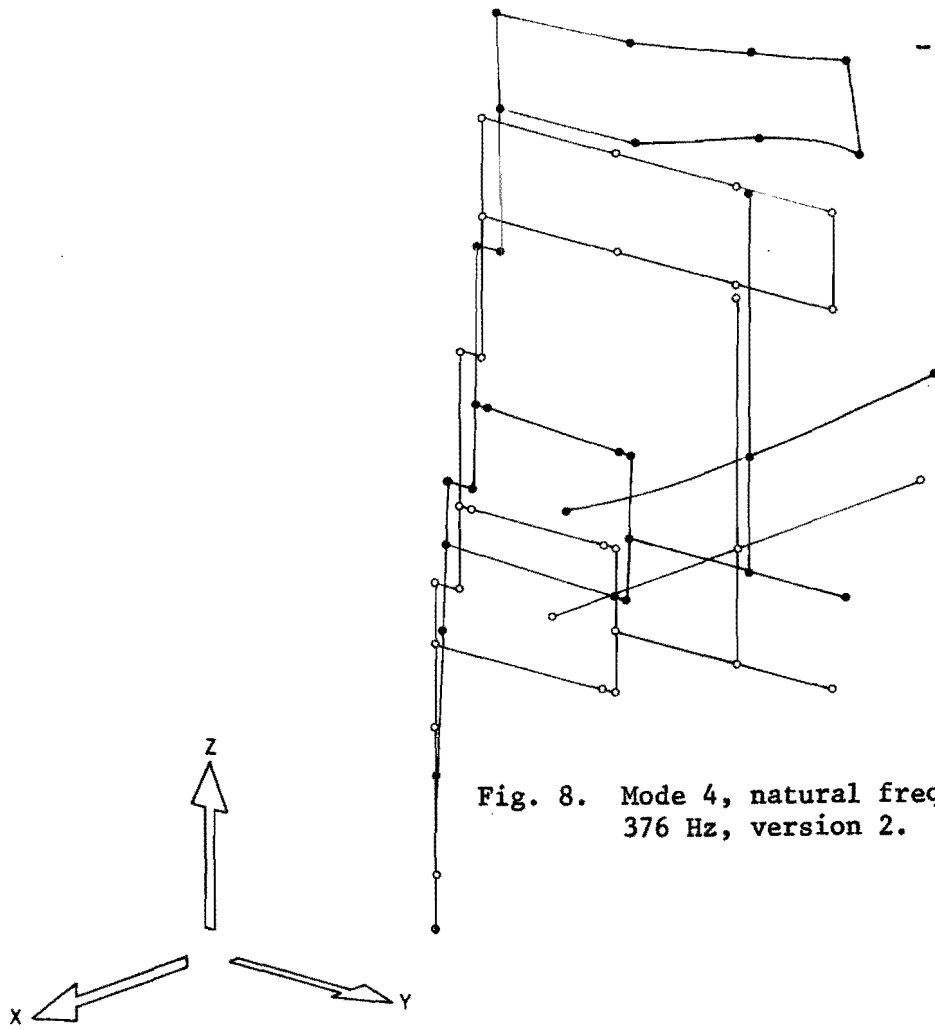


Fig. 8. Mode 4, natural frequency 376 Hz, version 2.

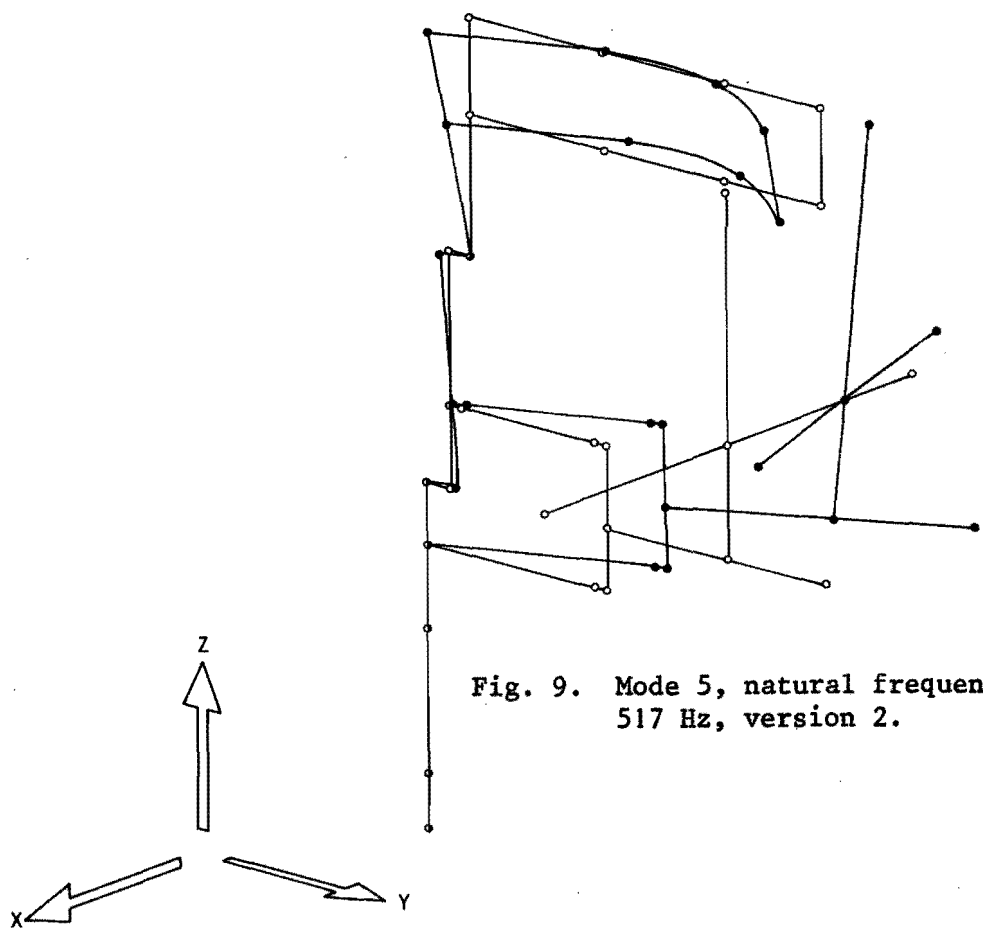


Fig. 9. Mode 5, natural frequency 517 Hz, version 2.

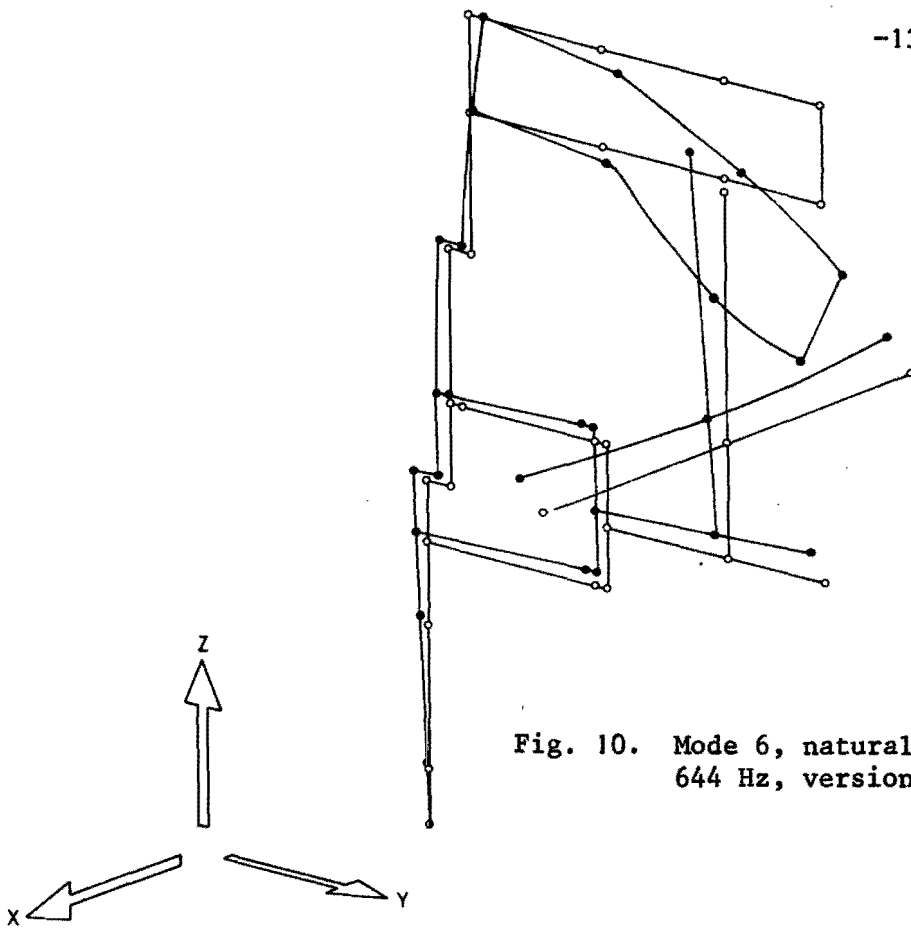


Fig. 10. Mode 6, natural frequency 644 Hz, version 2.

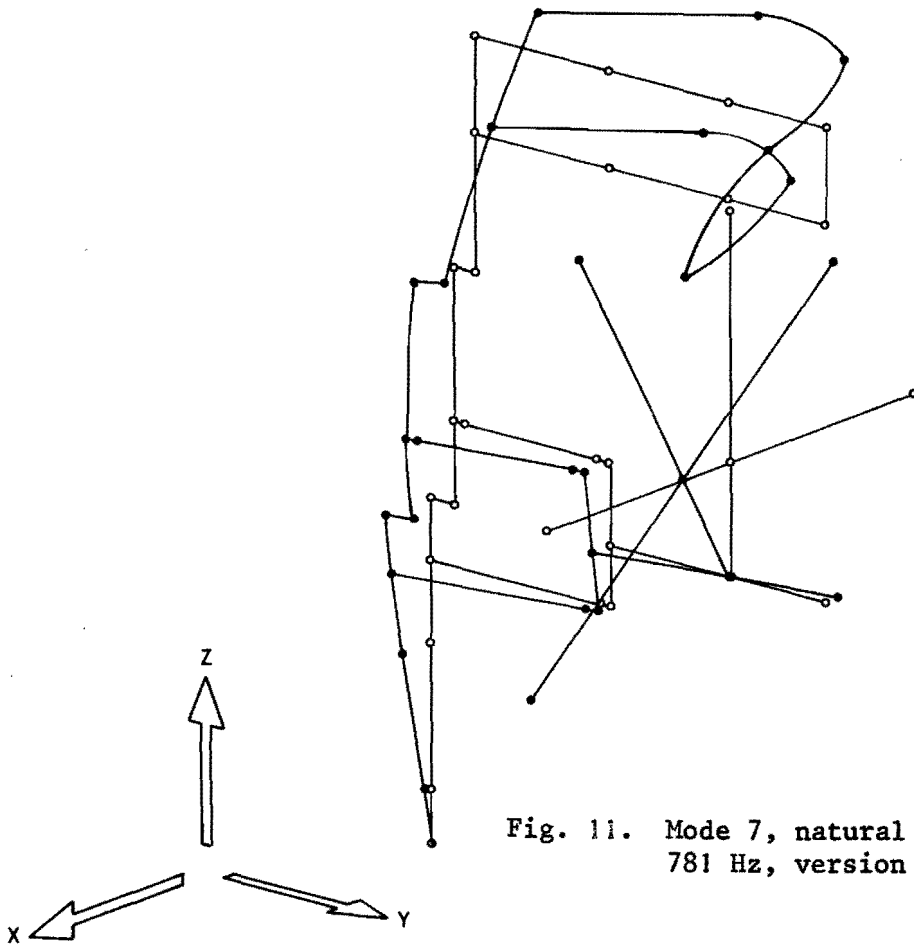


Fig. 11. Mode 7, natural frequency 781 Hz, version 2.

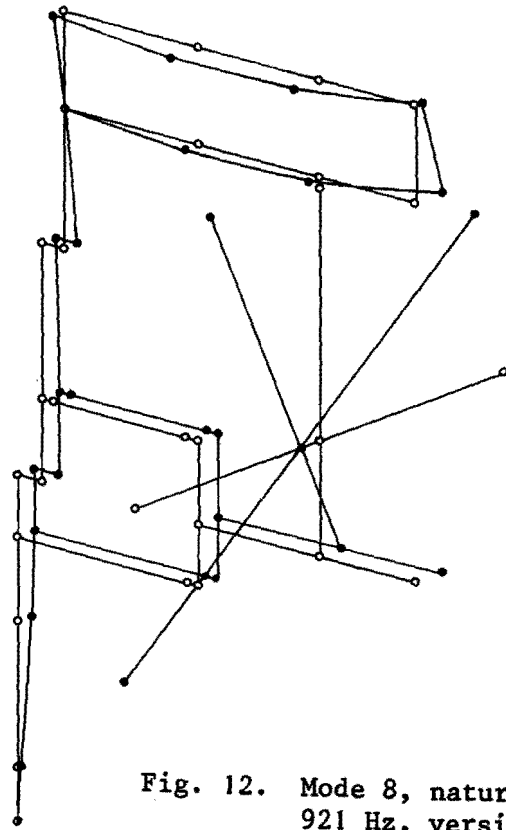
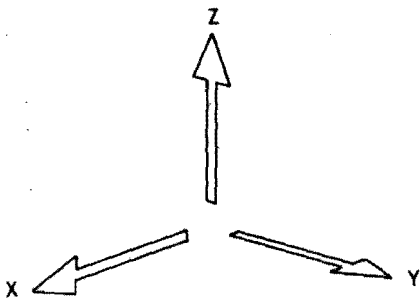


Fig. 12. Mode 8, natural frequency 921 Hz, version 2.

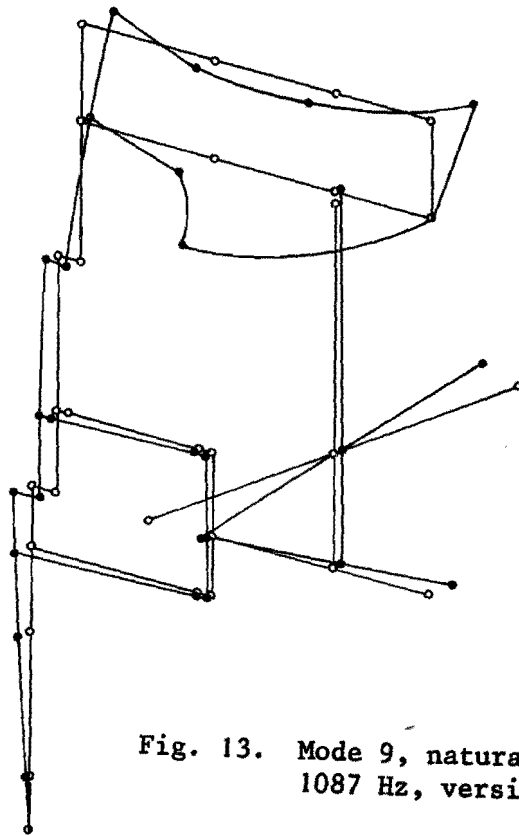
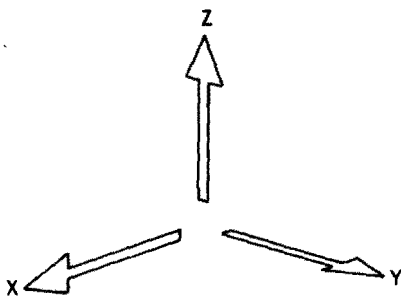


Fig. 13. Mode 9, natural frequency 1087 Hz, version 2.

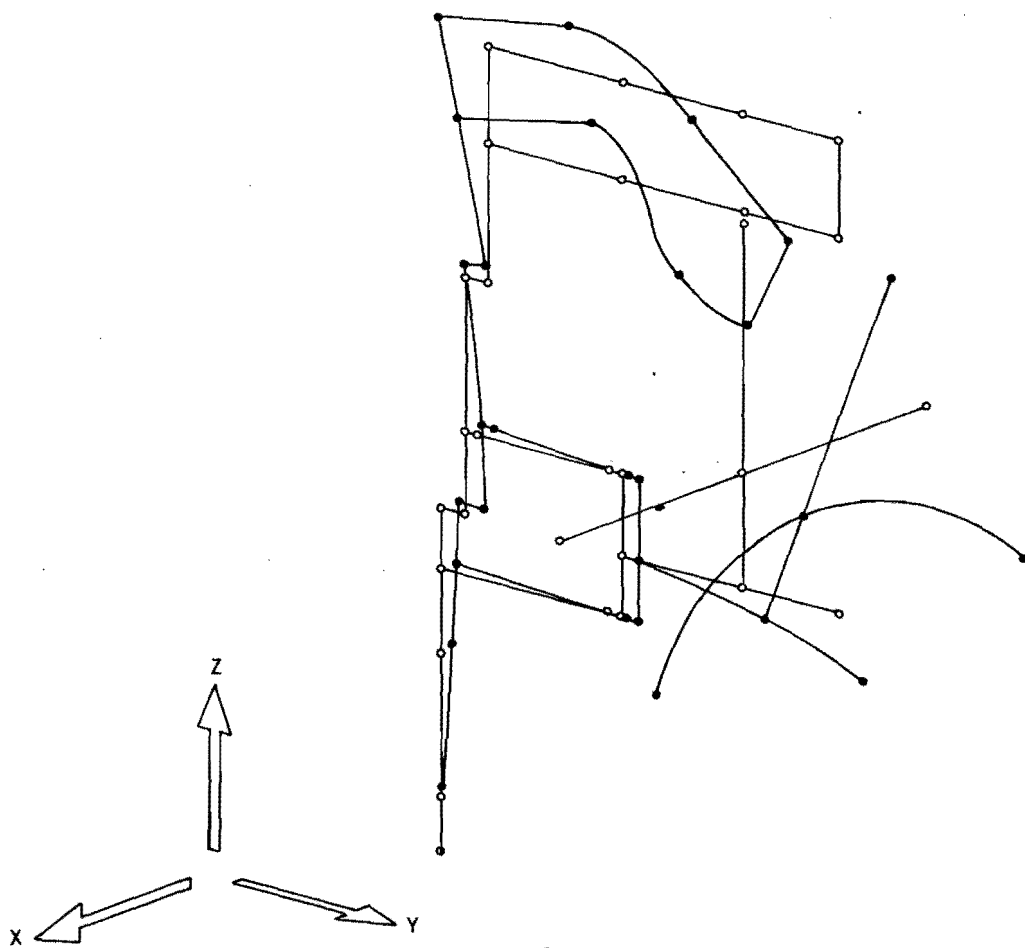


Fig. 14. Mode 10, natural frequency 1088 Hz, version 2.