

Input modification to enhance speed of SMA-actuation

Citation for published version (APA):

Gaasbeek, R. I., & de Jager, A. G. (2017). *Input modification to enhance speed of SMA-actuation*. Abstract from 36th Benelux Meeting on Systems and Control, 28-30 March 2017, Spa, Belgium, Spa, Belgium.

Document status and date:

Published: 01/01/2017

Document Version:

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

Input modification to enhance speed of SMA-actuation

Rolf Gaasbeek and Bram de Jager

Eindhoven University of Technology, Department of Mechanical Engineering, P.O. Box 513, 5600 MB Eindhoven, The Netherlands.

Email: R.I.Gaasbeek@tue.nl *

1 INTRODUCTION

In micro-robotics, active materials are used to construct extremely small actuators. If requirements on force and/or stroke are challenging, a logical candidate material is Shape Memory Alloy (SMA). By manipulating stress or temperature, the crystallographic structure of SMA can change, resulting in significant strain effects.

The SMA actuators considered in this work are constructed using pre-stressed SMA wires. By manipulating the temperature, an actuating effect is obtained. As temperature rates are limited, the actuation speed of the SMA actuator is limited. The latter, in combination with the inherent hysteresis present in SMA actuators, are the main challenges in obtaining high performance for SMA actuators in general.

In Figure 1, temperature and strain data for a full actuation cycle of a bias-spring actuator set-up [1], is depicted. Strong hysteresis is present, as the crystallographic structure changes at a significantly higher temperature when heating, compared to the low transition temperatures in case of cooling. If the material is overheated (dark grey region), thermal energy is added even after full transition is achieved. Note that, heating after full transition is undesired as the thermal energy has to be removed when an opposite movement of the actuator is required. The latter, due to the limited temperature rate, significantly slows down the actuation speed of the actuator. Following the same reasoning, overcooling (light grey region) is undesirable as well.

Input modifications have been proposed in an attempt to prevent over- and underheating (grey areas in Figure 1). Specifically, modifications based on temperature [3], power or resistance are documented [2].

Unfortunately, the bounds at which over-heating and -cooling occurs, depend on the fraction of transformed material. This fraction is known to be both stress and temperature dependent [1]. Therefore, current methods do not suffice when load is applied, which is typically the case in practical applications.

In this work it is proposed to use the Novak model [1] to estimate the fraction of transformed material based on resistance, temperature and stress. Additionally, fraction-based input constraints are applied to the input to prevent over-heating and cooling. As an extension to [1], the method is not only compared to a benchmark feedback controller but also with the temperature-based input modifications proposed in [3].

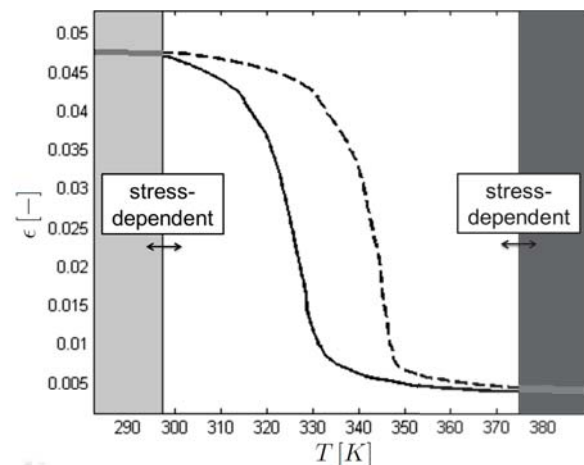


Figure 1: Temperature-strain curve SMA actuator; dashed line: heating, solid line: cooling.

References

- [1] Rolf Gaasbeek and Bram de Jager, "Fraction-based input modification for fast SMA-actuation," *IEEE Conference on Control Applications*, 1525-1530, 2016.
- [2] Yee Harn Teh and Roy Featherstone, "An Architecture for Fast and Accurate Control of Shape Memory Alloy Actuators", *The International Journal of Robotics Research*, 595-611, 2008.
- [3] Katsutoshi Kuribayashi, "Improvement of the Response of an SMA Actuator Using a Temperature Sensor", *The International Journal of Robotics Research*, 10(1):1320, 1991

*The research leading to these results is part of INCITE (grant #621278), an Eniac Joint Undertaking project that is co-funded by grants from the Netherlands, Finland, Hungary, France, Ireland, Sweden, Spain, and Poland.