

Beyond traditional sampling strategies for enhanced performance and cost-effectiveness

Citation for published version (APA):

van Zundert, J., Oomen, T. A. E., Goswami, D., & Heemels, M. (2016). Beyond traditional sampling strategies for enhanced performance and cost-effectiveness. In *3rd Conference on Precision Mechatronics, DSPE2016, 4-5 October 2016, Sint Michielsgestel, The Netherlands* (pp. 127-128).

Document status and date:

Published: 01/10/2016

Document Version:

Accepted manuscript including changes made at the peer-review stage

Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

www.tue.nl/taverne

Take down policy

If you believe that this document breaches copyright please contact us at:

openaccess@tue.nl

providing details and we will investigate your claim.

Beyond Traditional Sampling Strategies for Enhanced Performance and Cost-Effectiveness

Jurgen van Zundert¹, Tom Oomen¹, Dip Goswami², Maurice Heemels¹

Eindhoven University of Technology: ¹Control Systems Technology group, ²Electronic Systems group
j.c.d.v.zundert@tue.nl

Abstract

In classical motion control applications a single-rate, equidistant sampling scheme is used. This imposes a hard trade-off between cost-effectiveness and performance. The aim of this research is to relax this trade-off through several approaches, including non-equidistant sampling.

Non-equidistant sampling

In order to reduce cost, multiple applications are often executed on a single embedded platform, e.g., in case of visual servoing, where the resource allocation is taken care of by a scheduling policy. Due to the scheduling, the applications are sampled in a non-equidistant sampling sequence, as illustrated in Fig.1. Realizing equidistant sampling on such platforms is inflexible, expensive in terms of resource, and conservative in terms of performance since control points are discarded. This can be observed in Fig. 1 where the non-equidistant sampling sequence (red) has a control point at time Δ^0 , whereas equidistant sampling sequence (yellow) does not. Our aim is to relax the equidistant sampling requirement, where a key challenge lies in the fact that typical motion control design approaches are not directly applicable in this situation.

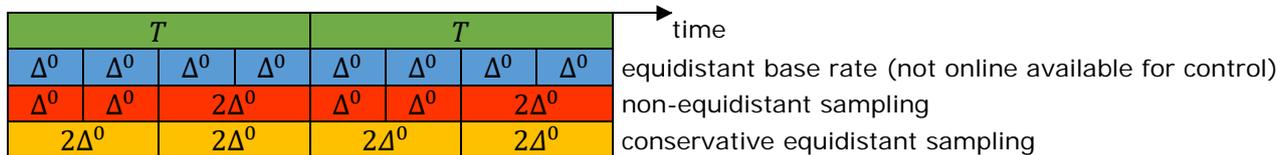


Fig.1 Example timeline of different processes executed on a single processor. Due to platform limitations, the equidistant base rate (blue) is not available for online control. The non-equidistant sampling (red) is available for control and provides an additional control point in each period (green) compared to conservative equidistant sampling (yellow).

Relaxing this requirement is possible due to recent developments in embedded platforms such as the Composable and Predictable System on Chip (CompSOC) platform [2]. The platform composability allows for independent development of multiple applications, while predictability provides precise temporal behavior of the platform. The combination results in a set of known, precise, and periodically varying sampling periods, see Fig.1.

Currently, we are developing a control design framework that exploits the non-equidistant sampling and can potentially break the traditional performance/cost trade-off. Our approach is based on a finite-time lifted representation of the system. The framework enables optimal (feedforward) controller design incorporating non-equidistant sampling. A preliminary motion control case study demonstrates the benefit of exploiting non-equidistant sampling, see Fig.2.

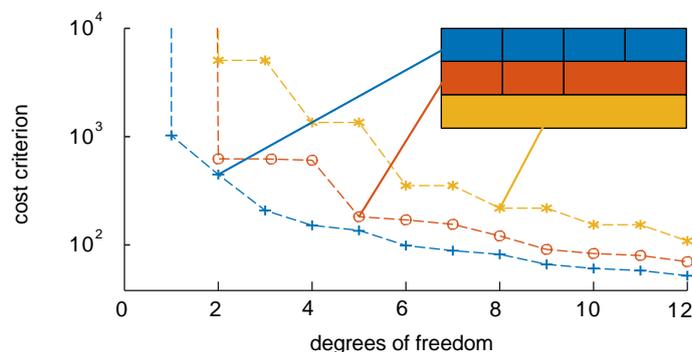


Fig.2 Performance criterion V^0 (lower is better performance) as function of the number of feedforward filter parameters for the three different sampling sequences of Fig.1. Due to the additional control point, the non-equidistant sampling sequence (red) yields better performance than the conservative equidistant sampling sequence (orange).

Acknowledgement

The authors would like to acknowledge the important contributions of Martijn Koedam.

References

- [1] Zundert J. van, Oomen T., Goswami D., Heemels W.P.M.H., On the Potential of Lifted Domain Feedforward Controllers with a Periodic Sampling Sequence. In Proceedings of the 2016 American Control Conference, Boston, MA, 2016.
- [2] Goossens K., Azevedo A., Chandrasekar K., Gomony M.D., Goossens S., Koedam M., Li Y., Mirzoyan D., Molnos A., Beyranvand Nejad A., Nelson A., and Sinha S., Virtual Execution Platforms for Mixed-Time-Criticality Systems: The CompSOC Architecture and Design Flow. ACM SIGBED Review, 10(3):23–34, October 2013.